

Fixture Name: Heartwood 8063-WSC BUS



This fixture assembled PO: _____ Date: _____

Notice: Please review the parts listing and check for all parts before assembling the fixture. If any parts are missing or damaged, please note on this sheet and contact the place of purchase to arrange for replacement parts.

PARTS LIST

Company Name: _____ Co. Account #: _____

to be filled out by retailer

Mounting strap	1ea		Mounting screws	2ea		Fixture mounting screws	2ea	
Hex nut	3ea		Wire connectors	2ea		Deco nut	2ea	
Nipple (Threaded rod)	1ea					Bottom assembly	1ea	
Flat washer	1ea		Rubber washer	1ea		Finial	1ea	

Part Needed	_____	Quantity	_____
Part Needed	_____	Quantity	_____
Reason why	(missing, scratched, broken glass, bent, bad finish)		
Comments	_____		


FIXTURE ASSEMBLY INSTRUCTIONS

Read and review installation instruction sheet before assembling the fixture.

1. Place the Glass Shade(L) into the Fixture Frame(M) with the notches in back of glass fitting over the cross piece on back of frame.
2. Align the center hole of the Glass Shade (L) with the hole in bottom of frame backplate (M).
3. Place the Rubber Washer(P) and the Flat Washer(O) over the Nipple (Q) and secure with the Hex Nut (N) approximately 3/4" down the Nipple(Q).
4. Thread the Nipple(Q) through the bottom hole of the Glass Shade(L) into the hole of Frame backplate(M) and through the Hexnut attached inside the backplate. Thread until snug to the glass.
5. Slide the Bottom Assembly (R) over the Nipple(Q), screw the Finial(S) until tight.
6. Install the light bulb in accordance with the fixture's specifications.

(DO NOT EXCEED MAXIMUM WATTAGE RATING!)

NOTE: INSTALL THE GLASS ASSEMBLY AFTER THE FIXTURE IS HUNG.

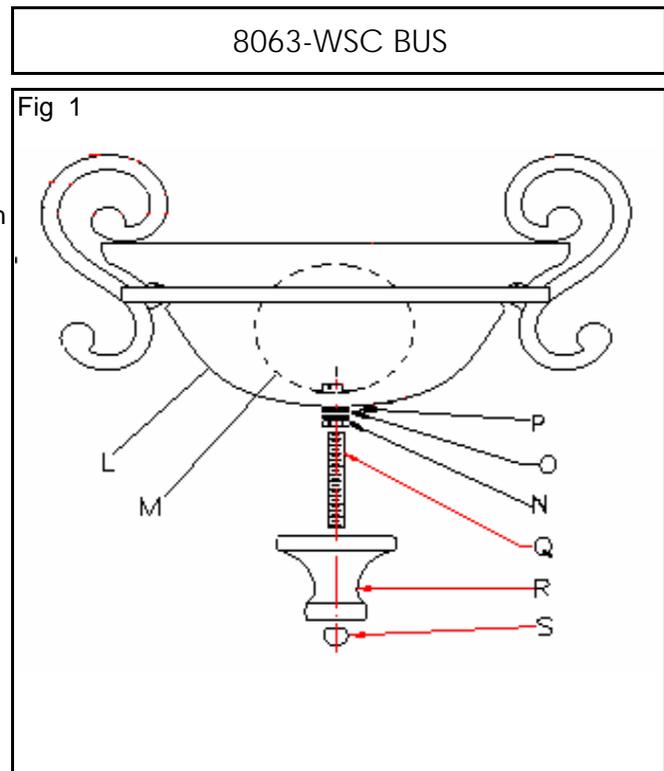

Fixture Name: Heartwood 8063-WSC BUS

For Wall Mount Light Fixture

WARNING ! SHUT OFF POWER AT FUSE OR CIRCUIT BREAKER.

HANGING THE FIXTURE (Fig.1)

1. Carefully remove the new fixture from the carton and the yellow bag that holds all your parts. Check that all parts are included as shown in the illustration and parts list.
2. Shut off power at the circuit breaker and remove the old fixture from wall, including the old mounting strap.
3. The Mounting Strap(F) contains several pairs of threaded holes, find the pair of holes that match the holes spacing in your fixture Back Plate(M) and thread the two Fixture Mounting Screws(D) half way into the Mounting Strap(F) and secure with Hex Nut (G).
4. Place the Mounting Strap(F) over the Junction Box (A) so the Fixture Mounting Screws(D) are vertical or horizontal, as required by fixture type.
5. Attach the Mounting Strap(F) to the Junction Box using the two Mounting screws(H) and tighten securely with screw driver.

CONNECTING THE WIRES (Fig 2)

6. Attach the power supply wires to the fixture lead wires by connecting BLACK to BLACK (or SMOOTH) and WHITE to WHITE (or RIBBED).
 7. Attach the GROUND wire(GREEN or COPPER) from the Junction Box and the fixture Ground wire to the green Ground Screw (I) on the Mounting Bracket (F) or connect both wires together using the correct size of wire connectors. -
- NOTE: Twist the wires together in the same direction you twist the wire connector (L) onto the wires.
8. Tuck these wire connections neatly into the Junction Box.

FINISHING THE INSTALLATION (Fig.3)

9. After tucking these wire connections neatly into the Junction Box and place the fixture Back Plate(M) over the two Mounting Screws(D) and secure the Back Plate(M) against the wall by threading two Deco Nuts(J) over the two Mounting Screws(D) until tight as shown on Fig.3.
 10. Install the light bulbs and glass shade as per the fixture assembly sheet.
- YOUR INSTALLATION IS NOW COMPLETE.
RETURN POWER TO THE JUNCTION BOX AND TEST THE FIXTURE.

Fig. 1

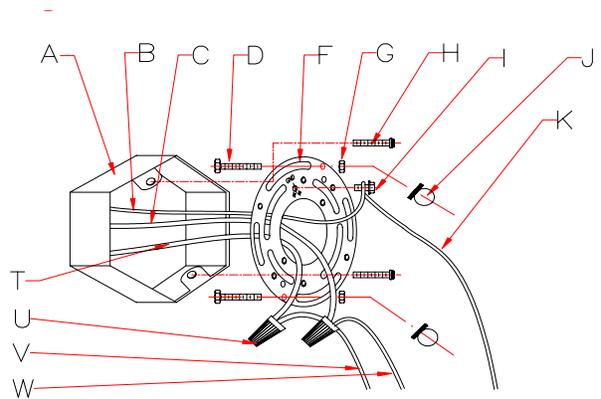


Fig. 2

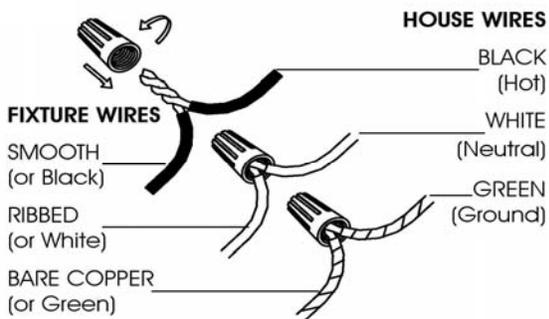


Fig. 3

