


SINE®

SINGLE LIGHT INSTALLATION INSTRUCTIONS

Complement your purchase with other fine accessories from GINGER®.

MODEL No. 0281

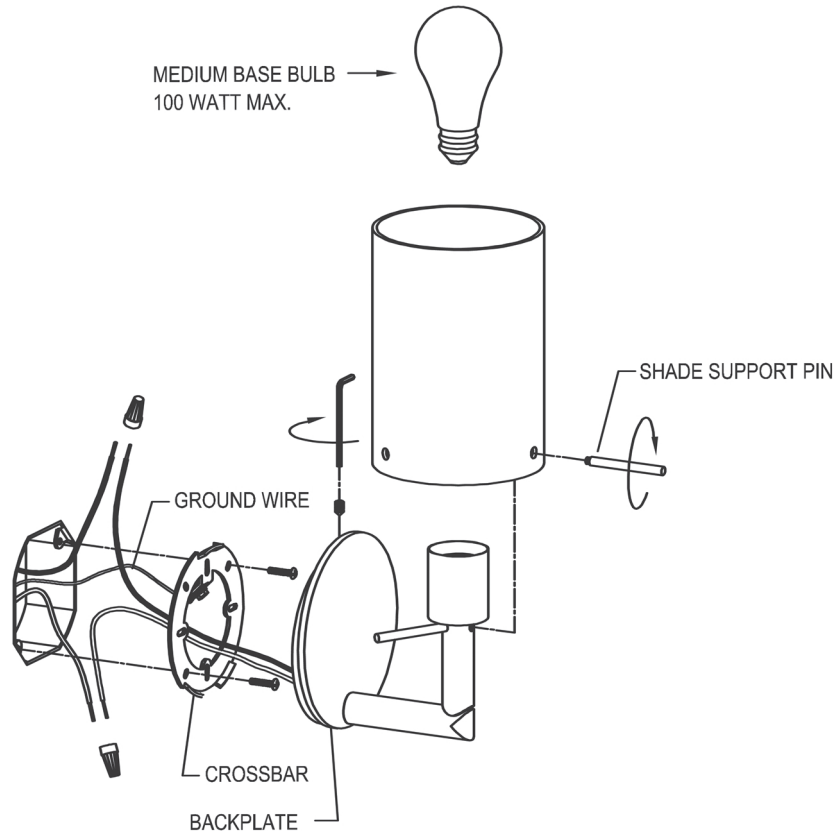

INSTALLATION:

1. PROVIDE THE REQUIRED WIRING TO THE WALL ELECTRICAL BOX. THE ELECTRICAL BOX SHOULD BE FLUSH TO THE WALL.
2. MOUNT CROSSBAR TO THE ELECTRICAL BOX. THE CROSSBAR SHOULD BE FLAT AGAINST THE WALL, POSITIONED AS SHOWN.
3. CONNECT HOUSE GROUND WIRE TO THE CROSSBAR WITH ATTACHED GROUNDING SCREW.
4. CONNECT THE WHITE WIRE OF THE FIXTURE TO THE HOUSE NEUTRAL WIRE WITH A WIRENUT.
5. CONNECT THE BLACK WIRE OF THE FIXTURE TO THE HOUSE HOT WIRE WITH A WIRENUT.
6. SLIDE THE FIXTURE OVER THE MOUNTING TABS OF THE CROSSBAR UNTIL IT IS FLUSH AGAINST THE WALL. SECURE THE FIXTURE BY TIGHTENING THE SET SCREW ON THE BACKPLATE WITH PROVIDED WRENCH. TAKE CARE WIRES ARE NOT PINCHED DURING THIS PROCESS.
7. POSITION GLASS SHADE ONTO THE (2) REAR SHADE SUPPORT PINS. SLIDE THE FRONT SHADE SUPPORT PIN THROUGH THE SHADE AND TIGHTEN INTO THE FIXTURE BODY.
8. INSTALL LIGHT BULB.

CARE OF FINE BRASS

To clean, use warm water only.
NEVER use abrasives or detergents.

INSTALLATION INSTRUCTIONS:

THESE LIGHTS SHOULD BE INSTALLED BY A LICENSED CONTRACTOR

POWER REQUIREMENTS: 120 VOLTS, 60 CYCLES

SAFETY: TO PREVENT ELECTRICAL SHOCK, BE SURE THAT THE POWER IS OFF BEFORE STARTING INSTALLATION.

GINGER
Luxury For Your Lifestyle™

2001 CARNEGIE AVENUE
SANTA ANA, CA 92705
949-417-5207
www.gingerco.com