

Complement
your purchase
with these
fine accessories
also from
GINGER®:

- Towel Bars
- Towel Rings
- Toilet Tissue Holders
- Hooks
- Soap Dishes
- Tumbler Holders
- Toiletty Shelves
- Grab Bars
- Mirrors
- Lights
- Bud Vases
- Hotel Shelves
- Shower Curtain Rods
- Soap & Bottle Baskets
- Cabinet Hardware

Circe

INSTALLATION
INSTRUCTIONS

for
Light
#2781


GINGER®
460-N Greenway Industrial Drive
Fort Mill SC 29708
gingerco.com

GINGER®

Circe[®] By GINGER[®] INSTALLATION INSTRUCTIONS

Circe Light

MODEL No. 2781

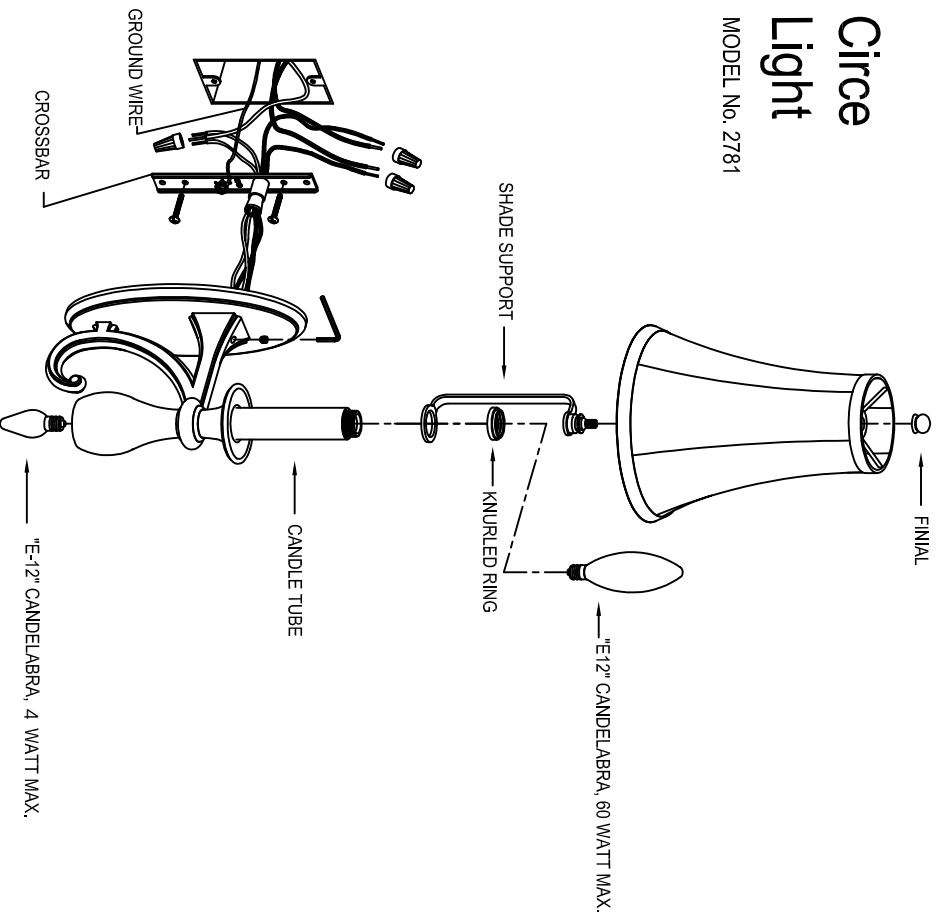

- NOTES TO INSTALLER:
- A. THE BACK PLATE OF THIS FIXTURE WILL COVER A WALL OPENING WITH A MAXIMUM WIDTH OF 2 1/2". IT IS RECOMMENDED THAT THIS FIXTURE BE MOUNTED ON A STANDARD OUTLET BOX.

INSTALLATION:

1. PROVIDE THE REQUIRED WIRING TO THE WALL ELECTRICAL BOX. THE ELECTRICAL BOX SHOULD NOT PROTRUDE FROM THE WALL.
2. MOUNT CROSSBAR TO THE ELECTRICAL BOX. THE CROSSBAR SHOULD BE FLAT AGAINST THE WALL WITH THE SPINDLE FACING AWAY FROM THE WALL.
3. CONNECT HOUSE GROUND WIRE TO THE CROSSBAR WITH ATTACHED GROUNDING SCREW.
4. FEED THE FIXTURE WIRES THROUGH THE CENTER HOLE OF THE CROSSBAR.
5. CONNECT THE WHITE WIRES OF THE FIXTURE TO THE HOUSE NEUTRAL WIRE WITH A WIRENUT.
6. A. FOR SINGLE SWITCH:
CONNECT THE RED AND BLACK WIRE OF THE FIXTURE TO THE HOUSE HOT WIRE WITH A WIRENUT.
B. FOR DOUBLE SWITCH:
CONNECT THE BLACK WIRE OF THE FIXTURE TO THE HOUSE HOT WIRE FOR THE MAIN LIGHT. CONNECT THE RED WIRE OF THE FIXTURE TO THE HOUSE HOT WIRE FOR THE NIGHT LIGHT.
7. SLIDE THE FIXTURE OVER THE SPINDLE OF THE CROSSBAR UNTIL IT IS FLUSH AGAINST THE WALL. SECURE THE FIXTURE BY TIGHTENING THE SET SCREW WITH THE PROVIDED WRENCH. TAKE CARE WIRES ARE NOT PINCHED DURING THIS PROCESS.
8. REMOVE KNURLED RING FROM TOP OF CANDLE TUBE. INSTALL SHADE SUPPORT AND REPLACE KNURLED RING.
9. INSTALL TOP BULB. POSITION SHADE ONTO FIXTURE AND SECURE WITH FINIAL.
10. INSTALL NIGHT LIGHT BULB.

INSTALLATION INSTRUCTIONS:

THESE LIGHTS SHOULD BE INSTALLED BY A LICENSED CONTRACTOR

WIRING REQUIREMENTS: THIS DEVICE CAN BE OPERATED WITH EITHER SINGLE OR DOUBLE SWITCHES. THE DOUBLE SWITCH WOULD BE USED TO ENABLE OPERATION OF THE LIGHT AND BOTTOM LIGHT SEPARATELY.

SAFETY: TO PREVENT ELECTRICAL SHOCK, BE SURE THAT THE

POWER IS OFF BEFORE STARTING INSTALLATION.

GINGER[®]