


SHOWER  
Exposed Thermostatic Shower  
System (Rough & Trim)  
**CD1.02**

---

**GRAFF®**

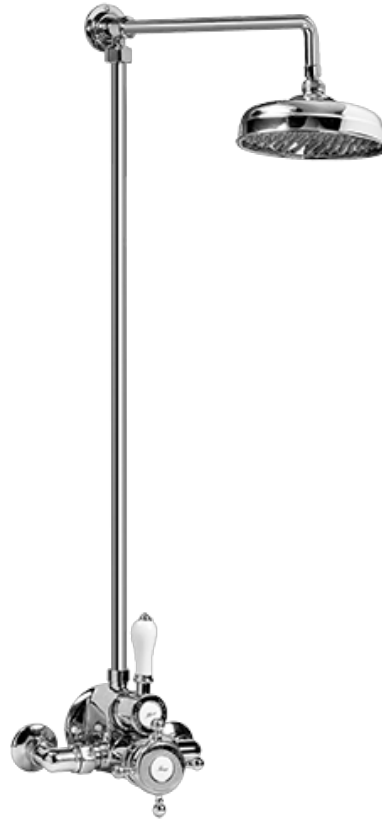

**Information**

- Showerhead, 20" Shower Arm, Flange
- Flow rates: showerhead  $\leq 1.8$  max gpm
- ADA
- CALGreen

SHOWER  
Traditional 8" Showerhead  
**G-8410**

**GRAFF®**



### Information

- Sunflower shape
- 112 no-clog, easy-clean rubber spray nozzles
- Metal ball-joint allows for showerhead angle adjustment
- Showerhead flow rate  $\leq 1.8$  max gpm
- Recommend use with ceiling shower arm
- Recommended for use at no more than 10 degrees tilt
- CALGreen

### Finishes



Olive Bronze



Polished  
Chrome




Polished  
Nickel



Steelnox®  
(Satin Nickel)

# G-8410

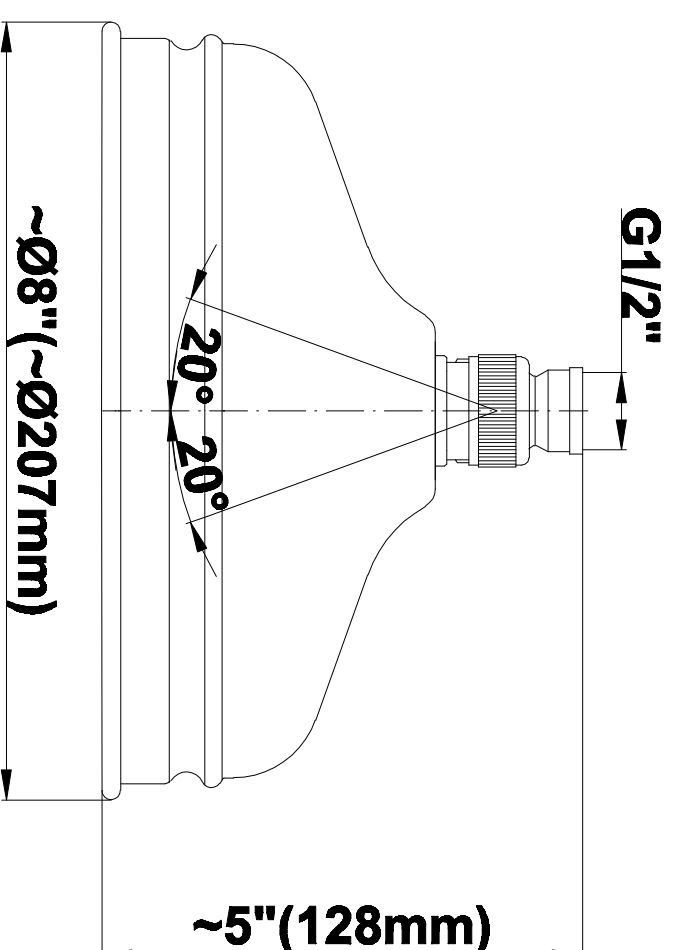

SHOWER  
Exposed Thermostatic Valve  
**G-8900**

---

**GRAFF®**



**Finishes**



Olive Bronze



Polished  
Chrome





Polished  
Nickel



Steelnox®  
(Satin Nickel)

# G-8900


## Exposed Thermostatic Valve

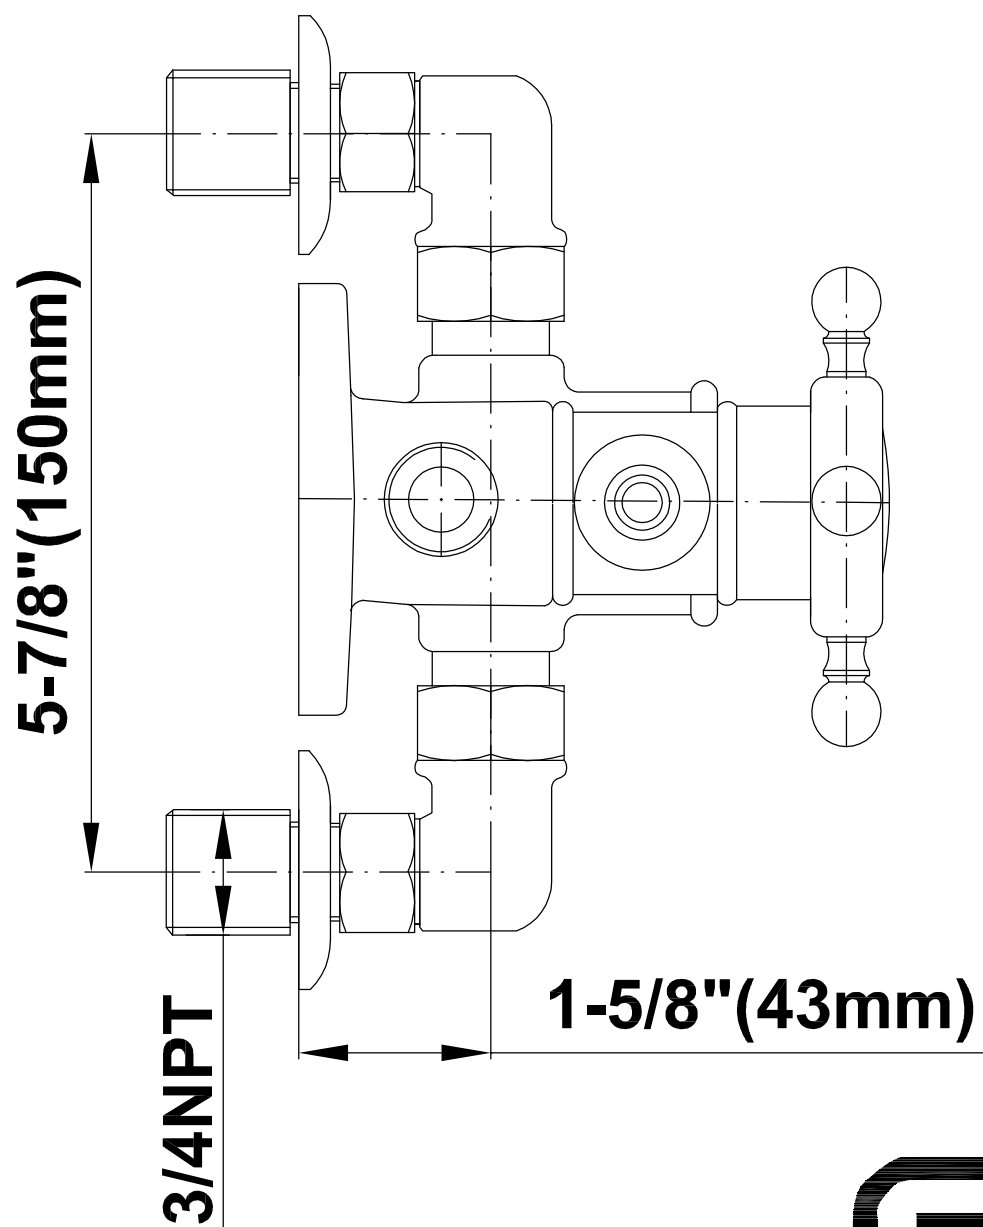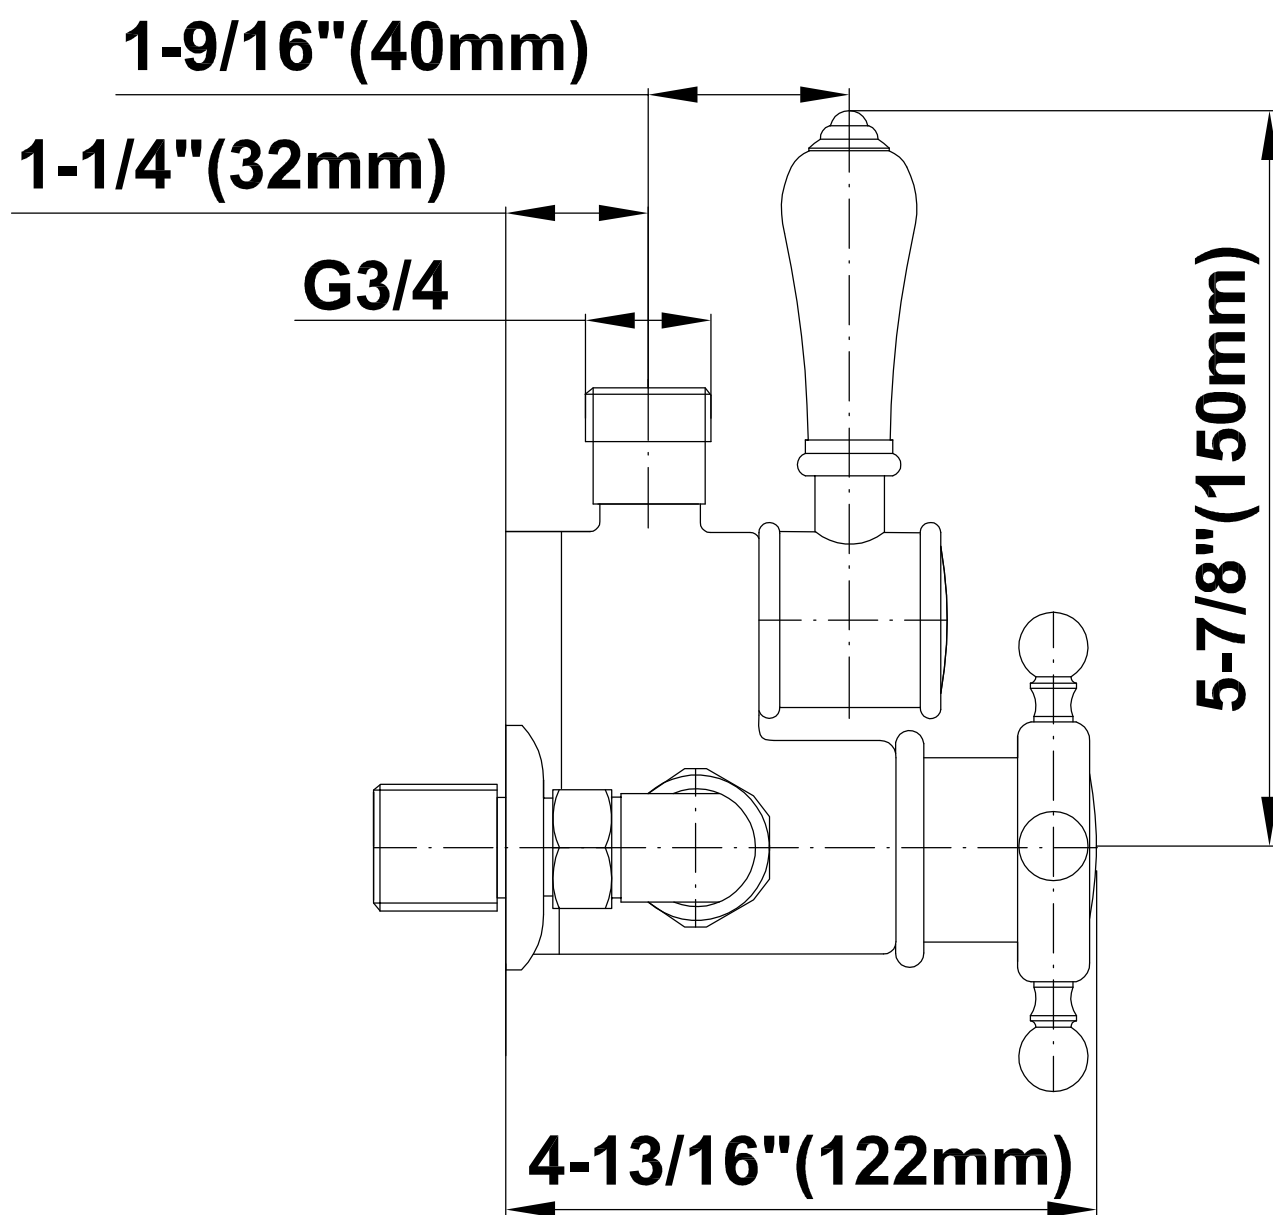

SHOWER  
Exposed Riser  
**G-8933**

**GRAFF®**

---

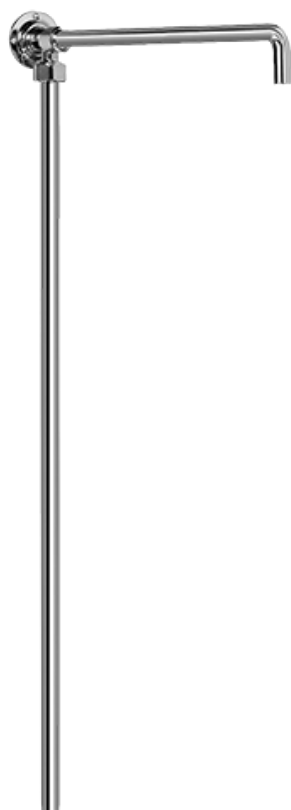

**Finishes**



Olive Bronze



Polished  
Chrome



Polished  
Nickel



Steelnox®  
(Satin Nickel)

# G-8933

## Exposed Riser

