



ESSENTIAL TABLE BASE

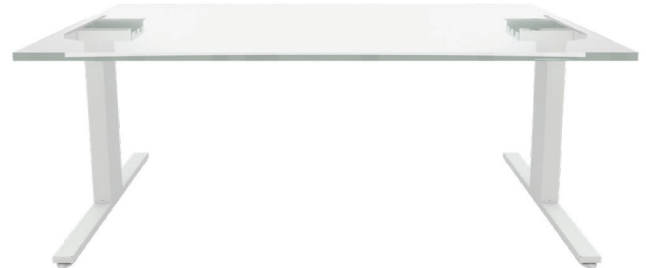

FEATURES

- ✔ Full table base (add your own work surface)
- ✔ Meets BIFMA X5.5 standards
- ✔ UL 962 approved
- ✔ Easy-order with one part number
- ✔ Lift capacity up to 250 lb.

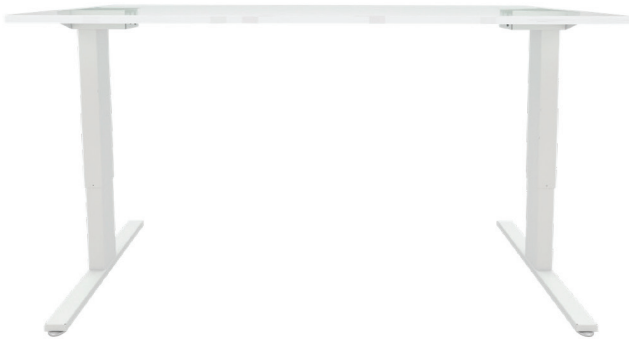

ADDITIONAL INFORMATION

- Single stage height range 26"–45" (without top)
- Fits both 24" and 30" tops
- Standard base widths 48"–72" (anti-sag bar recommended for widths over 60")
- Raise/lower speed of 1.375" per second
- Power consumption <math><0.3W</math>
- Welded foot design (no assembly to foot required)
- Minimal assembly required
- Available in black, white or silver

OPTIONS

HANDSWITCH OPTIONS




Basic Up-Down



Programmable


POWDER COAT COLOR OPTIONS



Black



White



Metallic Silver

FOOT OPTIONS




T Foot

TECHNICAL SPECIFICATIONS

TYPE	STROKE LENGTH (IN)	HEIGHT MIN / MAX (IN)	TRAVEL SPEED (IN/sec)	MAX RATED WEIGHT (LB)	NOISE LEVEL (DB)
Single Stage	19	26 / 45	1.375	250	<50

DRAWING

Standard Dimensions

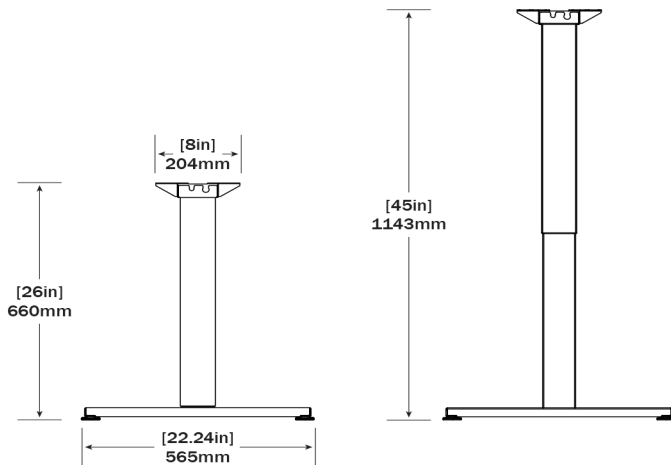

NOTES

- Base depth: 22.24"
- Base width: 48"–72"
- Base height: Single Stage Electric: 26"–45"
- Column dimensions: 3.35" x 2.17"
- Stroke length of 19" (482mm)
- Recommended column orientation as shown. Do not mount on angle.
- Maximum load (including table top) not to exceed 250 lb.
- Anti-sag bar available for widths over 60"

HÄFELE

3901 Cheyenne Drive • P.O. Box 4000 • Archdale, NC 27263
1-800-423-3531 • www.hafele.com/us