

HMT6236TR COL (HS)

with Seat


CUSTOMER: JOB NAME: PO #: QUOTE # DATE: QUANTITY: L R GENERAL CONTRACTOR APPROVAL ENGINEER APPROVAL ARCHITECT APPROVAL To complete your order, this document must be signed and emailed to the Centralized Customer Service Center. quotes@americanbathgroup.com • 800.443.7269 STANDARD FEATURES Pre-leveled base AcrylX TM applied acrylic surface Ng Skirt Ht. Skirt Ht. Packaged Wt. 210 lbs.	
PLUMBING CONTRACTOR APPROVAL DATE: QUANTITY: L R GENERAL CONTRACTOR APPROVAL DATE: SHIP TO: ENGINEER APPROVAL ARCHITECT APPROVAL To complete your order, this document must be signed and emailed to the Centralized Customer Service Center. quotes@americanbathgroup.com • 800.443.7269 STANDARD FEATURES Pre-leveled base Acry XTM applied acrylic surface V2" skirt Packaged Wt. 210 lbs.	e Required
DATE: QUANTITY: L R GENERAL CONTRACTOR APPROVAL DATE SHIP TO: ENGINEER APPROVAL DATE To complete your order, this document must be signed and emailed to the Centralized Customer Service Center. quotes@americanbathgroup.com • 800.443.7269 STANDARD FEATURES Pre-leveled base AcrylXTM applied acrylic surface V2" skirt Ht. V2 skirt, V2 COL exterior threshold Packaged Wt. 210 lbs.	_/
SHIP TO: ENGINEER APPROVAL ARCHITECT APPROVAL To complete your order, this document must be signed and emailed to the Centralized Customer Service Center. quotes@americanbathgroup.com • 800.443.7269 STANDARD FEATURES Pre-leveled base AcrylX TM applied acrylic surface Y2" skirt Packaged Wt. 210 lbs.	_/
To complete your order, this document must be signed and emailed to the Centralized Customer Service Center. quotes@americanbathgroup.com • 800.443.7269 STANDARD FEATURES - Pre-leveled base - AcrylX TM applied acrylic surface - ½" skirt ARCHITECT APPROVAL DATI Dim. 60 W x 34 D x 88 ¾ H Ext. Dim. 66 W x 36 ½ D x 91 H Skirt Ht. ½ skirt, ½ COL exterior threshold Packaged Wt. 210 lbs.	
To complete your order, this document must be signed and emailed to the Centralized Customer Service Center. quotes@americanbathgroup.com • 800.443.7269 STANDARD FEATURES - Pre-leveled base - AcrylX TM applied acrylic surface - ½" skirt To complete your order, this document must be signed and emailed to the Centralized Customer Service Center. Quotes@americanbathgroup.com • 800.443.7269 Int. Dim. 60 W x 34 D x 88 ¾ H Ext. Dim. 66 W x 36 ⅓ D x 91 H Skirt Ht. ½ skirt, ½ COL exterior threshold Packaged Wt. 210 lbs.	Ē/
TANDARD FEATURES - Pre-leveled base - AcrylX™ applied acrylic surface - ½" skirt - V2" skirt - Quotes@americanbathgroup.com • 800.443.7269 Int. Dim. 60 W x 34 D x 88 ¾ H Ext. Dim. 66 W x 36 ⅓ D x 91 H Skirt Ht. ½ skirt, ½ COL exterior threshold Packaged Wt. 210 lbs.	Ē/
- Pre-leveled base - AcrylX TM applied acrylic surface - ½" skirt - Pre-leveled base - V2" skirt - Pre-leveled base - V2 skirt, ½ COL exterior threshold - V2 skirt, ½ COL exterior threshold	
- Pre-leveled base - AcrylX TM applied acrylic surface - ½" skirt - Pre-leveled base - V2" skirt - Pre-leveled base - V2 skirt, ½ COL exterior threshold - V2 skirt, ½ COL exterior threshold	
- ½" skirt Packaged Wt. 210 lbs.	
 - ½" COL exterior threshold Material AcrylX™ applied acrylic 	
 - ½" COL exterior threshold - Compliant when properly installed Material AcrylX™ applied acrylic Warranty 30-year warranty* 	
- Center front drain outlet * See terms and conditions for details	inches
- Integral front trench drain	
- 5-year limited warranty - 12" x 24" subway tile Stainless steel vertical bar 24" x 1½" (entry wall)	
- Slip resistant textured bottom [ASTM F-462] □ LH □ RH □ Both	
□ Large soap dish (12½ W x 3½ D x 11½ H), shipped loose □ Small soap dish (7 W x 3½ D x 11½ H), shipped loose)
CONFIGURATION (handed by the seat) Configuration (handed by the seat)	
☐ Shell reinforced for future accessory installation ☐ Shower curtain, shipped loose	
Seat Wall LH RH Brass drain	
□ Optional vertical bar reinforcement (entry wall) Colors: □ LH □ RH □ Both Standard □ White	
☐ LH ☐ RH ☐ Both Standard ☐ White ☐ Fully configured — ADA/ANSI Upgraded ☐ Biscuit ☐ Bone	
Seat Wall (must choose one))
Includes one stainless steel 24" x 11/2" grab bar located on the	
side wall, one stainless steel 30" x 1½" grab bar located on the	
back wall, stainless steel grate and cushioned, white, L-shaped fold-up seat, per ADA/ANSI guidelines. (std config)	
☐ Factory-installed plumbing options per ADA requirements	
☐ Hand-held shower assembly, 30" slide bar and 60" hose	
☐ Pressure balancing mixing valve	
CUSTOM OPTIONS (not avail. if ADA/ANSI configuration is selected)	
Handed by the seat LH RH Reinforced for future seat installation	
□ I-shaped fold-up seat	
☐ Cushioned white ☐ Phenolic teak ☐ Phenolic white	
Grab bars:	
 Horizontal L-shaped bars: 24" (side wall) and 30" (back wall) Vertical bar 24" (entry wall) LH RH Both 	
Grab Bar finish:	
☐ Stainless steel (1½" dia.)	
Powder-coated white (11/4" dia.)	
☐ Factory-installed plumbing options per ADA requirements ☐ Hand-held shower assembly, 30" slide bar and 60" hose	
Pressure balancing mixing valve	
Grate:	
□ Stainless steel	
□ White □ Tamper-proof	



by Hamilton Bathware

with Seat

ADA/ANSI compliant when fully equipped and installed according to guidelines.

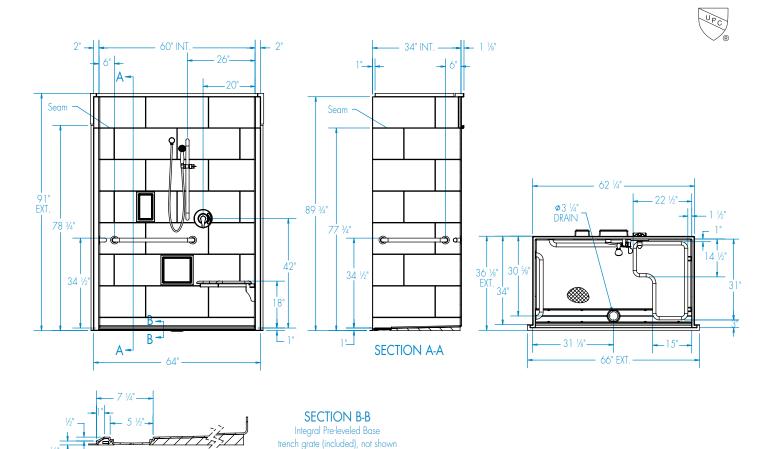

FEATURES Ibs Dimensional Tolerance ± %". Dimensions needed for site preparation should be measured from the unit. Manufacturer assumes no responsibility for preparatory work.


Type and Model #	Material	Wall Finish	Pieces	Drain	Dam/Skirt Height	Net Wt.	Pkg. Wt.
Shower HMT6236TR COL (HS)	AcrylX™ applied acrylic	Smooth tile	4	Center Front	$\frac{\mathcal{V}_{2}''}{2}$ skirt \mathcal{V}_{2}'' exterior COL threshold	200	210

DIMENSIONS

Specifications	inches (mm)
Width: Ext. / Int.	66 / 60
Depth: Ext. / Int.	36 1/8 / 34
Height: Ext. / Int.	91 / 88 3/4
Enclosure Opening:	60
Skirt Height:	1/2
Drain Rough-In (from Back Wall)	30 %
Drain Rough-In (from Side Wall)	31 1/8


FRAMING DIMENSIONS inches (mm)


Туре	D Depth	W Width	H Height	Α	В	С
Alcove	34	62 1/4	_	Box Out	31 1/8	30 %




with Seat

High Style Attachment



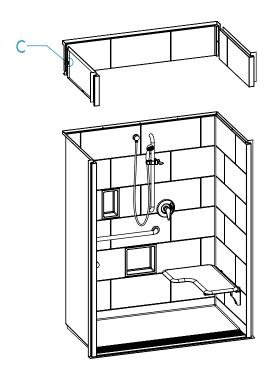



by Hamilton Bathware

with Sea

Curtain Rod and Soap Dish Locations (Standard Valve Configuration)

