
LUXURY ACRYLIC SERIES

SUBMITTAL DATA

SIDE VIEW

-35¾"

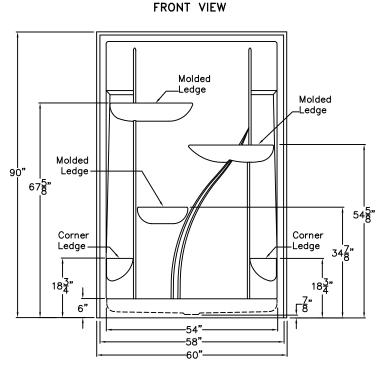


Acrylic Shower

This shower enclosure shall be model A6090 SH NS. Finished surface shall be of a sanitary grade thermoformed acrylic exhibiting a minimal thickness of 15 dry mils and a finished cured Barcoal hardness of 80-90 as tested with ASTM D-2583. Unit construction shall be of a molded reinforced fiberglass with a 15% minimum fiberglass content. The base shall be attached to the sump of the unit in such a manner to form an integral part with and inner and outer coating of reinforced polyester resin.

The unit shall have outside dimensions of 60" \times 35 3/4" \times 90". The one piece shower shall meet ANSI Z124.1, ANSI Z124.1.2 and FHA/HUD-UM-73A.

The enclosure shall be equipped with the following accessories:

- I. Acrylic Finish,
- Center Drain Location,
- 3. Integral Top Dome,
- 4. Recessed Receiver Flanges On Sides And Across The Top,
- 5. Molded Corner Soap Ledge,
- 6. Molded Ledges On The Back Wall,
- 7. 6" Threshold,
- 8. Slip Resistant Bottom.

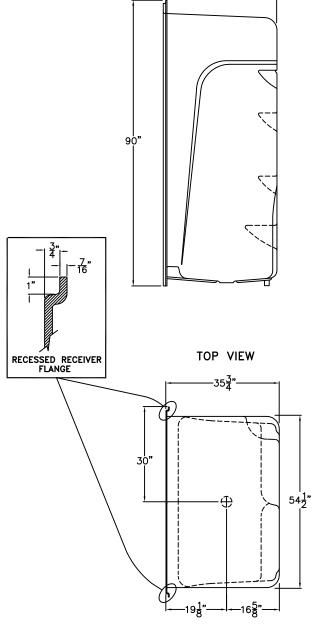

DUE TO THE NATURE OF THE MATERIALS DIMENSIONS MAY VARY ± 1/2"

Job Name:		PRAXIS	
Approved By Print Name:		Drawing#: A6090	SH NS
Approved By Signature:	Date Approved:	Date: 1-16-14	Revised: 6-22-16
Rep.:	Wholesaler:	Quote No.:	
DRAVIS INDUSTRIES 11.0			

PRAXIS INDUSTRIES, LLC. 435 INDUSTRIAL ROAD, SAVANNAH, TN 38372 1 (800) 443-7269 - FAX (731) 925-4290