

## HCC Holdings, Inc.

4700 West 160th  
Cleveland, Ohio 44135


Phone: 800-321-9532  
Website: [www.Oatey.com](http://www.Oatey.com)



## 300 DEGREE PLUMBER'S GREASE Valve Stem Grease

Date: August 2017

Hercules unique formula petroleum based grease lubricates and prevents corrosion on valve stems, faucets, ballcock linkage, and other places where a water resistant grease is needed. Smooths and eases hard turning faucets. Use on sump and sewage ejector pump linkage to prevent corrosion and sticking. Assures free movement and extended life. Will not melt like ordinary greases. For use on steam and hot/cold water systems. Withstands -20°F to +300°F. Non-hazardous and non-toxic. Waterproof; will not dissolve into stream, resists wash out even in severe water flow or water wash situations. Safe for use with potable water.

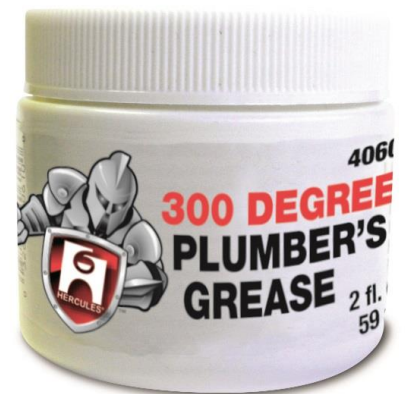

## APPROVALS & LISTINGS

Not Applicable.

## SPECIFIC USES

Use **300 Degree Plumber's Grease** to lubricate valve stems, faucets and ballcocks.

## SPECIFIC APPLICATIONS\*

**300 Degree Plumber's Grease** can be used as a lubricant on sliding or rotating metal parts in steam and hot/cold water systems.

\*For special applications which may not be covered on this or other Oatey literature, please contact Oatey Technical Services Department by phone 1-800-321-9532, or fax 1-800-321-9535, or visit our technical database web-site at [www.Oatey.com](http://www.Oatey.com).

## WARNINGS OR CAUTIONS

---

- Read all cautions and directions carefully before using this product.
- **KEEP OUT OF REACH OF CHILDREN.**
- If Plumbers Grease is dropped on floor wipe up to prevent slippery footing.

## DIRECTIONS FOR USE

---

**Valve Bodies:** Unscrew valve bonnet nut. Rotate valve stem counter clockwise to remove from valve body. Clean stem and threads if necessary. Apply a liberal amount of **300 Degree Plumbers Grease** to the stem and stem threads. Reassemble in reverse order. Tighten bonnet nut lightly. Retighten if necessary to prevent seepage when system pressure is restored.

**Ballcock and Float Linkages:** Clean and descale first if necessary. Apply liberally to all rubbing and pivoting surfaces. Apply a thin film to all metal parts in contact with water to prevent corrosion and scale build up. Apply to float linkage threads to prevent corrosion.

## PHYSICAL PROPERTIES

---

Appearance/color/odor: Smooth translucent amber grease. Odorless.

## MATERIAL SAFETY INFORMATION

---

**FOR MORE INFORMATION ON THIS PRODUCT, REQUEST SAFETY DATA SHEET (SDS) #7381E**

For Delivery By Fax	Call 1-800-321-9535
Internet	See SDS section of <a href="http://www.Oatey.com">www.Oatey.com</a>

**HMIS® ratings** Health: 0  
Flammability: 0  
Physical hazard: 0

## SIZE & PACKING

---

STOCK NUMBER	SIZE	PACKING	WEIGHT/CASE
40601	2 oz.	24	4.2 lbs.