ID Infinity Drain



FTED 65 Series


Side Outlet

- FTED 6524 24" Complete Kit
- FTED 6532 32" Complete Kit
- FTED 6536 36" Complete Kit
- FTED 6542 42" Complete Kit
- FTED 6548 48" Complete Kit
- FTED 6560 60" Complete Kit

Features

- Centered side outlet
- Indoor or outdoor use
- 16 gauge, 304L stainless steel grate and channel
- Pre pitched channel
- Grate can be removed for cleaning
- NOT Site Sizable ™

- Compatible with: liquid applied or fabric sheet membranes
- Flow rate 9 gpm per outlet
 - Flow rate measured at outlet only. Measurement does not account for water in channel or sheeting on shower floor.
 - Additional outlets can be added and combined into a larger waste line to increase flow rates

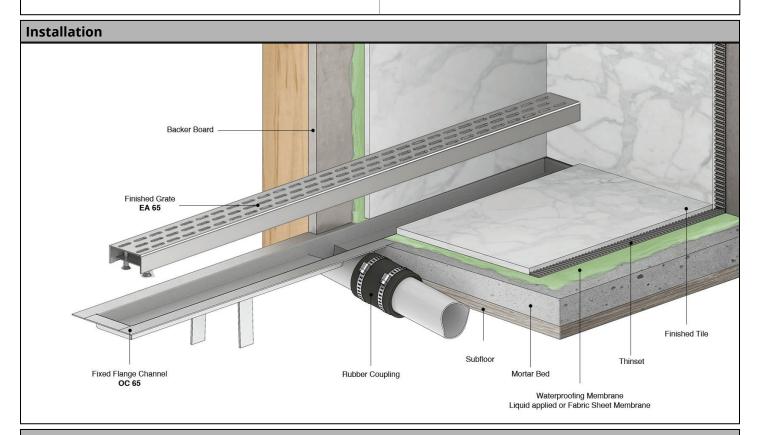


Care & Maintenance

FTED 65 stainless steel linear drain top grates are made of 304L stainless steel. This material is non-porous, hygienic, rust-free and extremely durable. Bar Keepers Friend® and Soft Scrub® are commonly available products that can be used to protect and clean your Satin Stainless drain cover. For stains that have been left for an excessive amount of time, stronger cleaning agents such as Steel Brite® may be needed. For Polished Stainless and other finishes we recommend a mild soap and a soft cloth for cleaning. DO NOT use any abrasive cleaners, scrub pads or allow household cleaning agents, such as bleach, to sit on the drain cover for a long period of time. Stainless steel does not rust. External factors, such as contamination from other highly ferrous metals, built up road salt, sea salt, or chlorine may have caused "surface" rust which can be removed using Barkeepers Friend®, Soft Scrub® with Bleach, or Steel Brite®. Always follow the directions on the bottle. Follow proper maintenance procedures to prevent excessive surface rust. In areas of frequent exposure to salt, chlorine, and other chemical compounds, maintenance of the stainless grates should be performed at least 2-3 times per year.

Infinity Drain

145 Dixon Avnue Amityville, NY 11701 Phone: 516.767.6786 Fax: 516.740.3066 www.Infinity Drain.com






CANADA - CSA B 125.2 USA - ASME A112.18.2




NOTE: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer.

ID Infinity Drain

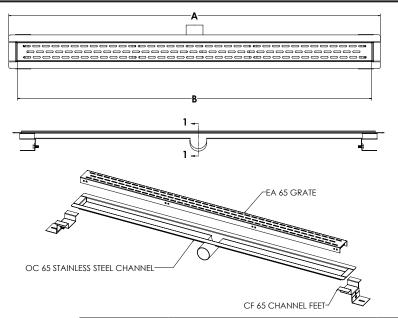

Grate can be adjusted upwards and additional 1/2"



SECTION 1-1

Model Number	Complete Kit Contents	A (Maximum Overall Length)	B (Maximum Grate Length)
FTED 6524	1 - EA 6524 Grate 1 - OC 6524 Fixed Fixed Flange Channel 2 - CF 65 Adjustable Channel Feet 1 - AKEY Lift Out Key	26 1/8"	23 7/8"
FTED 6532	1 - EA 6532 Grate 1 - OC 6532 Fixed Flange Channel 2 - CF 65 Adjustable Channel Feet 1 - AKEY Lift Out Key	34 1/8"	31 7/8"
FTED 6536	1 - EA 6536 Grate 1 - OC 6536 Fixed Flange Channel 2 - CF 65 Adjustable Channel Feet 1 - AKEY Lift Out Key	38 1/8″	35 7/8″
FTED 6542	1 - EA 6542 Grate 1 - OC 6542 Fixed Flange Channel 2 - CF 65 Adjustable Channel Feet 1 - AKEY Lift Out Key	44 1/8"	41 7/8"
FTED 6548	1 - EA 6548 Grate 1 - OC 6548 Fixed Flange Channel 2 - CF 65 Adjustable Channel Feet 1 - AKEY Lift Out Key	50 1/8″	47 7/8"
FTED 6560	1 - EA 6560 Grate 1 - OC 6560 Fixed Flange Channel 2 - CF 65 Adjustable Channel Feet 1 - AKEY Lift Out Key	62 1/8"	59 7/8"

Finishes		
□ Satin Stainless	□ Lifetime Oil Rubbed Bronze	□ Polished Stainless

Infinity Drain

145 Dixon Avnue Amityville, NY 11701 Phone: 516.767.6786 Fax: 516.740.3066 www.lnfinity Drain.com






CANADA - CSA B 125.2 USA - ASME A112.18.2



NOTE: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer.

ID Infinity Drain

□ FTED 65 CUSTOM

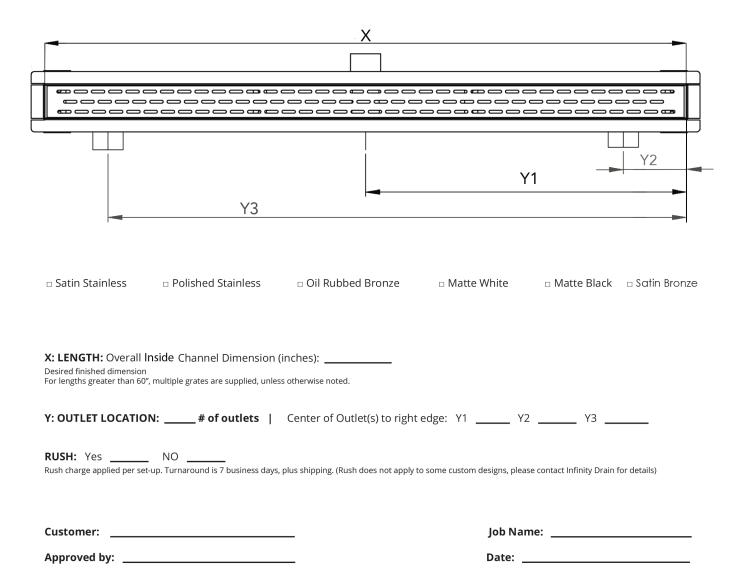

Infinity Drain 145 Dixon Avnue Amityville, NY 11701 Phone: 516.767.6786 Fax: 516.740.3066 www.lnfinity Drain.com





NOTE: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer.