
FLUSSO
LUXURY PLUMBING FIXTURES

# Installation Manual - 4000T


## [100, 145, 150, 160, 196, 240, 250, 270]

## Thermostatic Valve Trim & Handle Set


**Use With TVH.4101, TVH.4420F, TVH.4301F Valves**




[100.4000T]




[145.4000T]




[150.4000T]




[160.4000T]




[196.4000T]



[240.4000T]



[250.4000T]




[270.4000T]

**BEFORE YOU BEGIN**


- You must observe all local plumbing laws and codes.
- Do not install this valve if it does not meet local plumbing codes.
- Shut off the main water supply.

FLUSSO
LUXURY PLUMBING FIXTURES


## INSTALLING THE TRIM - TRIM PLATE SIZE AND SHAPE MAY VARY - ILLUSTRATION ONLY

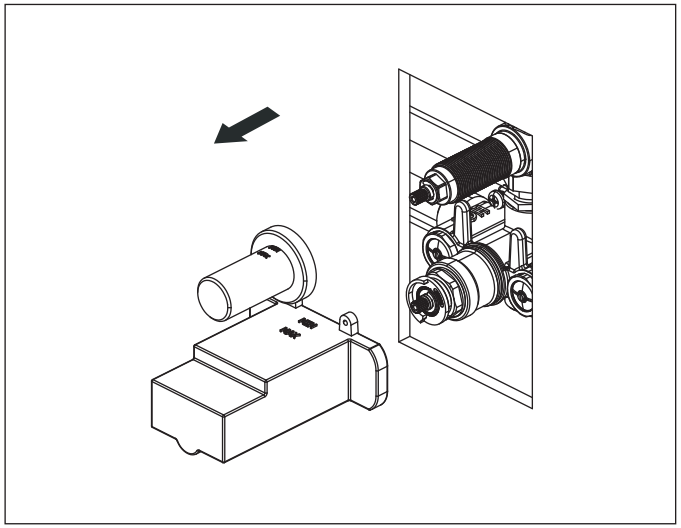


Remove mud guards

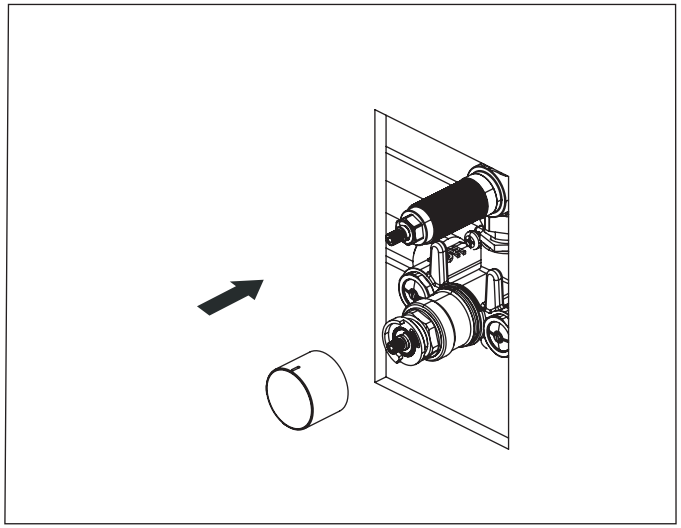

Install 42mm ring

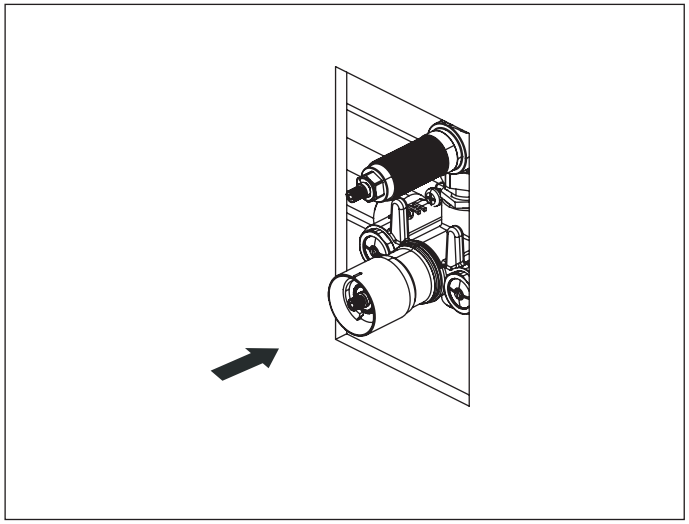


A hard push may be required

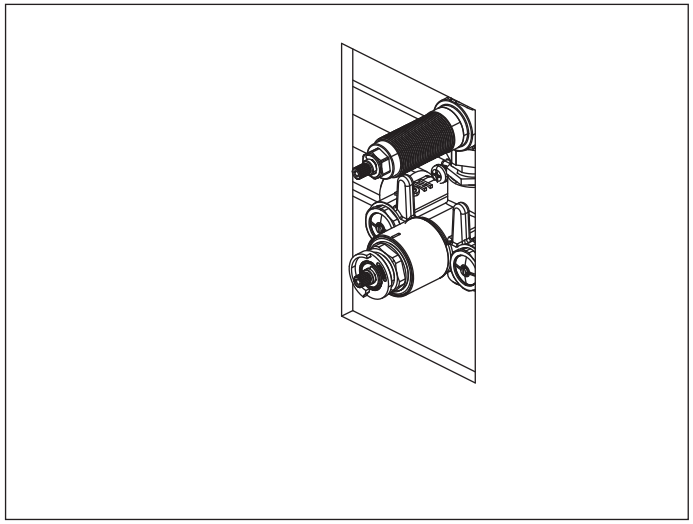


The 42mm ring must be fully flush to ensure the handle fits correctly.

## INSTALLING THE TRIM - TRIM PLATE SIZE AND SHAPE MAY VARY - ILLUSTRATION ONLY

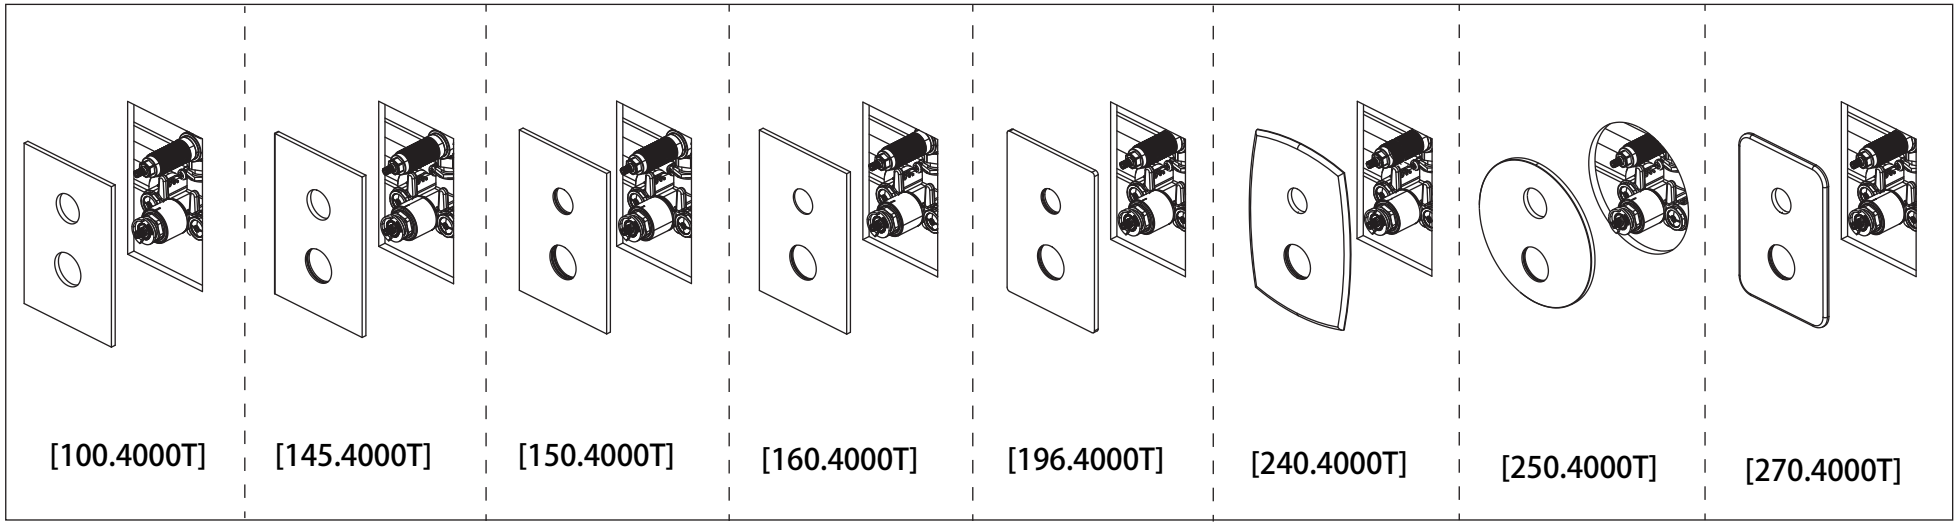



Insert trim plate

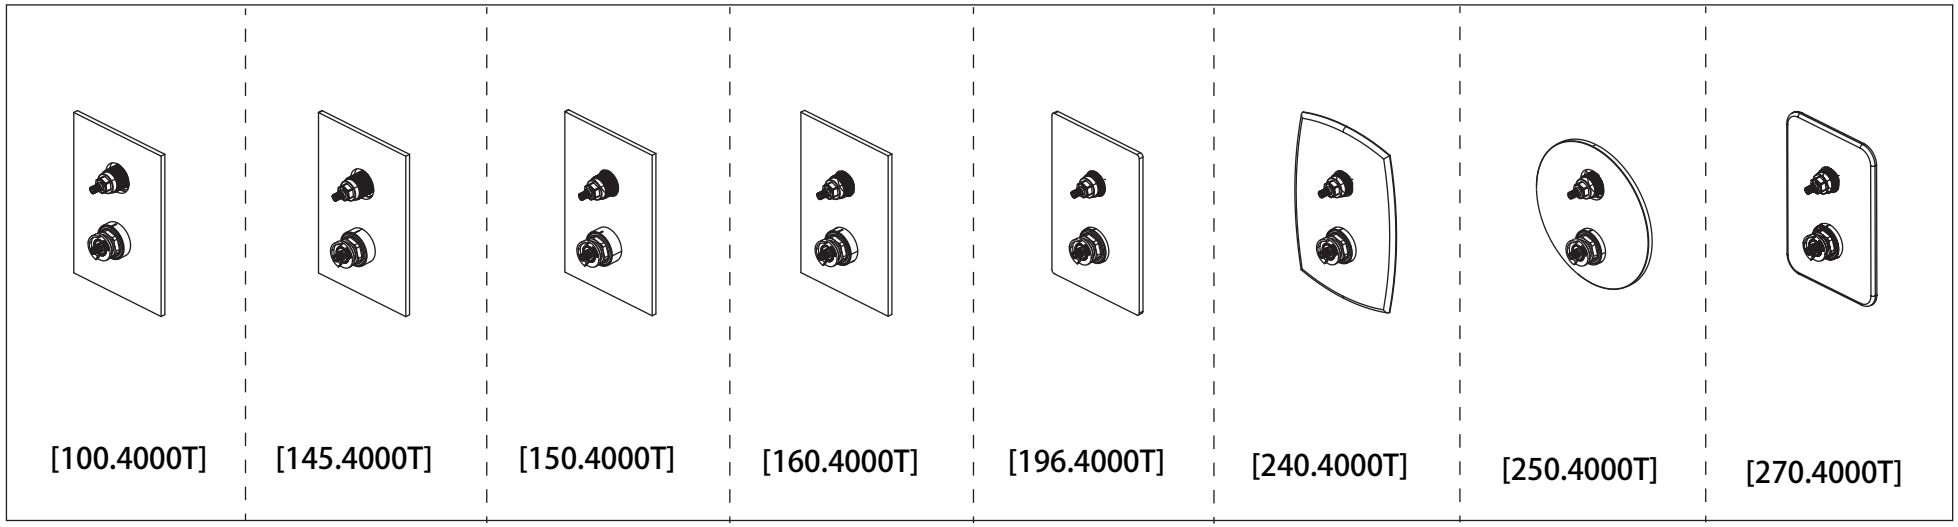



Align plate till it is straight

## INSTALLING THE TRIM - TRIM PLATE SIZE AND SHAPE MAY VARY - ILLUSTRATION ONLY

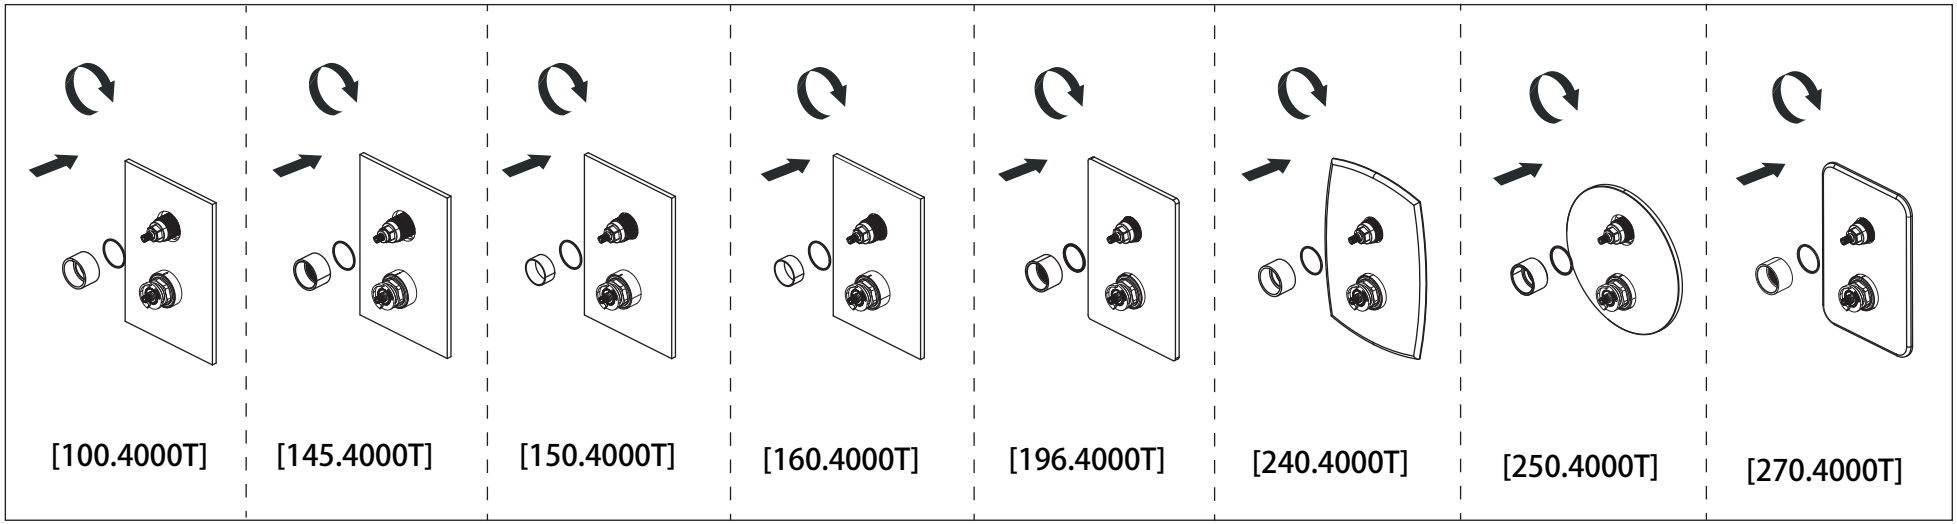



Insert adapter base and tighten

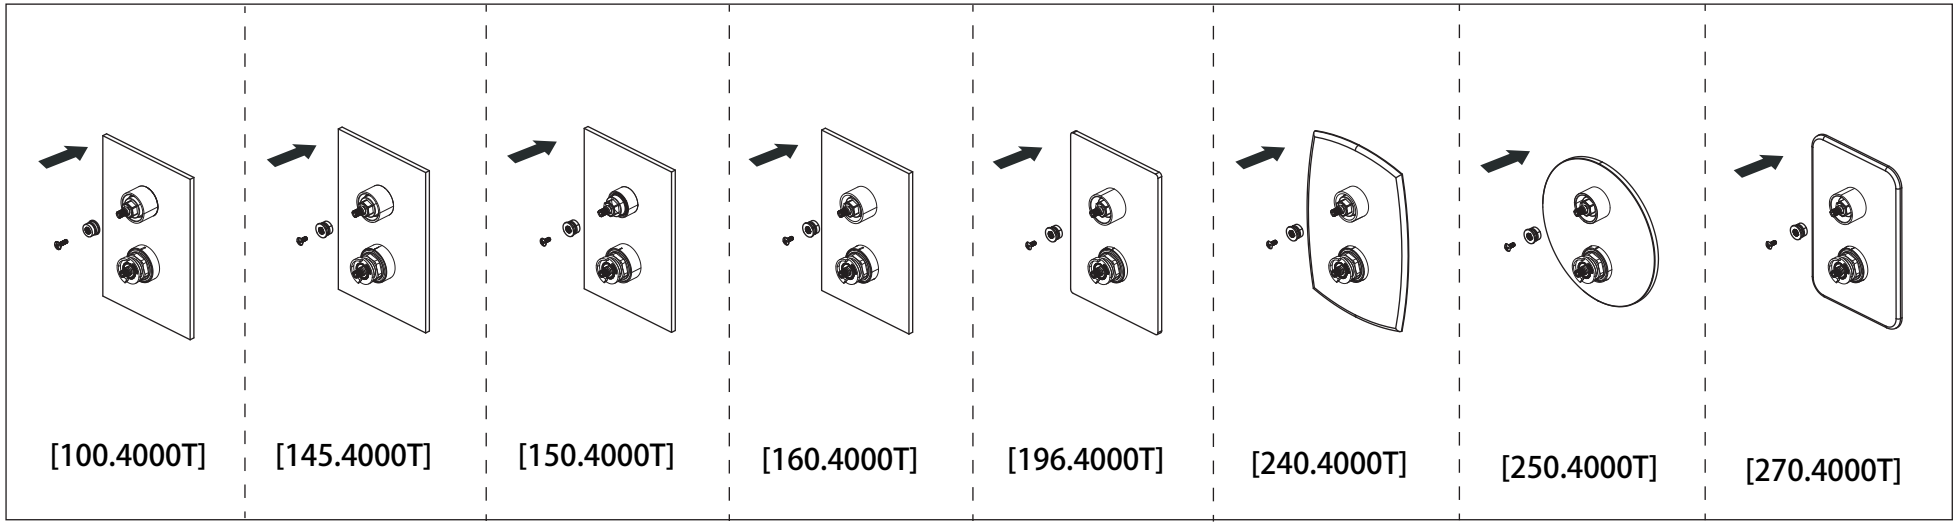



Insert centring knob & screws.

## INSTALLING THE TRIM - TRIM PLATE SIZE AND SHAPE MAY VARY - ILLUSTRATION ONLY

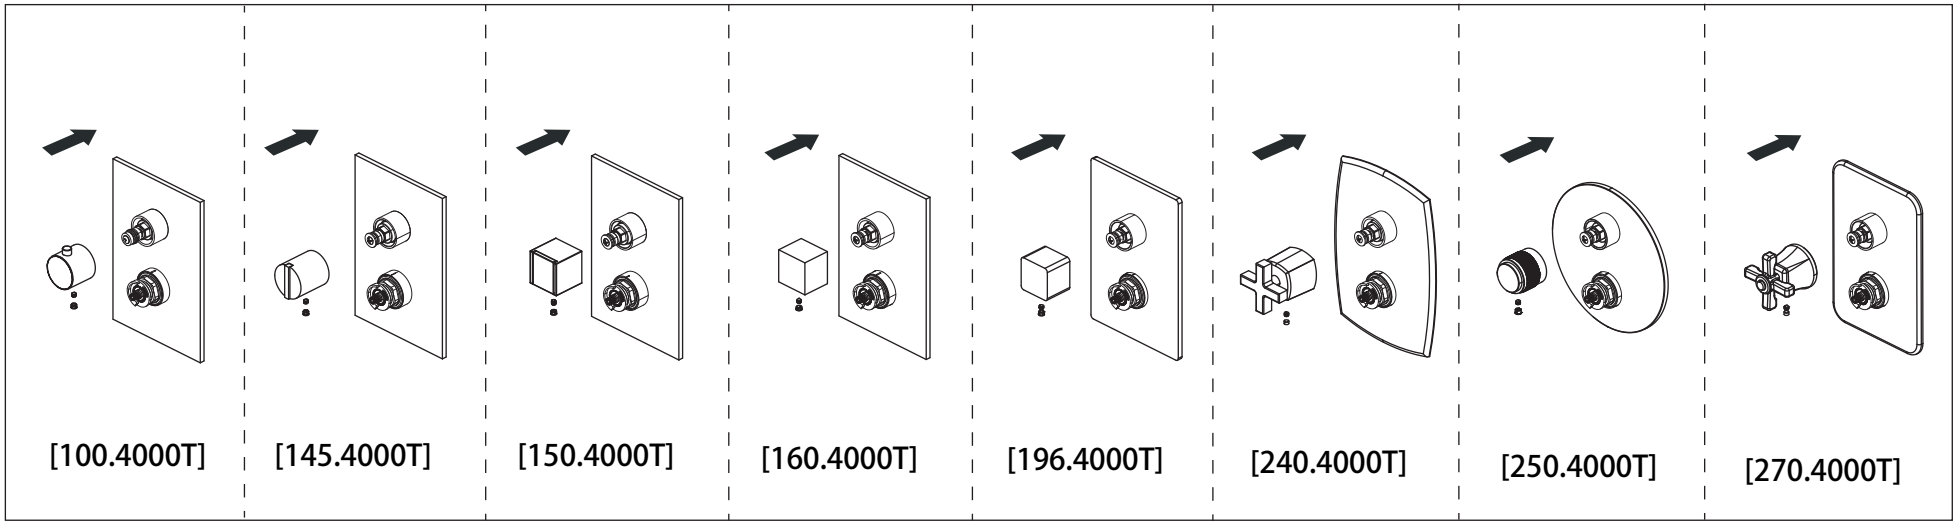



Attach the volume handle, secure it by tightening the hex screw, and insert the cover button.

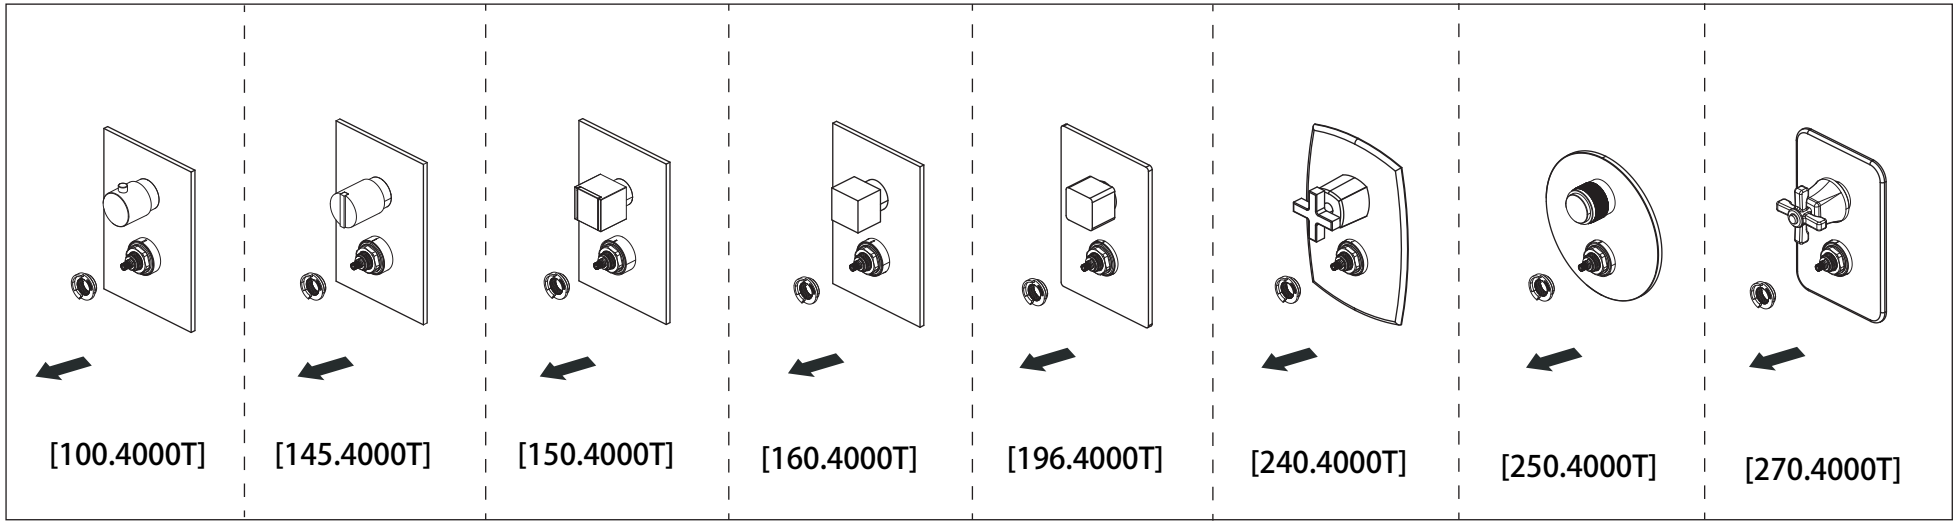



Remove the anti-scald temperature ring, adjust it to the correct position, and reinsert it as shown in the reference image.

## INSTALLING THE TRIM - TRIM PLATE SIZE AND SHAPE MAY VARY - ILLUSTRATION ONLY

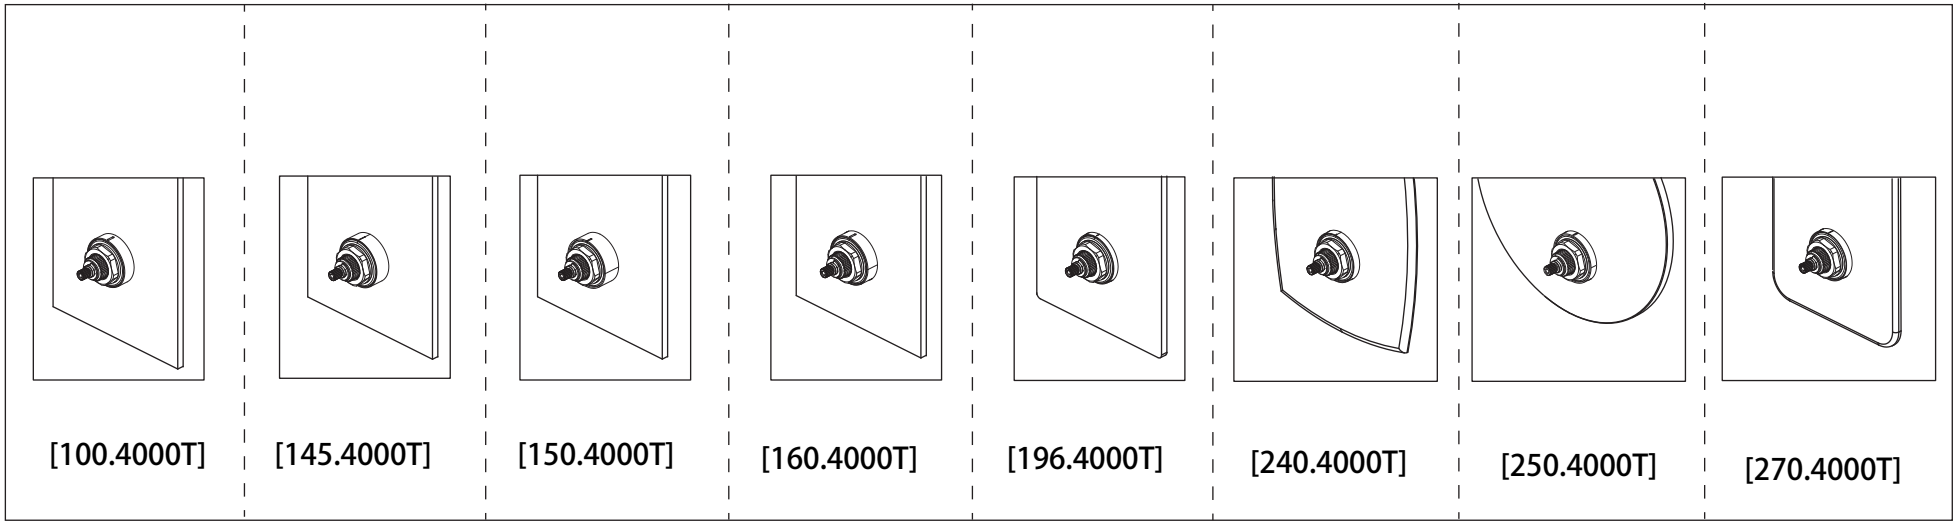



Calibrate the cartridge before attaching the temperature handle, ensuring the red marks are aligned.

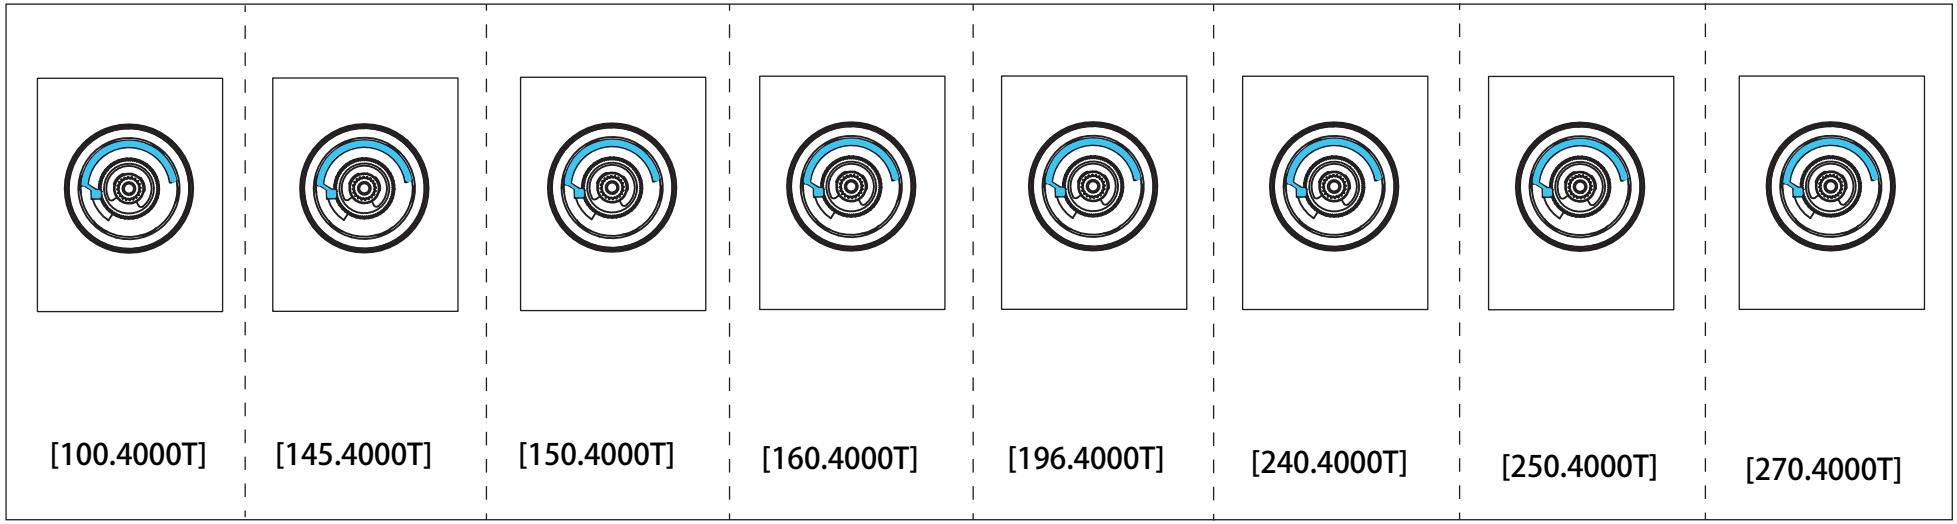



Reinsert the anti-scald temperature ring properly in the correct position.

## INSTALLING THE TRIM - TRIM PLATE SIZE AND SHAPE MAY VARY - ILLUSTRATION ONLY

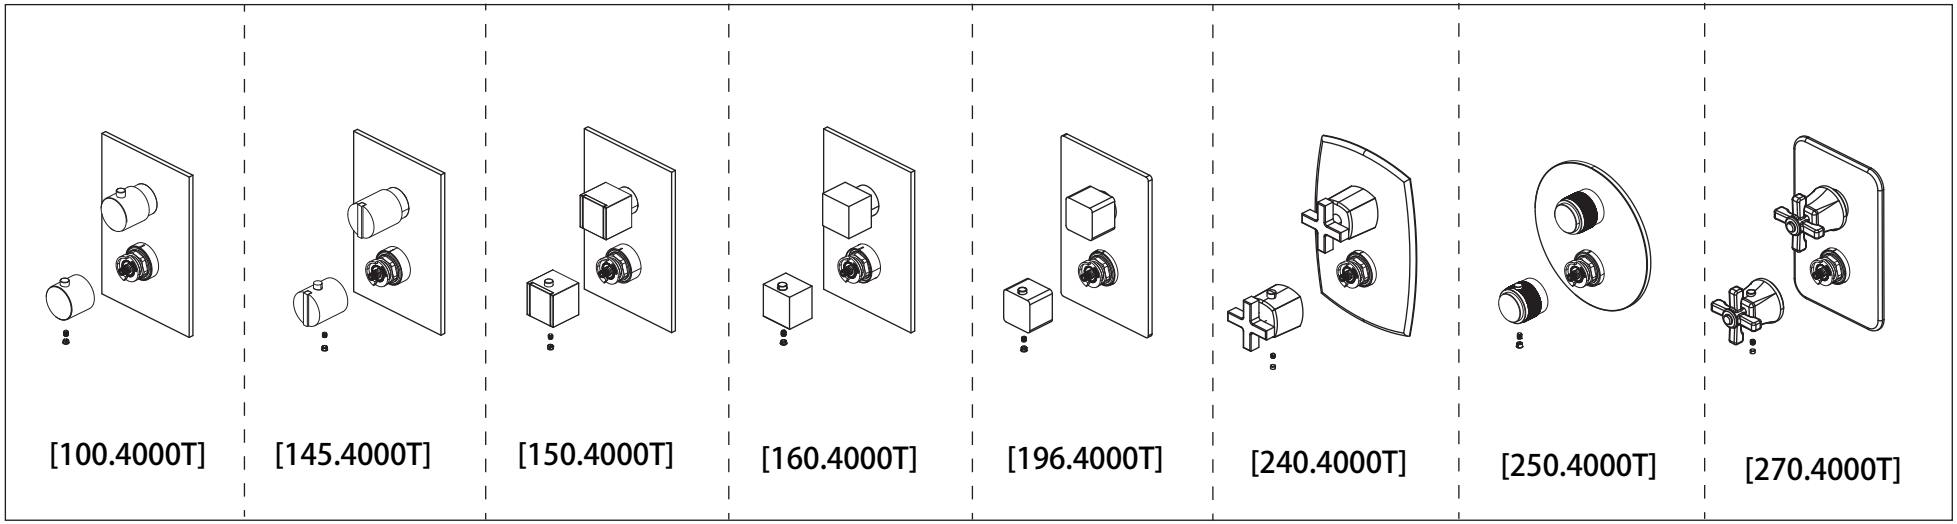


Attach the temperature handle, secure it by tightening the hex screw, and insert the cover button.

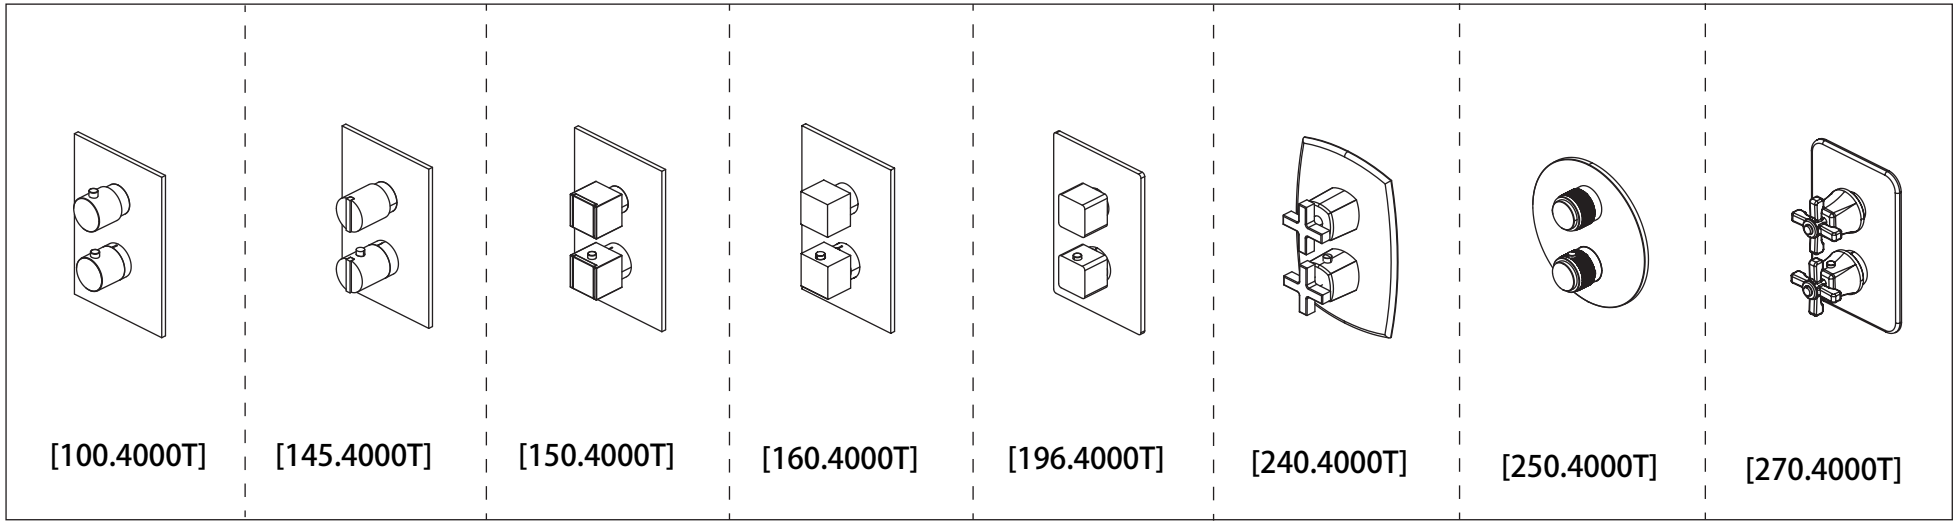


This image illustrates the trim fully installed.