



TVL.2750 | 3/4" Thermostatic Valve With 3-Way Diverter And Integrated Volume Control Page 1 of 2

SPECIFICATIONS:


- Turn Lower Handle to control temperature.
- Upper Handle controls volume & 3-Way water diversion.
- Thermostatic Valve Flow Rate - 9.0 GPM @ 60 PSI
- 0.8" Extension Kit - Part # TVL.2750E**
- No Shared Ports

FINISHES :

- Rough Brass - TVL.2750

STANDARDS:

- ASME A112.18.1 / CSA B125.1

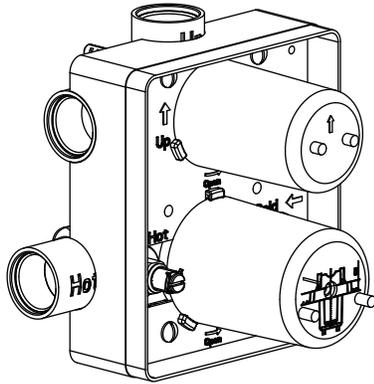

! A separate volume control is **not** needed to turn water supply off. Volume control functionality is integrated within this valve.

CALGreen Compliant




Legislation Compliance



ZeroDrip Technology




Technical Diagram

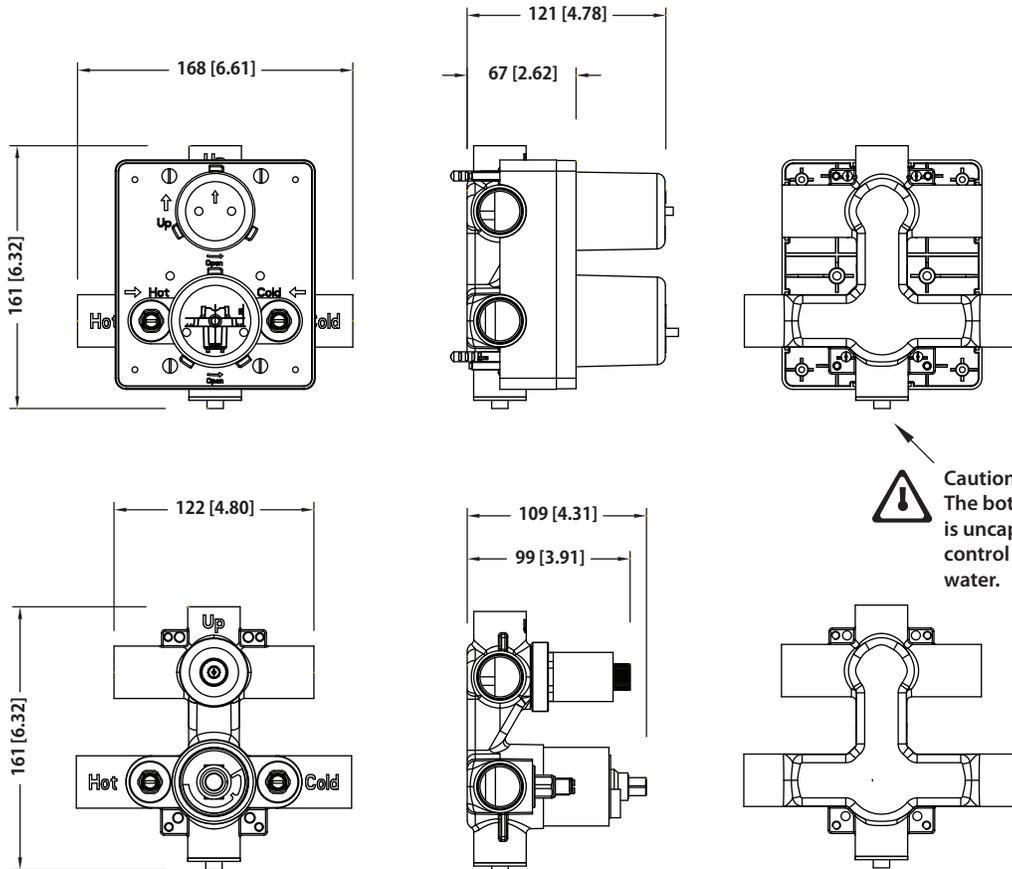


TVL.2750 | 3/4" Thermostatic Valve With 3-Way Diverter And Integrated Volume Control Page 2 of 2




Water Flow Diagram




Diverter Position = 1




Diverter Position = off (-)




Diverter Position = 2



Diverter Position = off (-)



Diverter Position = 3



Diverter Position = off (-)

Trims

196.2750T**

