


SPECIFICATION SUBMITTAL SHEET

JONES STEPHENS CORPORATION

PLASTIC PUSH ON FITTING - STRAIGHT VALVE

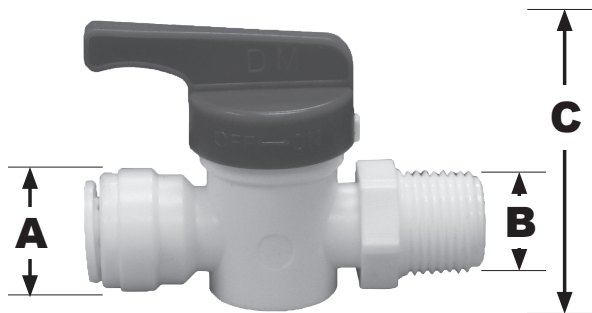

features and benefits:

- Quick and easy installation
- Very durable and fatigue resistant
- Manufactured from safe, non-toxic materials meeting the requirements of the US FDA, WRAS, ANSI/NSF-51, 61 and SK Zert
- All connections can be assembled and disassembled repeatedly

1. Cut the part of the tube to be inserted into the fitting to plane the end.
2. Make sure to use a clean tube without any foreign material or cracks.
3. When inserting the tube, remove any obstructions before fully inserting the tube. Make sure the tube is fully inserted.
4. Inserting the tube into the fitting only takes moderate force. The tube or fitting should not be scratched or damaged in the process, as this is the main cause for water leaks later on.
5. To make sure that the fitting is properly connected to the tube, pull it once. After pulling, insert a spanner under the collet and push the tube into the fitting once more for a complete insertion.
6. When no play is desired for the fitting or tube, use our company's LC to eliminate the play of the fitting.
7. Make sure to completely eliminate pressure before disassembling the fitting.
8. When disassembling the tube, push the clip in direction to the main assembly and then pull the tube out for easy disassembling.
9. Fittings and tubes can be reused.

This product and others like it can be found in the Jones Stephens catalog. Call today to order your catalog or download it from our website: www.plumbest.com

PART NO.	CTS x MIP	A	B	C
□ C76846	1/4" x 1/4"	1/4"ID 5/8"OD	1/4"ID 1/2"OD	1-1/2"

Jones Stephens Corporation
 3249 Moody Parkway • Moody, Alabama 35004
 Toll Free Phone: 1-800-355-6637 • Toll Free Fax: 1-800-462-6991
www.plumbest.com