

JONES STEPHENS' PLUMBITE® PUSH TO CONNECT WATER HEATER CONNECTORS

Product Description

A heat-free method of joining Copper, CPVC, PE-RT or PEX tubing, designed to save time on installation and to connect piping with relative ease and confidence. No soldering, glue, heat or external tools required to join the pipe. Just insert the pipe and the stainless steel gripper ring, bite down and hold the pipe tightly which the EPDM o-ring seals against leakage. Disassembly is just as fast using the optional disassembly tool so fittings can be easily removed and re-used.

Product Features

- Push to Connect Joining Technology (no Soldering, Glue, Heat or External Tools Required)
- Suitable for Copper, PEX, PE-RT or CPVC Piping systems
- Reduced installation time and cost
- Can be disassembled and re-used
- Secure Connections and Seal with Stainless Steel Gripper Ring and EPDM O-Ring
- Ideal for Piping Systems Service and Repair
- Lead Free and Robust Brass Design, Certified for Potable Water Applications
- Manufacturing process includes a final cleaning process to provide a bright and uniform surface finish

Product Specifications


- NSF/ANSI 61 - Certification that this product does not leach harmful health contaminants into drinking water
- NSF/ANSI 372 - Certification to ensure the product lead content meets public safety standards
- NSF/ANSI 14 - Certification that plastic portion of fittings meets physical, performance, health effects and quality assurance standard requirements
- ASSE 1061 - Certified to meet the IAPMO Performance Standards for Push Fittings
- UPC and cUPC - Meet Uniform Plumbing Code Requirements
- IAPMO Certified

Performance Specifications

- Maximum Temperature - 180 degrees F
- Maximum Pressure - 200 PSI Maximum
- Service: Potable Water


Materials

- Brass Body - UNS C46500 Brass
- O-Ring - EPDM, Peroxide Cured
- Gripper Ring - Stainless Steel 304SS
- Lock Ring, Push Ring, Seat Ring - POM
- Disassembly Tool (optional) - POM

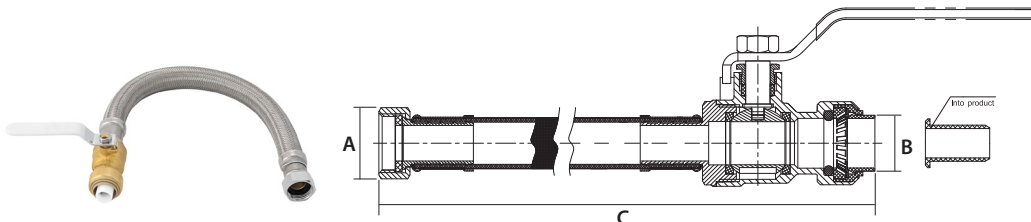

WATER HEATER CONNECTORS WITH BALL VALVE

Part Number Individually Packaged	"A" Nominal	"B" Nominal	"C" (in.)	Weight (oz.)	Weight (g)
C77477LF	3/4" FIP (GH)	3/4"	18	16.9	481
C76616LF	3/4" FIP (GH)	1/2"	18	16.9	481

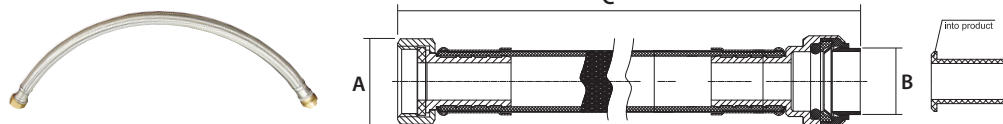

WATER HEATER CONNECTORS

Part Number Individually Packaged	"A" Nominal	"B" Nominal	"C" (in.)	Weight (oz.)	Weight (g)
C76605LF	3/4" FIP (GH)	1/2"	12	7.7	218
C76606LF	3/4" FIP (GH)	1/2"	15	7.9	223
C76607LF	3/4" FIP (GH)	1/2"	18	8.2	234
C76608LF	3/4" FIP (GH)	1/2"	24	8.8	249
C76612LF	3/4" FIP (GH)	3/4"	12	7.7	218
C76613LF	3/4" FIP (GH)	3/4"	15	7.9	223
C77478LF	3/4" FIP (GH)	3/4"	18	8.2	234
C77479LF	3/4" FIP (GH)	3/4"	24	8.8	249