


# LUX XO DUO OVAL

- gently shaped shoulder rest for more pleasure and comfort
- bathing with a friend: two identical back rests and centrally positioned outlet
- made of KALDEWEI steel enamel
- enamelled waste cover integrated in the bath design
- IAPMO
- ASME A112.19.1
- CSA B45.2
- ASTM F-462
- Uniform Plumbing Code (UPC)
- National Plumbing Code (NPC)
- International Plumbing Code (IPC)

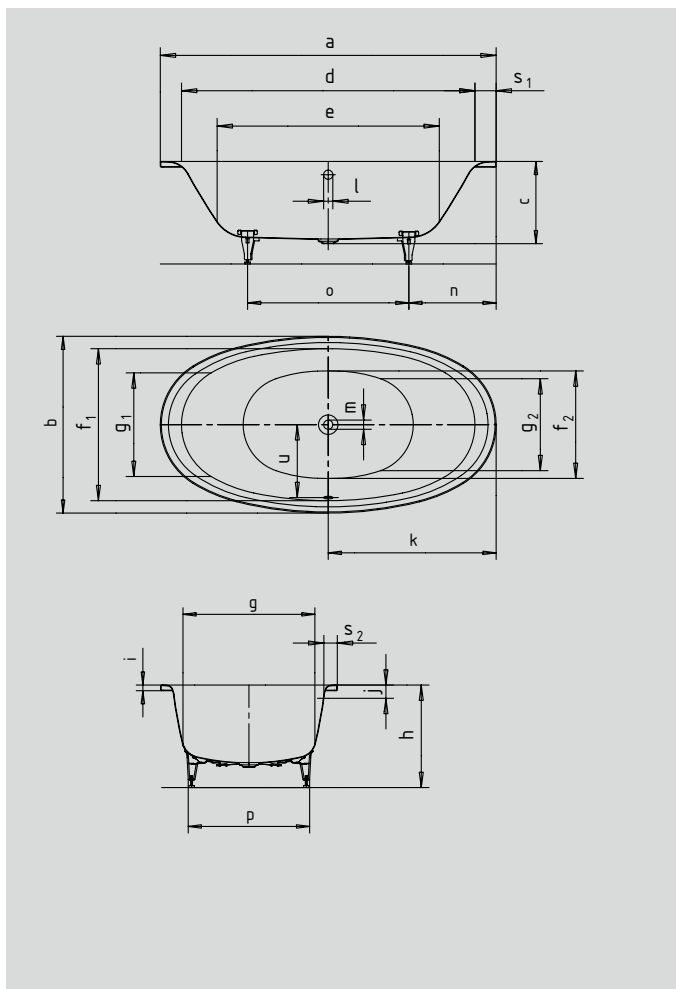

\* Feet kit is an optional accessory

|                                                 |                                 | inch         | mm          | inch         | mm          |
|-------------------------------------------------|---------------------------------|--------------|-------------|--------------|-------------|
| Model No.                                       |                                 | 232          | 232         | 232-7        | 232-7       |
| External length                                 | a                               | 74.80        | 1900        | 74.80        | 1900        |
| External length (bottom)                        | a <sub>1</sub>                  | –            | –           | 39.88        | 1013        |
| External width                                  | b                               | 39.37        | 1000        | 39.37        | 1000        |
| External width (bottom)                         | b <sub>1</sub>                  | –            | –           | 23.94        | 608         |
| Depth                                           | c                               | 17.72        | 450         | 17.72        | 450         |
| Overall height with panel                       | c <sub>1</sub>                  | –            | –           | 21.65        | 550         |
| Internal length (top)                           | d                               | 65.35        | 1660        | 65.35        | 1660        |
| <b>Internal length (bottom)</b>                 | <b>e</b>                        | <b>49.61</b> | <b>1260</b> | <b>49.61</b> | <b>1260</b> |
| Internal width (top)                            | f <sub>1</sub> ; f <sub>2</sub> | 33.86; 24.02 | 860; 610    | 33.86; 24.02 | 860; 610    |
| Internal width (bottom)                         | g <sub>1</sub> ; g <sub>2</sub> | 23.03; 20.47 | 585; 520    | 23.03; 20.47 | 585; 520    |
| Height with feet                                | h                               | 22.24-23.43  | 565-595     | 22.24-23.43  | 565-595     |
| Height of rim                                   | i                               | 1.26         | 32          | 1.26         | 32          |
| Distance top edge to centre of overflow hole    | j                               | 2.95         | 75          | 2.95         | 75          |
| Distance tub edge to centre of drain hole       | k                               | 37.40        | 950         | 37.40        | 950         |
| Diameter of overflow hole                       | l                               | 2.05         | 52          | 2.05         | 52          |
| Diameter of drain hole                          | m                               | 2.05         | 52          | 2.05         | 52          |
| Distance foot end of tub edge to centre of foot | n                               | 23.03        | 585         | 23.03        | 585         |
| Distance between the feet                       | o                               | 28.74        | 730         | 28.74        | 730         |
| Max. width of feet                              | p                               | 24.41        | 620         | 24.41        | 620         |
| Width of rim (foot end; lengthwise)             | s <sub>1</sub> ; s <sub>2</sub> | 4.72; 2.56   | 120; 65     | 4.72; 2.56   | 120; 65     |
| Distance between centre holes                   | u                               | 16.57        | 421         | 16.57        | 421         |
| Water volume** in gallons                       |                                 | 56.52        |             | 56.52        |             |
| Weight of the enamelled bath tub in lbs         |                                 | 121.25       |             | 167.55       |             |

Subject to technical alterations and tolerances.

\*\* 18.49 gallons displacement on average.

**KALDEWEI**