



BF1448-110

STANDARD: TG2 Thermostatic Shower System

SPECIFICATIONS



Components included

- BF1307-110: AQUATONIKTM type T/P 1/2" valve • and decorative trim
- BF1607-110: CalGreen 2-way 1/2" diverter and decorative • trim (operates 1 component at a time)
- BF1392-110: Rainhead with 90° wall arm •
- 103574-110: 2-jet handshower (2 direct functions and • 1 shared function
- 103576-110: Wallbar ٠
- 101620-110: 60" flexible and soft PVC hose
- 102856-110: Wall outlet •

Colors (Finishes)

• Chrome: BF1448-110

Certifications

The specified model meets or exceeds the following standards;



CSA B125.1 WATER EFFICIENT INTERTER ICC A117.1

See the following sheets for the technical features of each component.

Installation Notes

This product must be installed following the installation instructions provided.

WARRANTY

Kalia Inc. guarantees all aspects of its products to be free of defects in material and workmanship for normal residential use. Refer to the warranty included with the Kalia products for details.



1355, 2nd Street, Industrial Park Sainte-Marie (Québec) Canada G6E 1G9





BF1392 STANDARD: Rainhead with 90° Wall arm

SPECIFICATIONS

Features

- Male water inlet 1/2 NPT
- Rainhead dimension: 195 mm (7 11/16")
- Soft tips for easy cleaning of limescale
- Adjustable orientation swivel
- Solid brass arm and plastic rainhead construction

Colors (Finishes)

• Chrome : BF1392-110

Maximum flow rate

• 9.5 L/min (2.5 gpm) at 80 psi




Installation Notes

This product must be installed following the installation instructions provided.

WARRANTY

Kalia Inc. guarantees all aspects of its products to be free of defects in material and workmanship for normal residential use. **Refer to the warranty included with the Kalia products for details**.

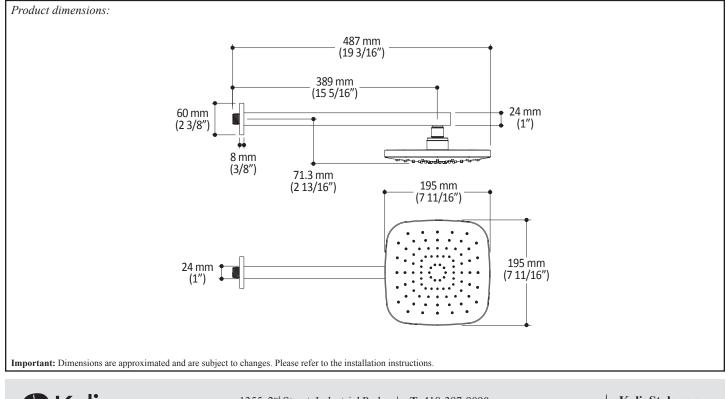



1355, 2nd Street, Industrial Park Sainte-Marie (Québec) Canada G6E 1G9





BF1405 STANDARD: 2-jet handshower, wallbar and

60" flexible and soft PVC hose assembly

SPECIFICATIONS

Features

2-jet handshower (103574-XXX)

- Dimension: 106 mm (4-3/16")
- Anti-scale system with soft sprays
- Water G¹/₂ male inlet
- 2 direct positions and 1 shared position
- Max. flow 9.5 L/min (2.5 gpm) to 80 psi
- Plastic construction

Wallbar (102858-XXX)

- Total height of 699 mm (27-1/2")
- Locking system
- Plastic construction

60" flexible and soft PVC hose (101620-XXX)

• 1/2 female connection

Color (Finish)

• Chrome : BF1405-110

Certifications

The specified model meets or exceeds the following standards;

ASME A112.18.1 / CSA B125.1 Intertek

Packaging

- **Dimensions** : 832 mm x 152 mm x 89 mm (32-3/4" x 6" x 3-1/2")
- Volume : 0.40 cu ft (0.011 cu m)
- Total weight: 2.91 lb (1.32 kg)




Installation Notes

This product must be installed following the installation instructions provided.

WARRANTY

Kalia inc. guarantees all aspects of its products to be free of defects in material and workmanship for normal residential use. **Refer to the warranty included with the Kalia products for details.**

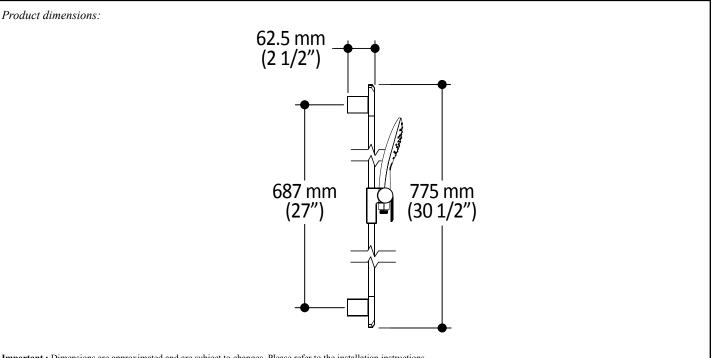

Important : Dimensions are approximated and are subject to changes. Please refer to the installation instructions.



1355, 2nd Street Sainte-Marie (Quebec) Canada G6E 1G9 T 418-387-9090 1-877-GO-KALIA (1-877-465-2542) F 418-387-9089

KaliaStyle.com f の ♯ 跚



GRAFIKTM

BF1307

AQUATONIK[™] type T/P 1/2" valve and decorative trim

SPECIFICATIONS

Features

- Solid brass construction
- No visible screw
- Integrated service stops with check valve
- Male water inlet 1/2NPT threaded or welded
- Can be installed back-to-back
- Total adjustment of 19 mm (3/4")

Colors (Finishes)

Chrome : BF1307-110

Certifications

The specified model meets or exceeds the following standards;

ASME A112.18.1 / CSA B125.1





Packaging

- Dimensions: 370 mm x 190 mm x 205 mm
- $(14 \frac{5}{8} \times 7 \frac{1}{2} \times 8 \frac{1}{8})$
- Volume: 0.014 cu m (0.51 cu ft)
- **Total weight**: 2.48 kg (5.47 lb)

Maximum flow rate

30 liters/min. (7.9 gallons/min.) at 60 psi




Installation Notes

This product must be installed following the installation instructions provided.

WARRANTY

Kalia Inc. guarantees all aspects of its products to be free of defects in material and workmanship for normal residential use. Refer to the warranty included with the Kalia products for details.

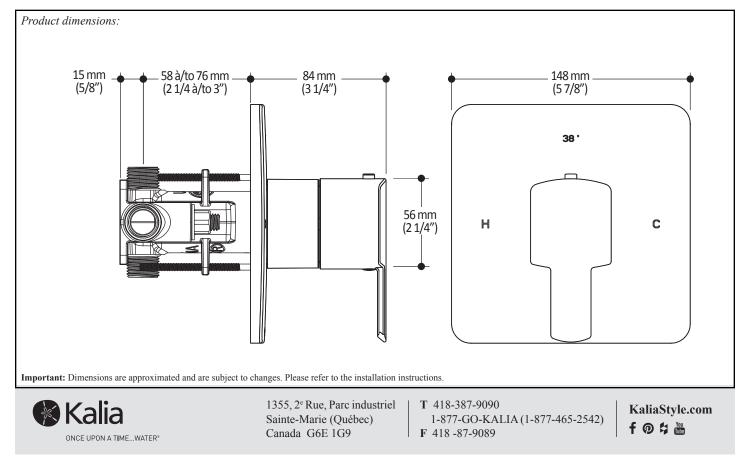

GRAFIKTM



BF1607 CalGreen 2-way 1/2" diverter and Decorative Trim

SPECIFICATIONS

Features

- Solid brass construction
- No visible screw
- Male water inlet 1/2NPT threaded or welded
- Total adjustment of 19 mm (3/4")
- Support for better stability during installation included
- Operates 1 component at a time

Colors (Finishes)

• Chrome : BF1607-110

Certifications

The specified model meets or exceeds the following standards;

Intertek EFFICIENT CSA B125.1 ASME A112.18.1

Packaging

- **Dimensions** : 315 mm x 125 mm x 115 mm (12 ³/₈" x 4 ⁷/₈" x 4 ¹/₂")
- Volume: 0.004 cu m (0.16 cu ft)
- Total weight: 1.22 kg (2.69 lb)

Maximum flow rate

• 1 outlet: 16 liters/min. (4.3 gallons/min.) at 60 psi




Installation Notes

This product must be installed following the installation instructions provided.

WARRANTY

Kalia Inc. guarantees all aspects of its products to be free of defects in material and workmanship for normal residential use. **Refer to the warranty included with the Kalia products for details**.

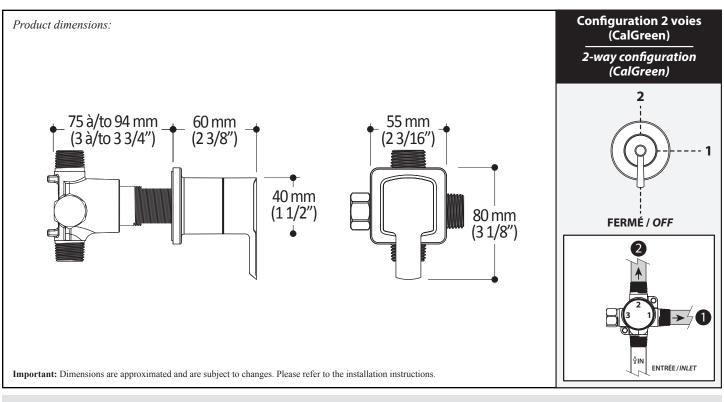



1355, 2nd Street, Industrial Park Sainte-Marie (Québec) Canada G6E 1G9





102856 Square Wall Outlet *SPÉCIFICATIONS*

Features

- Male or female water inlet 1/2NPT
- Male water oulet G1/2
- Solid brass construction

Colors (Finishes)

- Chrome: 102856-110
- Matte black: 102856-160

Certifications

The specified model meets or exceeds the following standards;






Installation Notes

This product must be installed following the installation instructions provided.

WARRANTY

Kalia Inc. guarantees all aspects of its products to be free of defects in material and workmanship for normal residential use. **Refer to the warranty included with the Kalia products for details**.

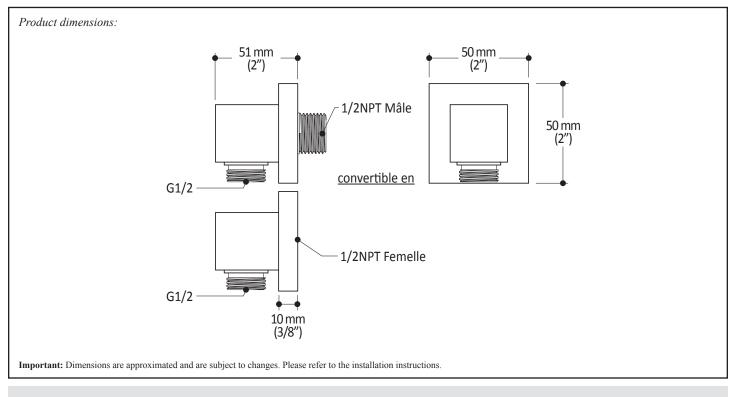



1355, 2nd Street, Industrial Park Sainte-Marie (Québec) Canada G6E 1G9

