


Installation Guide

Duostrainer Installation

P34004



KALLISTA.

1274848-2-A

Thank You For Choosing Kallista

We appreciate your commitment to KALLISTA quality products. Please take a moment to review this manual before you install your KALLISTA product. If you encounter any installation or performance problems, please do not hesitate to contact us at the phone number listed on the back cover.


Tools and Materials




Plumbers Putty



Large Pliers



Adjustable Wrench

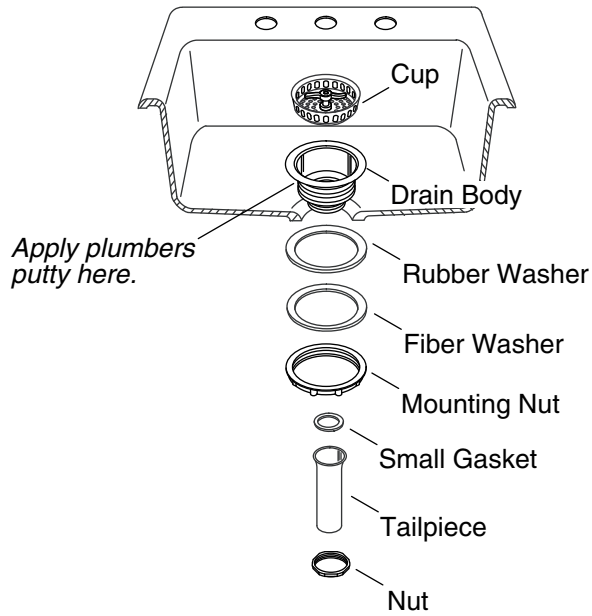

1. Install the Strainer

All information in these instructions is based upon the latest product information available at the time of publication. Kallista reserves the right to make changes in product characteristics at any time without notice.

- Apply a ring of plumbers putty or other sealant to the underside of the edge of the drain body according to the manufacturer's instructions.
- Insert the drain body in the sink.
- From under the sink, slide the rubber washer, then fiber washer onto the drain body. Thread the mounting nut onto the drain body until it is hand tight.
- Tighten fully using a large pliers.

NOTE: Do not reposition the drain body after it has been tightened.

- Position the small gasket on the drain body.

Install the Strainer (cont.)

- Align the wide end of the tailpiece with the drain or strainer body, slide the nut onto the tailpiece, and thread the nut to the drain body.
- Position the P-trap (not shown) on the end of the tailpiece.
- Tighten the P-trap nut, and remove any excess sealant.

1274848-2-A

1274848-2-A

1274848-2-A

USA/Canada: 1-888-4-KALLISTA

Fax: 1-888-272-3094

kallista.com

KALLISTA.

©2015 KALLISTA

1274848-2-A