

## FEATURES

- Solid metal construction for durability and reliability
- Pressure-balancing technology maintains water temperature within +/- 3 degrees Fahrenheit
- High-temperature limit stop allows you to preset a comfortable maximum temperature to eliminate scalding
- Complements the Klyne collection

## CODES/STANDARDS APPLICABLE



Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1 (Pending)
- ICC/ANSI A117.1 (Pending)
- ADA\* (Pending)
- OBC\* (Pending)
- CSA B651\* (Pending)

**ADA** **CSA B651** **OBC**

\* Compliant when installed to the specific requirement of this regulation

## P26010

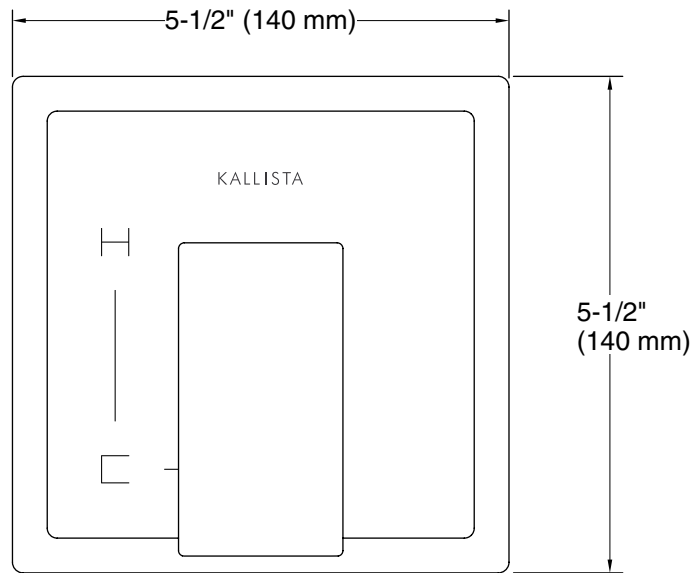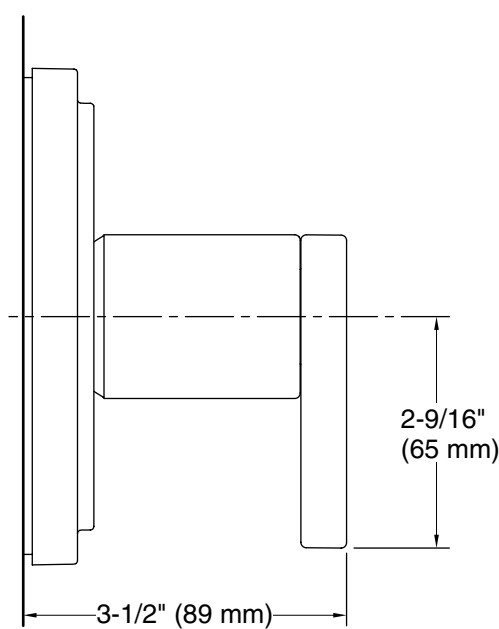

| SPECIFIED MODEL   |  |   |   |   |
|-------------------|--|---|---|---|
| Model             | Description                                    | Finishes                                    |   |   |
| P26010-LV         | Klyne Pressure Balance Valve Trim              | <input type="checkbox"/> CP Polished Chrome | <input type="checkbox"/> AD Nickel Silver | <input type="checkbox"/> BL Matte Black |
| Required Rough-in |  |   |   |   |
| P19310-00         | Pressure Balance Rough-in                      | <input type="checkbox"/> NA                 |   |   |
| P19310-US         | Pressure Balance Valve, with stops - PEX inlet | <input type="checkbox"/> NA                 |   |   |
| P19310-WS         | Pressure Balance Rough-in with Stops           | <input type="checkbox"/> NA                 |   |   |

We reserve the right to make revisions without notice in the design of products or in packaging unless this right has specifically been waived at the time the order is accepted.