

FEATURES

- Brass construction for durability and reliability
- Patented K-joint installation ensures consistent trim appearance, regardless of variability in valve rough-in
- Single handle allows for simultaneous on/off activation and temperature setting
- Compliments transitional and contemporary designs as well as the One™ collection
- For project/hospitality specifications only


CODES/STANDARDS APPLICABLE

Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- ADA
- ICC/ANSI A117.1
- CSA B651
- OBC

P23329

ADA	CSA B651	OBC
------------	-----------------	------------

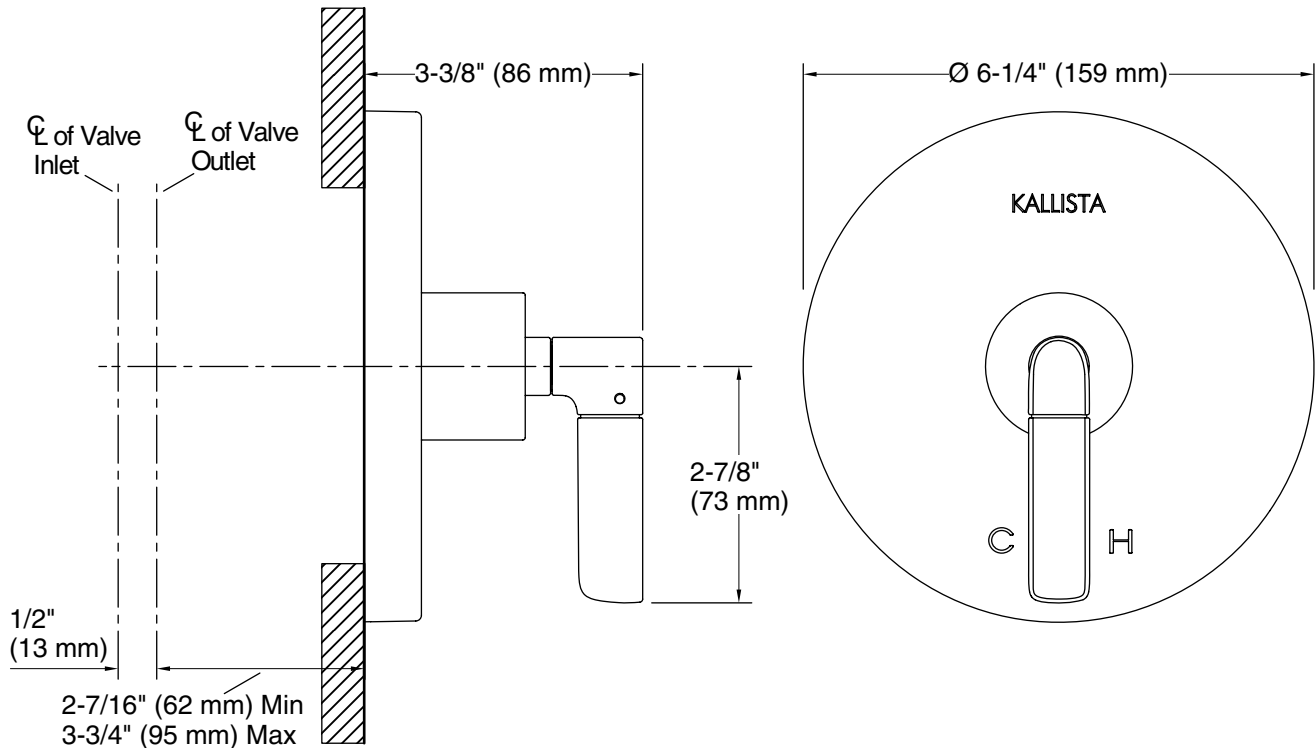

SPECIFIED MODEL		
Model	Description	Finishes
P23329-LV	One Nazaré Thermostatic Trim	<input type="checkbox"/> CP Polished Chrome <input type="checkbox"/> SN Polished Nickel
Required Rough-In		
P29511-WS	1/2" Thermostatic Mixing Valve	<input type="checkbox"/> NA
P29512-WS	3/4" Thermostatic Mixing Valve	<input type="checkbox"/> NA

We reserve the right to make revisions without notice in the design of products or in packaging unless this right has specifically been waived at the time the order is accepted.