

FEATURES

- Solid brass construction for durability and reliability
- Pressure-balancing technology maintains water temperature within +/- 3 degrees Fahrenheit
- High-temperature limit stop allows you to preset a comfortable maximum temperature to eliminate scalding
- Complements the Pure Paletta collection


CODES/STANDARDS APPLICABLE

Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1 (pending)
- ICC/ANSI A117.1 (pending)
- ADA* (pending)
- OBC* (pending)
- CSA B651* (pending)

* Compliant when installed to the specific requirement of this regulation

P24918

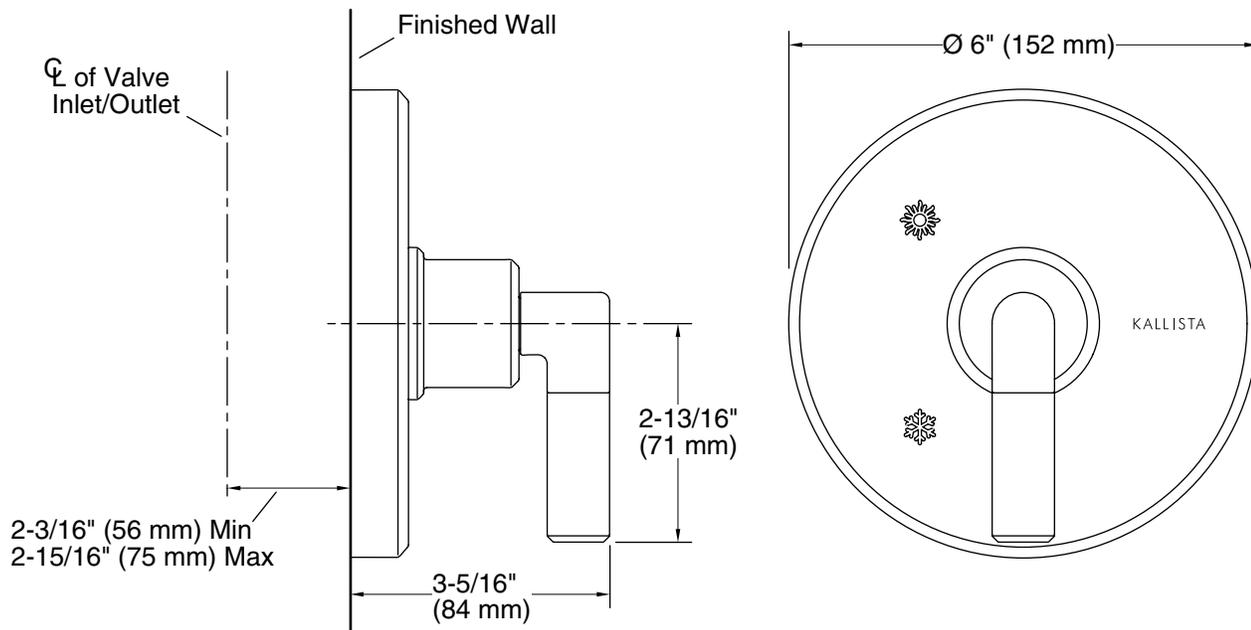

SPECIFIED MODEL

Model	Description	Finishes	
P24918-LV	Pure Paletta Pressure Balance Valve Trim, Lever Handle	<input type="checkbox"/> CP Polished Chrome	<input type="checkbox"/> SN Polished Nickel
Required Rough-In			
P19310-00	Pressure Balance Rough-in for P24918	<input type="checkbox"/> NA	
P19310-US	Pressure Balance Valve, with stops - PEX inlet (cold expansion)	<input type="checkbox"/> NA	
P19310-WS	Pressure Balance Rough-in with Stops for P24918	<input type="checkbox"/> NA	
P29500-00	Pressure Balance Rough-in & Thermostatic Cartridge for P24918	<input type="checkbox"/> NA	
P29500-WS	Pressure Balance Rough-in & Thermostatic Cartridge with Stops for P24918	<input type="checkbox"/> NA	

We reserve the right to make revisions without notice in the design of products or in packaging unless this right has specifically been waived at the time the order is accepted.