

### Features

- Frameless design emphasizes glass and creates a sleek, minimalist look.
- Full-length magnetic seal keeps door firmly closed, providing excellent water containment.
- Innovative "L" bracket secures the fixed panel in place and gives it a sturdy feel while also being unobtrusive to the showering space.
- Continuous 7/8" high aluminum bottom threshold.
- Back-to-back 11-1/2" (292 mm) vertical shower door pulls.
- Coordinates with other products in the Composed® collection.

### Material

- Frameless, 3/8" (10 mm) Clear tempered glass.
- Anodized aluminum hardware prevents rusting or corrosion.

### Technology


- CleanCoat® nanotechnology helps prevent bacteria, mildew and water stains on your glass, making it easy to clean and looking new.

### Installation

- Fits opening widths 45"–46-3/8" (1143–1178 mm).
- 1-3/8" (35 mm) width adjustment.
- 3/8" (9.5mm) out-of-plumb adjustability per side allows for simpler installation.
- Door can be installed to open to the left or right to suit your bathroom layout.
- For residential use only.
- Not for use in hospitality.

### Included Components

Additional Components:  
Hardware kit

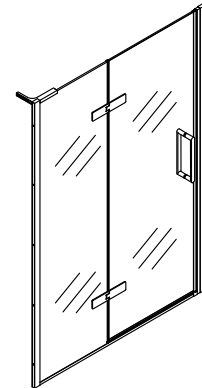

### Codes/Standards

ANSI Z97.1  
CPSC 16CFR 1201

### KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*


Color	Code	Description
-------	------	-------------

	SHP	
--	-----	--

### Available Glass Options

Code	Description
------	-------------

L	Crystal Clear
---	---------------

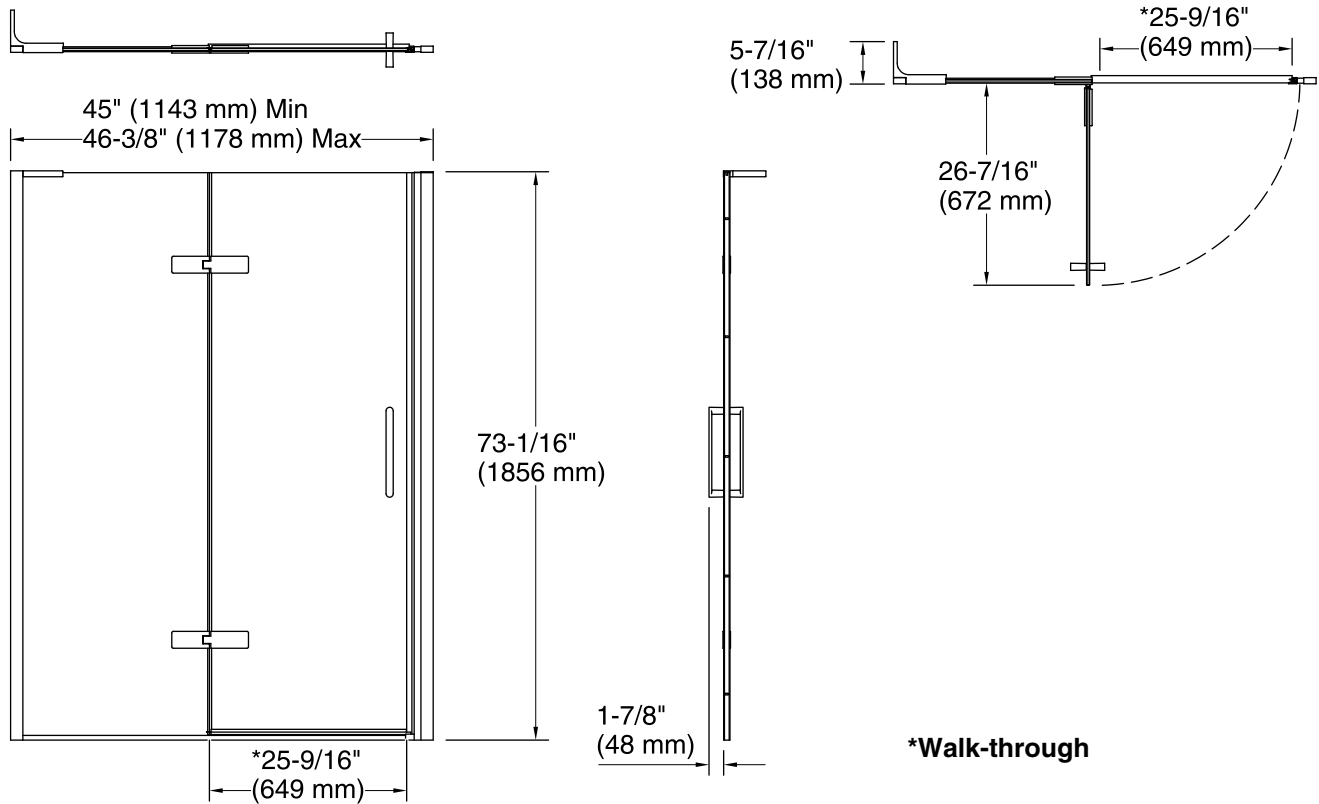

### Technical Information

All product dimensions are nominal.

Installation type: For shower base installation

Opening Width - Min: 45" (1143 mm)

Opening Width - Max: 46-3/8" (1178 mm)

Walk-through - Min: 25-9/16" (649 mm)

Walk-through - Max: 25-9/16" (649 mm)

Glass thickness: 3/8" (10 mm)

Glass coating: CleanCoat®

### Notes

Install this product according to the installation instructions.

The vertical opening should be a minimum of 75" (1905 mm) to allow for installation clearance.