

Anthem® | K-26335-9

Two-way exposed thermostatic valve and control panel with integrated handshower holder

Features

- Modern, simplistic exposed thermostatic valve serves as a hub for shower controls
- Mechanically controlled thermostatic mixing valve maintains outlet temperature throughout shower experience
- Control panel includes adjustable temperature dial with integrated adjustable high-temperature limit feature, shower outlet on/off buttons, and one filter for each outlet with space for up to four filters
- When pressed once, shower outlet turns on and button pops out, becoming a knob for water flow adjustment
- When pressed back in, water turns off and outlet button aligns with control plate surface; flow setting remains intact
- 1/2" Universal NPT and direct sweat inlets and outlets
- Requires a single-function rainhead, handshower, and hose (sold separately)



Available Colors/Finishes

Color tiles intended for reference only.

CP	Polished Chrome
SN	Vibrant Polished Nickel
AF	Vibrant French Gold
BN	Vibrant Brushed Nickel
BV	Vibrant Brushed Bronze
BL	Matte Black
2MB	Vibrant Brushed Moderne Brass
TT	Vibrant Titanium



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
7-15-2026 20:00 - US-CA

THE BOLD LOOK
OF **KOHLER®**

Codes/Standards

ASME A112.18.1/CSA B125.1
ASSE 1016/ASME A112.1016/CSA B125.16

Technical Information

All product dimensions are nominal.

Handle

Handle Style/Type: Knob

Valves

Included Valve: Thermostatic

Shower Valve

Flow Rate Maximum @ 45 psi: 5 gpm (18.9 l/min)

Manufacturer's Minimum Rated Flow: 1.3 gpm (4.9 l/min)

Pressure: 45 psi (3.1 bar)

Maximum Static Pressure: 125 psi (8.6 bar)

Minimum Operating Pressure: 20 psi (1.4 bar)

Material

- Premium material construction for durability and reliability
- KOHLER finishes resist corrosion and tarnishing

Recommended Products/Accessories

K-26282 Round three-function handshower, 2.5 gpm
K-26282-G Round three-function handshower, 1.75 gpm
K-26284 Oblong three-function handshower, 2.5 gpm
K-26284-G Oblong three-function handshower, 1.75 gpm
K-26294 Oblong 14" single-function rainhead, 2.5 gpm
K-9514 60" metal shower hose

Technology


- Thermostatic technology automatically maintains outlet temperature within +/- 3.6°F (+/- 2°C) during water pressure fluctuations

Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty



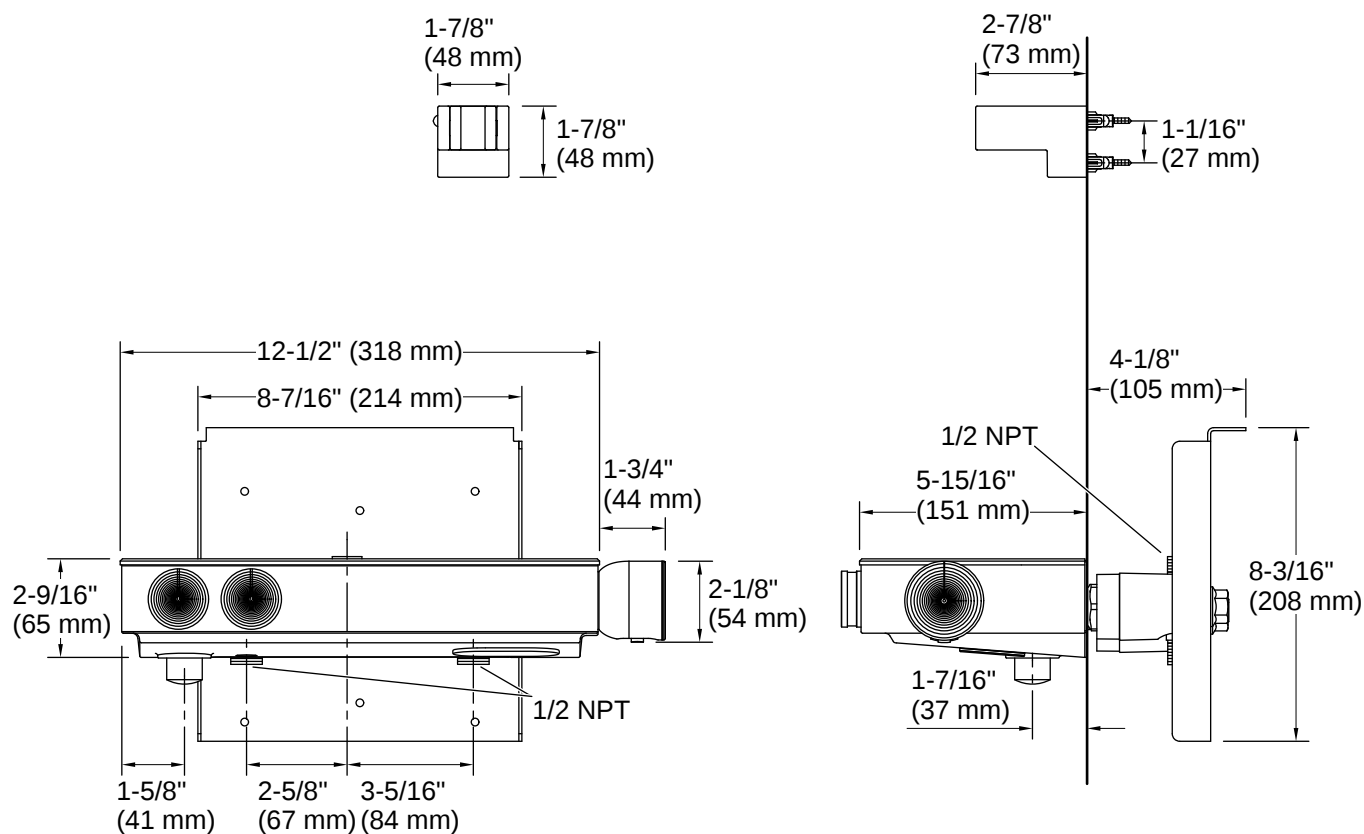

Installation

- Valve is fully serviceable from control panel

Installation Notes

Install this product according to the installation instructions.

For use with showerheads or handsprays rated at 1.3 gal/min (4.9 l/min) or higher.

