

# **Composed®**

Frameless pivot shower door K-27614-10L

#### **Features**

- Frameless design emphasizes glass and creates a sleek, minimalist look.
- Full-length magnetic seal keeps door firmly closed, providing excellent water containment.
- Innovative "L" bracket secures the fixed panel in place and gives it a sturdy feel while also being unobtrusive to the showering space.
- Continuous 7/8" high aluminum bottom threshold.
- Back-to-back 11-1/2" (292 mm) vertical shower door pulls.
- Coordinates with other products in the Composed® collection.

### Material

- Frameless, 3/8" (9.5 mm) Clear tempered glass.
- Anodized aluminum hardware prevents rusting or corrosion.

### Technology

 CleanCoat® nanotechnology helps prevent bacteria, mildew and water stains on your glass, making it easy to clean and looking new.

#### Installation

- Fits opening widths 57"-58-3/8" (1447.8-1482.7 mm).
- 1-3/8" (35 mm) width adjustment.
- 3/8" (9.5mm) out-of-plumb adjustability per side allows for simpler installation.
- Door can be installed to open to the left or right to suit your bathroom layout.
- Product ships in two boxes, offering easy handling.
- For residential use only.
- Not for use in hospitality.

# **Included Components**

Additional Components:

Hardware kit



#### Codes/Standards

ANSI Z97.1 CPSC 16CFR 1201

KOHLER® One-Year Limited Warranty See website for detailed warranty information.

See website for detailed warranty information.

#### Available Colors/Finishes

Color tiles intended for reference only.

**Color Code Description** 

SHP

Available Glass Options
Code Description


. Crystal Clear





# **Composed®**

Frameless pivot shower door K-27614-10L

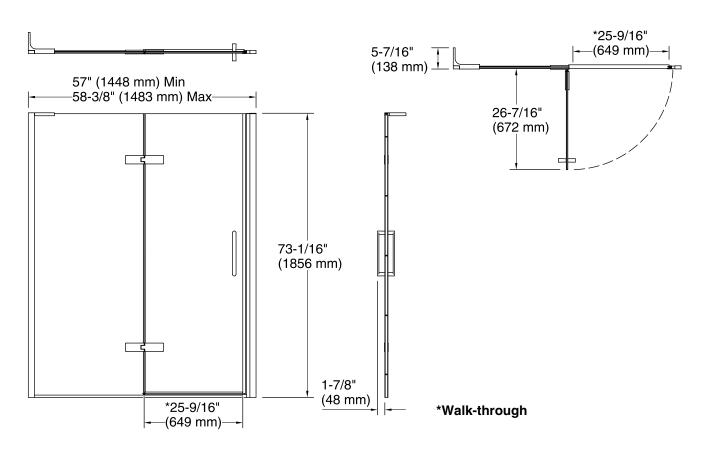

## **Technical Information**

All product dimensions are nominal.

Installation type: For shower base installation

Opening Width - Min: 57" (1448 mm)

Opening Width - Max: 58-3/8" (1483 mm)

Walk-through - Min: 25-9/16" (649 mm)

Walk-through - Max: 25-9/16" (649 mm)

Glass thickness: 3/8" (10 mm)

Glass coating: CleanCoat®

#### **Notes**

Install this product according to the installation instructions.

The vertical opening should be a minimum of 75" (1905 mm) to allow for installation clearance.

