



60" x 42" alcove bath **K-1113-F** 

#### **Features**

- Oval basin creates a spacious bathing experience
- Integral lumbar support and armrests offer extra comfort while bathing
- Four-sided integral flange

### Material

Acrylic

### Installation

- Reversible drain
- Alcove

# **Required Products/Accessories**

K-T37391 Rotary-turn bath drain trim K-T37392 Rotary-turn bath drain trim

or

K-37383 Rough-in cable bath drain, PVC, 30" cable with tubing

K-78438 30" cable bath drain

### **Recommended Products/Accessories**

K-11677 Bath Drain

K-1491 Bath/Whirlpool Pillow

K-1601 Bath/whirlpool footstop, removable

K-7213 27" Cable Bath Drain

K-7214 27" Cable Bath Drain

K-7265 Brass toe tap bath drain

K-23726 Drain treatment



### Codes/Standards

CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662

# **KOHLER® Plastic Baths and Shower Bases Lifetime Limited Warranty**

See website for detailed warranty information.

### **Available Colors/Finishes**

Color tiles intended for reference only.

**Color Code Description** 


0 White





# **KOHLER**®

60" x 42" alcove bath **K-1113-F** 

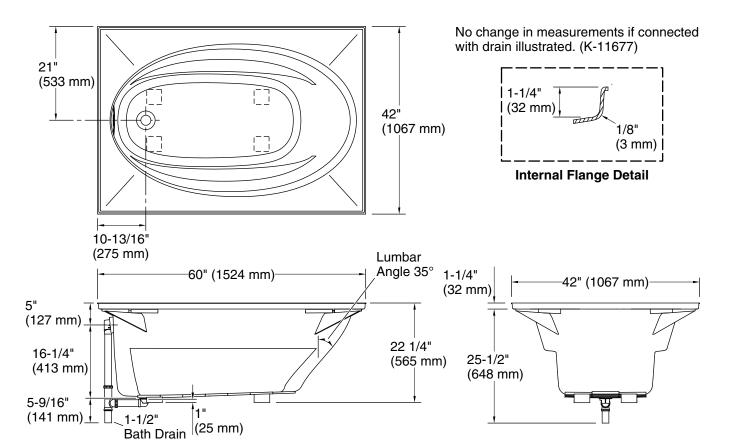

### **Technical Information**

All product dimensions are nominal.

Drain location: Reversible

Basin area, bottom: 41" x 20-1/2" (1041 mm x 521 mm)

Basin area, top: 53-1/2" x 32-1/8" (1359 mm x 816 mm)

Weight: 80 lbs (36.3 kg)

Minimum floor load: 35 lbs/ft<sup>2</sup> (170.9 kg/m<sup>2</sup>)

Water depth: 15" (381 mm)
Water capacity: 57 gal (215.8 L)

Cutout: Drop-in, 58-1/2" x 40-1/2" (1486 mm x

1029 mm)

Minimum flat for 3-1/4" (83 mm)

door:

## **Notes**

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary

If installing a rim-mount faucet, make sure there is no interference above or below the deck

before drilling any holes.

