



**Windward®**

72" x 42" alcove bath, left drain  
**K-1115-L**

### Features

- Oval basin creates a spacious bathing experience
- Spacious design accommodates up to two bathers
- Integral lumbar support and armrests offer extra comfort while bathing
- Integral flange helps prevent water from seeping behind wall and simplifies alcove installation

### Material

- Acrylic

### Installation

- Left drain
- Alcove

### Required Products/Accessories

K-T37391 Rotary-turn bath drain trim

K-T37392 Rotary-turn bath drain trim

or

K-37383 Rough-in cable bath drain, PVC, 30" cable with tubing

K-78438 30" cable bath drain

### Recommended Products/Accessories

K-11677 Bath Drain

K-23726 Drain treatment



### Codes/Standards

CSA B45.5/IAPMO Z124

ASTM E162

ASTM E662

### KOHLER® Plastic Baths and Shower Bases Lifetime Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

| Color | Code | Description |
|-------|------|-------------|
|-------|------|-------------|



0

White

1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.


For the most current Specification Sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada

9-18-2025 17:18 - US/CA

THE BOLD LOOK  
OF **KOHLER®**





**Windward®**  
72" x 42" alcove bath, left drain  
**K-1115-L**

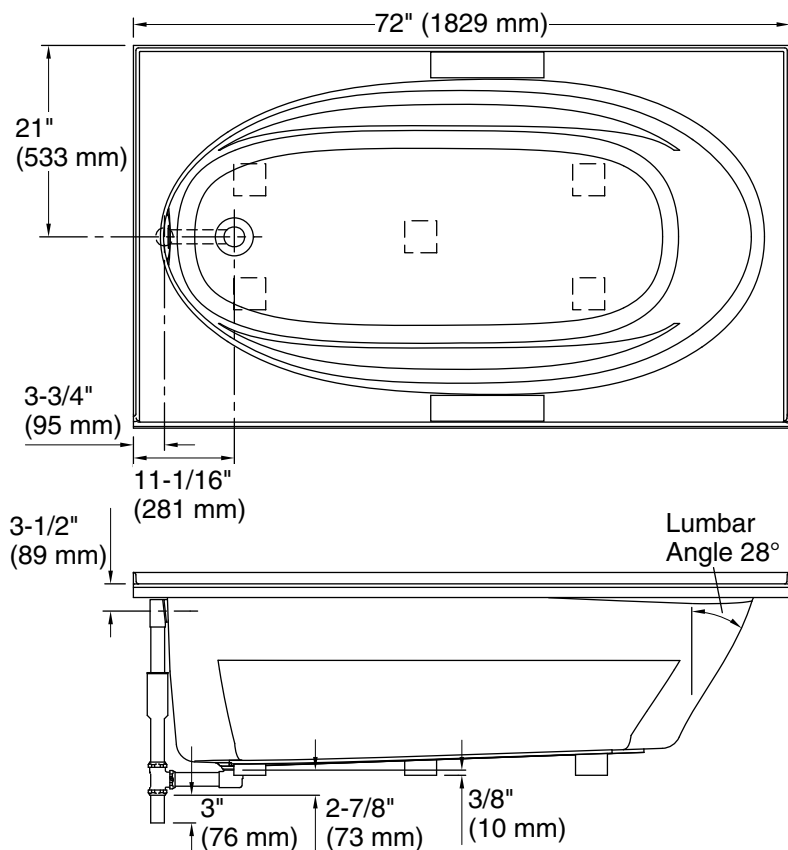

No change in measurements if connected with drain illustrated. (K-11677)

 Recommended Faucet Location

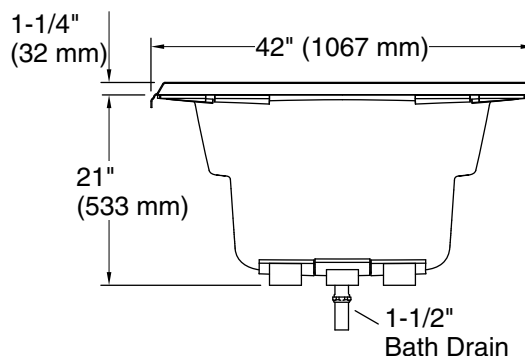

### Technical Information

All product dimensions are nominal.

|                        |                                                   |
|------------------------|---------------------------------------------------|
| Drain location:        | Left                                              |
| Basin area, bottom:    | 55" x 23-1/4" (1397 mm x 591 mm)                  |
| Basin area, top:       | 64" x 32" (1626 mm x 813 mm)                      |
| Weight:                | 100 lbs (45.4 kg)                                 |
| Minimum floor load:    | 38 lbs/ft <sup>2</sup> (185.5 kg/m <sup>2</sup> ) |
| Water depth:           | 15" (381 mm)                                      |
| Water capacity:        | 78.5 gal (297.2 L)                                |
| Minimum flat for door: | 3-1/16" (78 mm)                                   |

### Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

If installing a rim-mount faucet, make sure there is no interference above or below the deck before drilling any holes.