



**Underscore®**  
60" x 30" alcove bath with Bask® heated surface, right  
drain  
**K-1121-RW**

### Features

- Bask® heated surface creates spa-like relaxation with soothing warmth on your back, shoulders, and neck
- Customize the heat with three adjustable settings
- Integral lumbar support
- Slotted overflow allows for deep soaking
- Integral flange helps prevent water from seeping behind wall and simplifies alcove installation

### Material

- Acrylic

### Installation

- Right drain
- Undermount
- Alcove
- Requires 110 V electrical service

### Required Products/Accessories

K-7271 Brass Slotted Overflow Bath Drain

or

K-7272 PVC Slotted Overflow Bath Drain

### Recommended Products/Accessories

K-1491 Bath/Whirlpool Pillow

K-1601 Bath/whirlpool footstop, removable

K-23726 Drain treatment



**ADA**

### Codes/Standards

CSA B45.5/IAPMO Z124

ASTM E162

ASTM E662

ADA

ICC/ANSI A117.1

cUL Listed

UL Listed

**KOHLER® Plastic Baths and  
Shower Bases Lifetime Limited  
Warranty KOHLER® Hydrotherapy  
Components Five-Year Limited  
Warranty**

See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

| Color                                                                               | Code | Description  |
|-------------------------------------------------------------------------------------|------|--------------|
|  | 0    | White        |
|  | 96   | Biscuit      |
|  | 95   | Ice™ Grey    |
|  | 7    | Black Black™ |

1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada

9-18-2025 17:20 - US/CA


THE BOLD LOOK  
OF **KOHLER®**



**Underscore®**


60" x 30" alcove bath with Bask® heated surface, right  
drain  
**K-1121-RW**

No change in measurement if connected  
with drain illustrated. (K-7272)



**Integral Flange Detail**


Access Panel  
20" (508 mm) L x 15" (381 mm) H Min



1-1/2" Bath Drain

Heater pad  
is located  
on this side

Lumbar  
Angle 40°

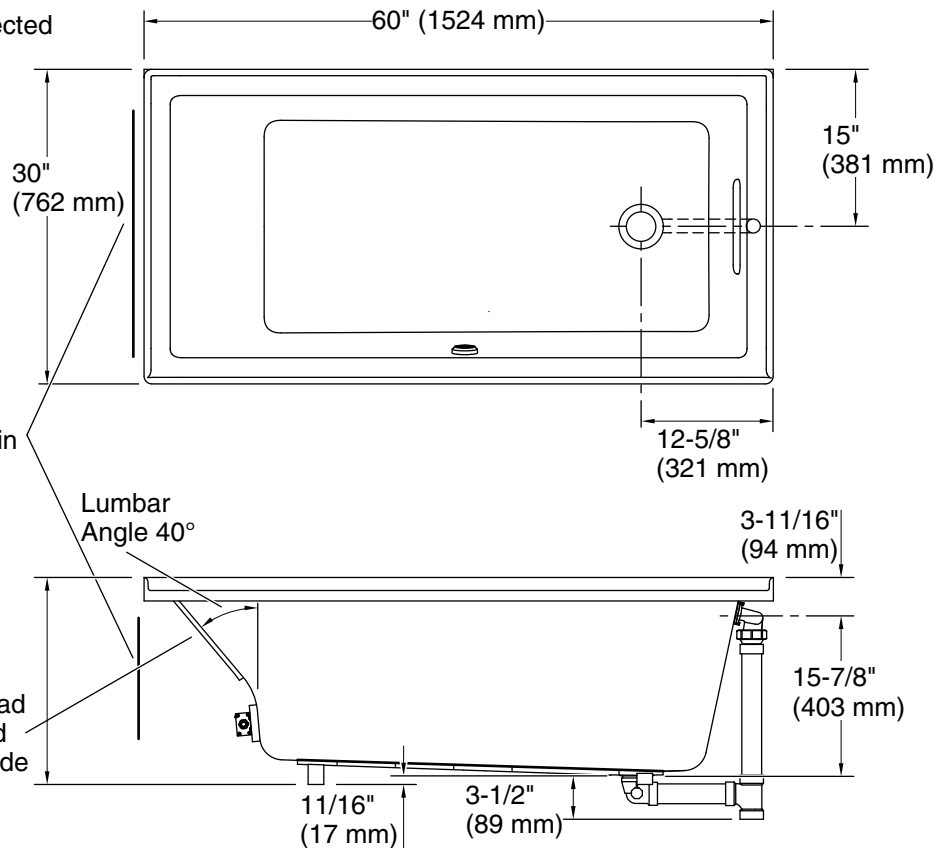

### Required Electrical Service

One circuit required, protected with Class A Ground-Fault  
Circuit-Interrupter (GFCI). Outside North America, this device  
may be known as a Residual Current Device (RCD).

Heated Surface: 120 V, 15 A

### Technical Information

All product dimensions are nominal.

Drain location: Right

Basin area, bottom: 42-7/16" x 20" (1078 mm x 508 mm)

Basin area, top: 54-5/16" x 24-1/4" (1380 mm x 616 mm)

Weight: 81 lbs (36.7 kg)

Minimum floor load: 42 lbs/ft<sup>2</sup> (205.1 kg/m<sup>2</sup>)

Water depth: 15-1/8" (384 mm)

Water capacity: 59.8 gal (226.4 L)

Electrical component rating: Heated Surface: 120 V, 0.5 A, 60 Hz

Minimum flat for door: 1-15/16" (49 mm)

### Notes

Measure your actual product for rough-in  
details.

Install this product according to the installation  
instructions.

The hot water supply should be 70% of the  
capacity of the bath or greater. Installations will  
vary.

ADA compliant when installed to the specific  
requirements of these regulations.

1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada

9-18-2025 17:20 - US/CA

THE BOLD LOOK  
OF **KOHLER®**