K-1123



### **Features**

- Comfort Depth® design offers a convenient 19" step-over height while retaining the same depth as a standard 21" bath
- Integral lumbar support
- Slotted overflow allows for deep soaking
- Textured bottom surface
- Coordinates with other products in the Archer collection

### Material

Acrylic

## Installation

- Reversible drain
- Requires K-7271 or K-7272 Clearflo slotted overflow bath drain (sold separately)
- Drop-in

## **Required Products/Accessories**

K-7271 Brass Slotted Overflow Bath Drain

or

K-7272 PVC Slotted Overflow Bath Drain

## **Recommended Products/Accessories**

K-706000-D3 Frameless Sliding Bath Door K-706000-L 62" H sliding bath door with 1/4"-thick glass K-706004-D3 Frameless Sliding Bath Door K-706004-L Frameless Sliding Bath Door K-23726 Drain treatment



# ADA

## Codes/Standards CSA B45.5/IAPMO Z124

ADA ICC/ANSI A117.1

## **KOHLER® Plastic Baths and Shower Bases Lifetime Limited Warranty**

See website for detailed warranty information.

### Available Colors/Finishes

Color tiles intended for reference only.


Color	Code	Description
	0	White
	96	Biscuit
	NY	Dune
	95	Ice™ Grey
	7	Black Black™





# **KOHLER**®

60" x 32" drop-in bath **K-1123** 

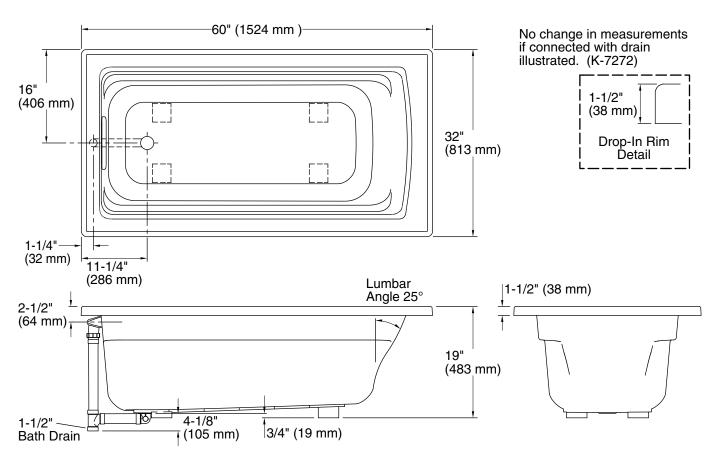

## **Technical Information**

All product dimensions are nominal.

Drain location: Reversible

Basin area, bottom: 45-1/8" x 19-11/16" (1146 mm x

500 mm)

Basin area, top: 52-3/4" x 25-5/16" (1340 mm x 643 mm)

Weight: 70 lbs (31.8 kg)

Minimum floor load: 44 lbs/ft<sup>2</sup> (214.8 kg/m<sup>2</sup>)

Water depth: 15" (381 mm)
Water capacity: 58 gal (219.6 L)

Cutout: Drop-in, 58-1/2" x 30-1/2" (1486 mm x

775 mm)

Minimum flat for 2-1/8" (54 mm)

door:

### **Notes**

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will

ADA compliant when installed to the specific

