

## Features

- Single-speed whirlpool offers performance and value, with 6 fully adjustable jets.
- Hydromassage flow and direction can be controlled at each jet.
- Spacious design accommodates up to two bathers.
- Corner layout minimizes footprint without compromising bathing area.
- Integral faucet deck.

## Material

- Acrylic

## Hydrotherapy

- Whirlpool

## Installation

- Drop-in

## Additional Hydrotherapy Options

- Soaking Bath - 1155-0
- Whirlpool - 1154-0
- Whirlpool + heater - 1154-H

## Recommended Products/Accessories

K-11677 Bath Drain  
K-1491 Bath/Whirlpool Pillow  
K-1601 Bath/Whirlpool Footstop  
K-7213 27" Cable Bath Drain  
K-7214 27" Cable Bath Drain  
K-24916 Wireless Music Kit  
K-7259 Clearflo Bath Drain



## Codes/Standards

ASME A112.19.7/CSA B45.10  
CSA B45.5/IAPMO Z124  
UL 1795

## KOHLER® Plastic Baths and Receptors Lifetime Limited Warranty




## KOHLER® Hydrotherapy Components Five-Year Limited Warranty

See website for detailed warranty information.



## Available Colors/Finishes

*Color tiles intended for reference only.*


### Color Code Description

	0	White
	96	Biscuit
	47	Almond


No change in measurements if connected with drain illustrated. (K-11677)

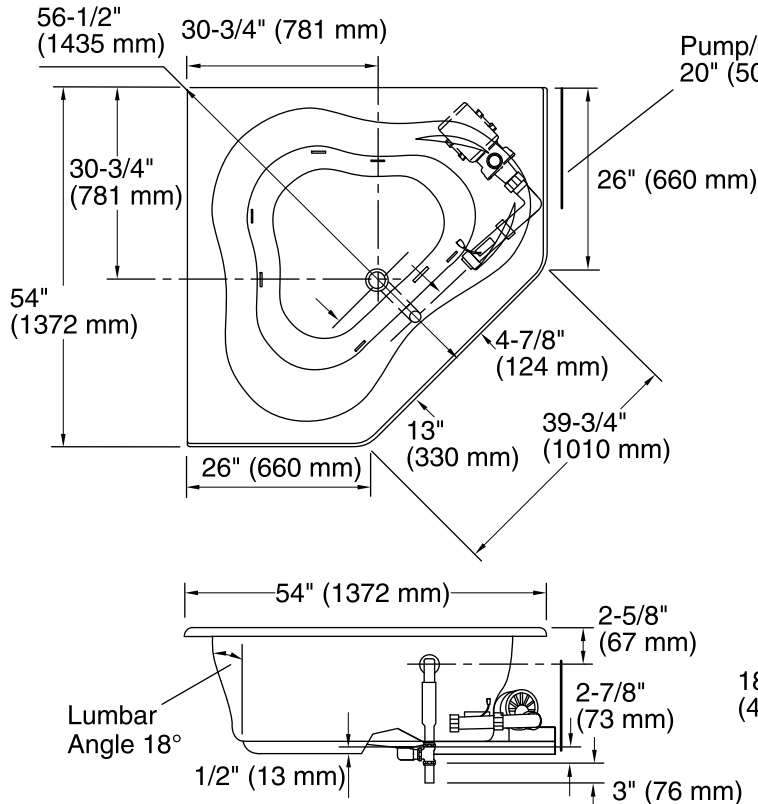

**Drop-in Rim Detail**

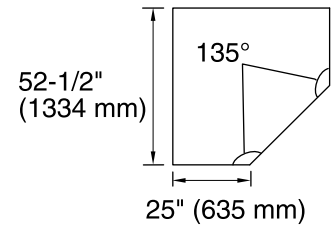

**Cut-out Detail  
Drop-in Rim Style**

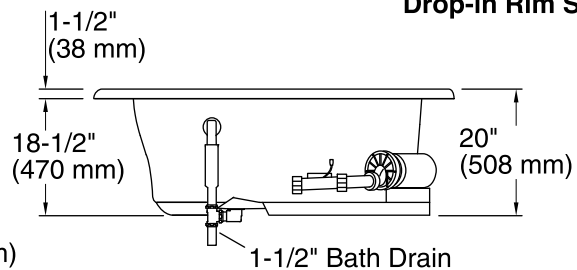

1-1/2" Bath Drain

### Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

Pump: 120 V, 15 A, 60 Hz

### Technical Information

All product dimensions are nominal.

Installation:	Drop-in, Corner
Drain location:	Center
Basin area, bottom:	44" x 36" (1118 mm x 914 mm)
Basin area, top:	56" x 43" (1422 mm x 1092 mm)
Weight:	65 lbs (29.5 kg)
Minimum floor load:	36 lbs/ft <sup>2</sup> (175.8 kg/m <sup>2</sup> )
Water depth:	15" (381 mm)
Water capacity:	76 gal (287.7 L)
Electrical component rating:	Pump: 120 V, 7.5 A, 60 Hz
Pump speed:	Single

### Notes

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.