

Features

- Single-speed whirlpool offers performance and value, with 6 fully adjustable jets. .
- Hydromassage flow and direction can be controlled at each jet.
- Corner layout minimizes footprint without compromising bathing area.
- Spacious design accommodates up to two bathers.
- Molded lumbar supports and armrests offer extra comfort while bathing.
- Integral apron.
- Integral flange helps prevent water from seeping behind wall and simplifies alcove installation.
- Center drain.

Material

- Acrylic

Hydrotherapy

- Whirlpool

Installation

- Corner alcove.

Additional Hydrotherapy Options

- Soaking Bath - K-1161-LA
- Whirlpool - K-1160-LA
- Whirlpool + heater - K-1160-HL

Recommended Products/Accessories

K-11677 Bath Drain
K-1491 Bath/Whirlpool Pillow
K-1601 Bath/Whirlpool Footstop
K-7259 Clearflo Bath Drain
K-37382 45" Rough-in Cable Bath Drain



Codes/Standards

ASME A112.19.7/CSA B45.10
CSA B45.5/IAPMO Z124
UL 1795



**KOHLER® Plastic Baths and Receptors
Lifetime Limited Warranty
KOHLER® Hydrotherapy Components
Five-Year Limited Warranty**


See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.


| Color | Code | Description |
|-------|------|-------------|
|-------|------|-------------|

| | | |
|--|----|---------|
|  | 0 | White |
|  | 96 | Biscuit |

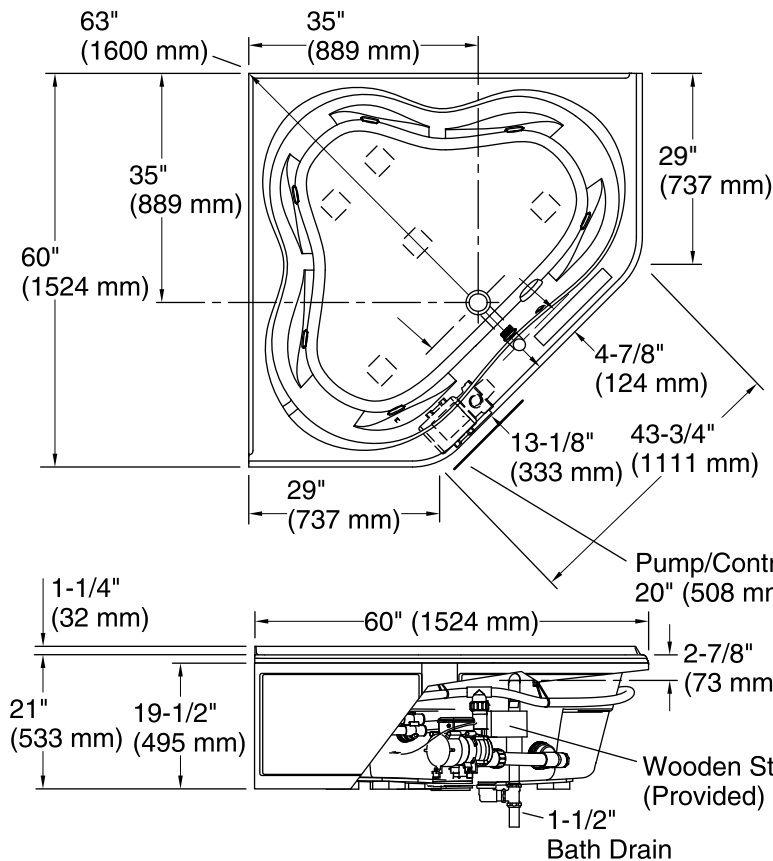


No change in measurements if connected with drain illustrated. (K-11677)

Recommended Faucet Location



Tile Flange Detail

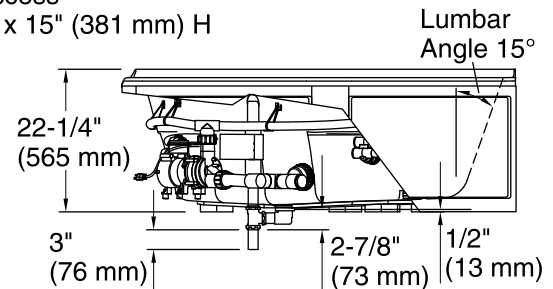

Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

Pump, Heater: 120 V, 15 A, 60 Hz

Technical Information

All product dimensions are nominal.

| | |
|------------------------------|---|
| Installation: | Corner |
| Drain location: | Center |
| Basin area, bottom: | 52" x 38-3/4" (1321 mm x 984 mm) |
| Basin area, top: | 61" x 46-1/4" (1549 mm x 1175 mm) |
| Weight: | 151 lbs (68.5 kg) |
| Minimum floor load: | 39 lbs/ft ² (190.4 kg/m ²) |
| Water depth: | 15" (381 mm) |
| Water capacity: | 96 gal (363.4 L) |
| Electrical component rating: | Pump: 120 V, 7.5 A, 60 Hz Heater: 120 V, 12.5 A, 60 Hz, 1500 W |
| Pump speed: | Single |

Notes

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Provide one grounded electrical outlet within 24" (610 mm) of each component.

If installing a rim-mount faucet, make sure there is no interference above or below the deck before drilling any holes.