Memoirs®



66" x 42" drop-in Heated BubbleMassage™ air bath with Bask® heated surface K-1170-GHW

Features

- 122 airjets release thousands of heated bubbles that surround, support, and massage the body
- Variable-speed blower lets you adjust massage intensity to 18 levels
- Bask® heated surface creates spa-like relaxation with soothing warmth on your back, shoulders, and neck
- Built-in heater
- Automatic and manual purge cycles remove residual water from air channels after use
- 60-minute automatic shutoff timer
- Spacious design accommodates up to two bathers
- Integral lumbar support
- Keypad control
- Textured bottom surface
- Coordinates with other products in the Memoirs collection

Material

Acrylic

Technology

 Heated BubbleMassage™ technology warms and humidifies air before it enters the bath

Installation

- Drop-in
- Rear center drain

Required Products/Accessories

K-11677 Bath Drain

or

K-T37391 Rotary-turn bath drain trim K-T37392 Rotary-turn bath drain trim

or

K-37383 Rough-in cable bath drain, PVC, 30" cable with tubing

K-78438 30" cable bath drain

٥r

K-37385 rough-in cable drain, PVC, 45" cable K-78439 45" cable bath drain

Recommended Products/Accessories

K-1446 Remote Installation Kit

K-1491 Bath/Whirlpool Pillow

K-1601 Bath/whirlpool footstop, removable

K-7213 27" Cable Bath Drain

K-7214 27" Cable Bath Drain

K-7259 Brass toe tap bath drain

K-1177 Vinyl Tiling-in Bead



Codes/Standards

ASME A112.19.7/CSA B45.10 CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662 UL 1795 CSA C22.2 No. 218.2 cUL Listed UL Listed

KOHLER® Plastic Baths and Shower Bases Lifetime Limited WarrantyKOHLER® Hydrotherapy Components Five-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
	0	White
	06	Ricouit




Memoirs®



66" x 42" drop-in Heated BubbleMassage™ air bath with Bask® heated surface

K-1170-GHW

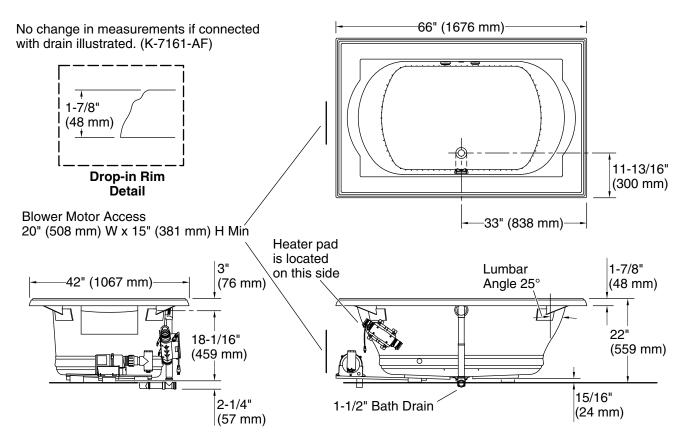

Required Electrical Service

Two dedicated circuits required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

Blower, Heated 120 V, 15 A, 60 Hz

Surface:

Air bath: 120 V, 15 A, 60 Hz

Technical Information

All product dimensions are nominal.

Drain location: Center

Basin area, bottom: 42" x 27" (1067 mm x 686 mm) Basin area, top: 54" x 30" (1372 mm x 762 mm)

Weight: 156 lbs (70.8 kg)

Minimum floor load: 44 lbs/ft² (214.8 kg/m²)

Water depth: 16" (406 mm)
Water capacity: 81 gal (306.6 L)

Electrical component Blower: 120 V, 10 A, 60 Hz

rating: Heated Surface: 120 V, 0.5 A, 60 Hz

Air bath: 120 V, 5 A, 60 Hz

Minimum flat for 3-13/16" (97 mm)

1-800-4KOHLER (1-800-456-4537)

Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

