



66" x 36" drop-in Heated BubbleMassage™ air bath with whirlpool

K-1173-XHGH

Features

- 122 airjets release thousands of heated bubbles that surround, support, and massage the body
- Variable-speed blower lets you adjust massage intensity to 18 levels
- Eight Proflex® hydromassage jets can be individually adjusted for water flow and direction
- Single-speed whirlpool offers performance and value with 8 fully adjustable jets
- Built-in heater
- Automatic and manual purge cycles remove residual water from air channels after use
- 60-minute automatic shutoff timer
- Slotted overflow allows for deep soaking
- Spacious design accommodates up to two bathers
- Integral lumbar support
- Keypad control
- Textured bottom surface

Material

Acrylic

Technology

 Heated BubbleMassage™ technology warms and humidifies air before it enters the bath

Installation

- Drop-in or undermount
- Reversible drain
- 120 V electrical requirement allows for easy installation with standard outlet
- Requires three dedicated circuits

Required Products/Accessories

K-7271 Brass Slotted Overflow Bath Drain

or

K-7272 PVC Slotted Overflow Bath Drain

Recommended Products/Accessories

K-591 Under-Mount Installation Kit

K-1491 Bath/Whirlpool Pillow

K-1601 Bath/whirlpool footstop, removable

K-706000-D3 Frameless Sliding Bath Door

K-706000-L 62" H sliding bath door with 1/4"-thick glass

K-706004-D3 Frameless Sliding Bath Door

K-706004-L Frameless Sliding Bath Door



Codes/Standards

ASME A112.19.7/CSA B45.10 CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662 UL 1795 CSA C22.2 No. 218.2 cUL Listed UL Listed

KOHLER® Plastic Baths and Shower Bases Lifetime Limited WarrantyKOHLER® Hydrotherapy Components Five-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	NY	Dune
	95	Ice™ Grey
	58	Thunder™ Grey
	7	Black Black™






Underscore®

66" x 36" drop-in Heated BubbleMassage™ air bath with whirlpool

K-1173-XHGH

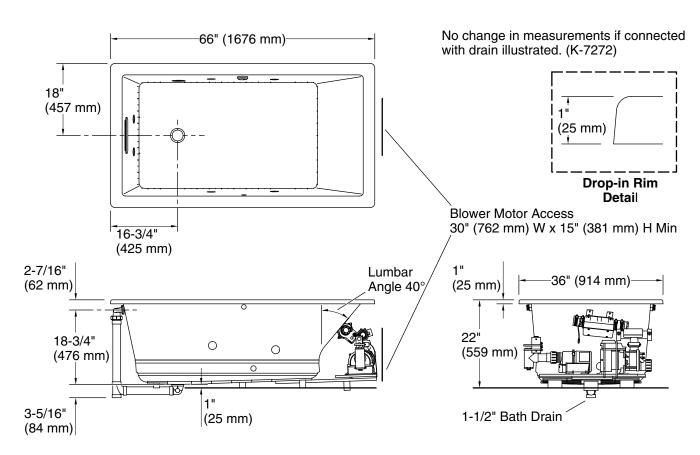

Required Electrical Service

Three dedicated circuits required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

Blower: 120 V, 15 A, 60 Hz Air bath, Pump: 120 V, 15 A, 60 Hz 120 V, 15 A, 60 Hz Heater:

Technical Information

All product dimensions are nominal. Drain location: Reversible

44-1/2" x 26-1/2" (1130 mm x 673 mm) Basin area, bottom: 60-1/4" x 30-1/4" (1530 mm x 768 mm) Basin area, top:

Weight: 182 lbs (82.6 kg)

Minimum floor load: 62.5 lbs/ft² (305.2 kg/m²)

Water depth: 17-3/4" (450 mm) Water capacity: 102 gal (386.1 L)

Drop-in, 65-1/2" x 35-1/2" (1664 mm x Cutout:

902 mm)

Electrical component Blower: 120 V, 10 A, 60 Hz Air bath: 120 V. 5 A. 60 Hz ratina:

Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

