



72" x 36" alcove bath, right drain K-1259-R

#### **Features**

- 72"L x 36"W x 20"H
- Designed for quick and easy installation
- Includes integral flange to simplify installation and prevent the possibility of water damage behind the wall
- Textured bottom surface

### Material

Acrylic

## Installation

Alcove

# **Required Products/Accessories**

K-T37391 Rotary-turn bath drain trim K-T37392 Rotary-turn bath drain trim

or

K-37383 Rough-in cable bath drain, PVC, 30" cable with tubing  $\,$ 

K-78438 30" cable bath drain

#### **Recommended Products/Accessories**

K-1491 Bath/Whirlpool Pillow

K-1601 Bath/whirlpool footstop, removable

K-7213 27" Cable Bath Drain

K-7214 27" Cable Bath Drain

K-7259 Brass toe tap bath drain

K-23726 Drain treatment

K-7265 Brass toe tap bath drain



## Codes/Standards

CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662

# KOHLER® Plastic Baths and Shower Bases Lifetime Limited Warranty

See website for detailed warranty information.

### **Available Colors/Finishes**

Color tiles intended for reference only.

Color Code Description

0 White










72" x 36" alcove bath, right drain K-1259-R


No change in measurements if connected with drain illustrated. (K-7166-AF)

**Recommended Faucet Location** 



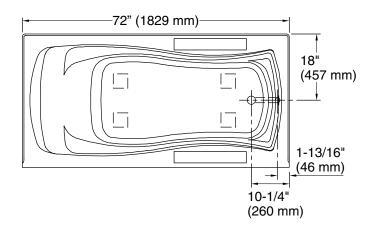



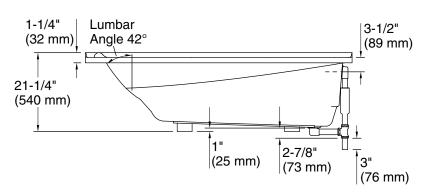

## **Technical Information**

All product dimensions are nominal.

**Drain location:** Right

Basin area, bottom: 50" x 24" (1270 mm x 610 mm) 65" x 27" (1651 mm x 686 mm) Basin area, top:

Weight: 77 lbs (34.9 kg)

Minimum floor load: 39 lbs/ft<sup>2</sup> (190.4 kg/m<sup>2</sup>)

Water depth: 14" (356 mm) Water capacity: 72 gal (272.5 L) Minimum flat for 2-1/8" (54 mm)

door:

#### **Notes**

Measure your actual product for rough-in

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

If installing a rim-mount faucet, make sure there is no interference above or below the deck

