



60" x 32" drop-in whirlpool bath heater K-1357-H

### **Features**

- Single-speed whirlpool offers performance and value with 8 fully adjustable jets
- Hydromassage flow and direction can be controlled at each jet
- Built-in heater
- Integral lumbar support and armrests offer extra comfort while bathing
- Textured bottom surface
- Coordinates with other products in the Devonshire collection

### Material

Acrylic

# **Hydrotherapy**

Whirlpool

### Installation

- Reversible drain
- Drop-in

# **Required Products/Accessories**

K-T37391 Rotary-turn bath drain trim K-T37392 Rotary-turn bath drain trim

or

K-37383 Rough-in cable bath drain, PVC, 30" cable with tubing

K-78438 30" cable bath drain

or

K-37385 rough-in cable drain, PVC, 45" cable K-78439 45" cable bath drain

## **Recommended Products/Accessories**

K-1491 Bath/Whirlpool Pillow

K-1601 Bath/whirlpool footstop, removable

K-7213 27" Cable Bath Drain

K-7214 27" Cable Bath Drain

K-7259 Brass toe tap bath drain

K-1177 Vinyl Tiling-in Bead

K-23726 Drain treatment



## Codes/Standards

ASME A112.19.7/CSA B45.10 CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662 UL 1795 CSA C22.2 No. 218.2 UL Listed

# KOHLER® Plastic Baths and Shower Bases Lifetime Limited WarrantyKOHLER® Hydrotherapy Components Five-Year Limited Warranty

See website for detailed warranty information.

## **Available Colors/Finishes**

Color tiles intended for reference only.

**Color Code Description** 


0 White







60" x 32" drop-in whirlpool bath heater K-1357-H

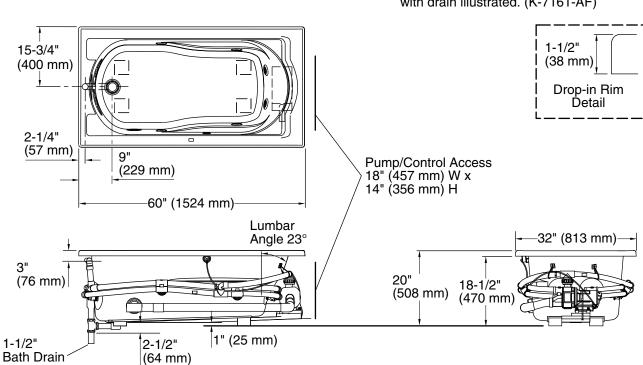

# **Required Electrical Service**

Two dedicated circuits required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

Pump: 120 V, 15 A, 60 Hz Heater: 120 V, 15 A, 60 Hz

## **Technical Information**

All product dimensions are nominal.

Drain location: Reversible

42" x 20" (1067 mm x 508 mm) Basin area, bottom: 51" x 24" (1295 mm x 610 mm) Basin area, top:

Weight: 145 lbs (65.8 kg) Minimum floor load: 50 lbs/ft2 (244.1 kg/m2)

Water depth: 14" (356 mm) Water capacity: 60 gal (227.1 L)

Drop-in, 58" x 30" (1473 mm x 762 mm) Cutout:

Electrical component Pump: 120 V, 7 A, 60 Hz

Heater: 120 V, 12.5 A, 60 Hz, 1500 W rating:

Pump speed: Single

# 1-800-4KOHLER (1-800-456-4537)

## Kohler Co. reserves the right to make revisions without notice to product specifications. For the most current Specification Sheet, go to www.kohler.com USA or www.kohler.ca Canada 9-18-2025 20:47 - US/CA

# THE BOLD LOOK OF **KOHLER**

No change in measurements if connected with drain illustrated. (K-7161-AF)

**Notes** Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.