

Features

- 122 airjets release thousands of bubbles that surround, support, and massage the body.
- Variable-speed blower lets you adjust massage intensity.
- Zones of Control feature allows you to target massage to back, midsection, or feet.
- Spacious design accommodates up to two bathers.
- Molded lumbar support and armrests offer extra comfort while bathing.
- Center drain.
- Coordinates with other products in the Portrait collection.

Material

- Acrylic

Hydrotherapy

- BubbleMassage

Installation

- Drop-in

Additional Hydrotherapy Options

- Soaking Bath - 1454-0
- BubbleMassage air bath - 1457-G
- BubbleMassage air bath + Bask heated surface - 1457-GCR
- Effervescence Relax Package - 1457-CT
- Effervescence Spa Package - 1457-AH
- Whirlpool Massage Package - 1457-LM
- Spa Package + Massage Package - 1457-LV

Recommended Products/Accessories

K-1705 Whirlpool/BubbleMassage™ Remote Control
K-7161-AF Bath Drain
K-9498 3" Keypad Trim
K-24916 Wireless Music Kit
K-7265 Clearflo Bath Drain



Codes/Standards

ASME A112.19.7/CSA B45.10
CSA B45.5/IAPMO Z124
ASTM E162
ASTM E662
UL 1795
CSA C22.2 No. 218.2




**KOHLER® Plastic Baths and Receptors
Lifetime Limited Warranty
KOHLER® Hydrotherapy Components
Five-Year Limited Warranty**

See website for detailed warranty information.

Available Colors/Finishes


Color tiles intended for reference only.

Color	Code	Description
-------	------	-------------

	0	White
	96	Biscuit
	47	Almond

No change in measurements if connected with drain illustrated. (K-7161-AF)

□ Recommended Faucet Location

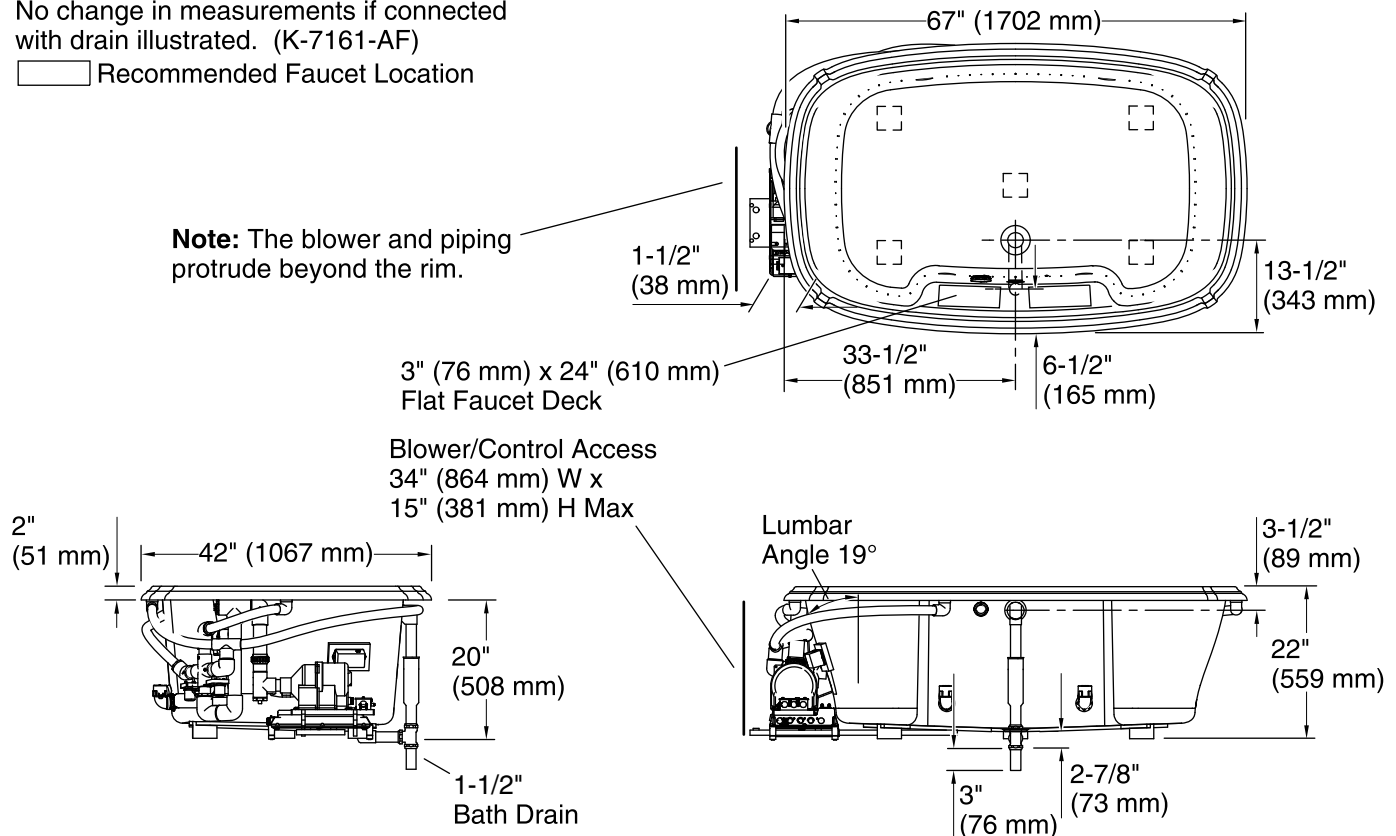

Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

Amplifier: 240 V, 15 A, 50/60 Hz

Technical Information

All product dimensions are nominal.

Installation: Drop-in
 Drain location: Center
 Basin area, bottom: 50" x 29" (1270 mm x 737 mm)
 Basin area, top: 61" x 32" (1549 mm x 813 mm)
 Weight: 128 lbs (58.1 kg)
 Minimum floor load: 51 lbs/ft² (249 kg/m²)
 Water depth: 16" (406 mm)
 Water capacity: 100 gal (378.5 L)
 Template: Drop-in, 113311-7, required, included
 Electrical component rating: Amplifier: 240 V, 5 A, 50/60 Hz

Notes

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

If relocating the blower motor, do not relocate or alter the PVC tee or coiled flexible tubing connected to the blower. Follow the blower relocation instructions exactly. Provide access for servicing the blower.

If installing a rim-mount faucet, make sure there is no interference above or below the deck before drilling any holes.