

### Features

- 5-5/16" (135 mm) spout reach.
- 1.2 gpm (gallons per minute) flow rate.
- Includes touch-activated drain with 1-1/4" tailpiece and overflow.
- Coordinates with Stance faucets and accessories.

### Material

- Premium Metal Construction
- KOHLER finishes resist corrosion and tarnishing.

### Installation

- Bath- or deck-mount.
- Single-handle sink faucet for single-hole installation
- Pre-attached flexible supply lines simplify installation



ADA

CSA B651

OBC

### Codes/Standards

ASME A112.18.1/CSA B125.1

NSF/ANSI 61

NSF/ANSI 372

All applicable US Federal and State material regulations

DOE - Energy Policy Act 1992

EPA WaterSense®

California Energy Commission (CEC)

ADA

ICC/ANSI A117.1

CSA B651

OBC

### KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*


Color	Code	Description
-------	------	-------------



CP Polished Chrome



BN Vibrant® Brushed Nickel

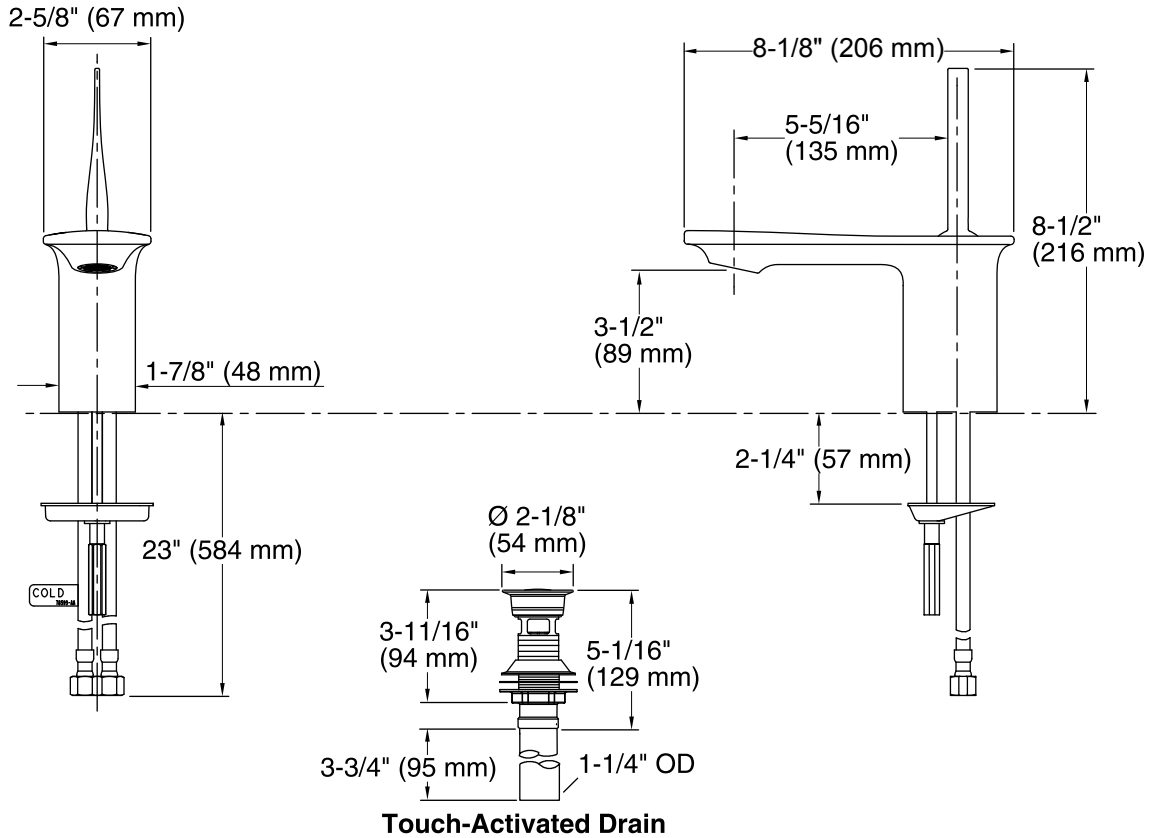

### Technical Information

All product dimensions are nominal.

#### Faucet:

Flow rate: 1.2 gal/min (4.5 l/min)  
Pressure: 60 psi (4.1 bar)

Drain included: Yes

Drain with overflow: Yes

Drain tailpiece included: Yes

#### Spout:

Spout reach: 5-5/16" (135 mm)

### Notes

Install this product according to the installation guide.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.