

# Coralais® Kitchen Sink Faucet K-15172-F

### **Features**

- Metal construction.
- One-piece, self-contained ceramic disc valve allows both volume and temperature control.
- Temperature memory allows faucet to be turned on and off at any temperature setting.
- 8-1/2" (216 mm) swing spout reach.
- Flexible supplies.
- Matching finish sidespray.
- 1.5 gal/min (5.7 l/min) maximum flow rate [max at 60 psi (4.14 bar)].

## **Optional Products/Accessories**

1030920 Side Spray Deep Rough-In 1160594 .35 gpm Aerator, Large



ADA CSA B651

### Codes/Standards

ASME A112.18.1/CSA B125.1 NSF/ANSI 61 NSF/ANSI 372 All applicable US Federal and State material regulations DOE - Energy Policy Act 1992 ADA ICC/ANSI A117.1 CSA B651

# KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

## **Available Colors/Finishes**


Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	G	Brushed Chrome
	BN	Vibrant® Brushed Nickel





# Coralais® Kitchen Sink Faucet K-15172-F

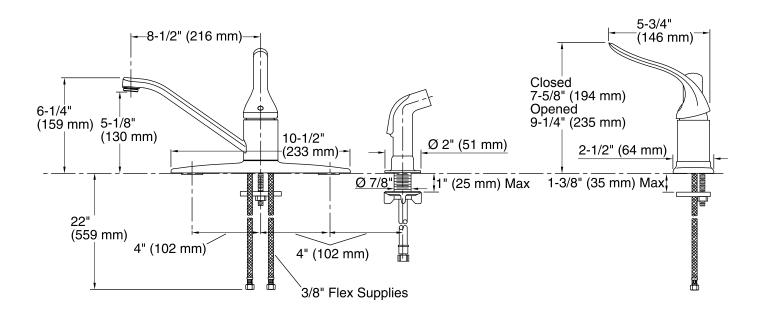

### **Technical Information**

All product dimensions are nominal.

Faucet:

Flow rate: 1.5 gal/min (5.7 l/min)

Pressure: 60 psi (4.1 bar)

Spout:

Spout reach: 8-1/2" (216 mm)

### **Notes**

Install this product according to the installation guide.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

