



66" x 32" drop-in bath **K-1821** 

### **Features**

- Integral lumbar support
- Slotted overflow allows for deep soaking

# Material

Acrylic

### Installation

- Requires K-7271 or K-7272 Clearflo slotted overflow bath drain (sold separately)
- Drop-in or undermount

# **Required Products/Accessories**

K-7271 Brass Slotted Overflow Bath Drain

or

K-7272 PVC Slotted Overflow Bath Drain

## **Recommended Products/Accessories**

K-550 Under-Mount Installation Kit K-1491 Bath/Whirlpool Pillow K-1601 Bath/whirlpool footstop, removable K-1177 Vinyl Tiling-in Bead K-23726 Drain treatment



## Codes/Standards

CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662 UL 1795 CSA C22.2 No. 218.2 UL Listed

# **KOHLER® Plastic Baths and Shower Bases Lifetime Limited Warranty**

See website for detailed warranty information.

### **Available Colors/Finishes**

Color tiles intended for reference only.


Color	Code	Description
	0	White
	96	Biscuit
	95	Ice™ Grey
	7	Black Black™







# **KOHLER**®


66" x 32" drop-in bath **K-1821** 

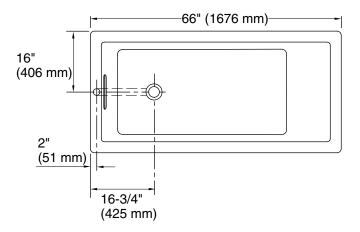

No change in measurement if connected with drain illustrated. (K-7272)



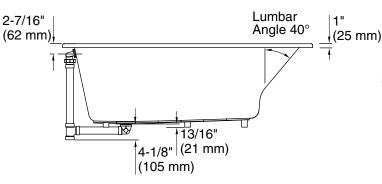



## **Technical Information**

All product dimensions are nominal.

Drain location: Reversible

Basin area, bottom: 44-1/2" x 22-5/16" (1130 mm x 567 mm)

Basin area, top: 59-5/8" x 25-1/2" (1514 mm x 648 mm)

Weight: 86 lbs (39 kg)

Minimum floor load: 50 lbs/ft<sup>2</sup> (244.1 kg/m<sup>2</sup>)

Water depth: 18" (457 mm)
Water capacity: 85.8 gal (324.8 L)

Cutout: Drop-in, 64-1/2" x 30-1/2" (1638 mm x

775 mm)

Minimum flat for 2-7/16" (61 mm)

door:

### **Notes**

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

ary.

Kit is required for under-mount installations

(sold separately).

