



66" x 32" drop-in Heated BubbleMassage™ air bath with Bask® heated surface K-1822-GHW

#### **Features**

- 122 airjets release thousands of heated bubbles that surround, support, and massage the body
- Variable-speed blower lets you adjust massage intensity to 18 levels
- Bask® heated surface creates spa-like relaxation with soothing warmth on your back, shoulders, and neck
- Built-in heater
- Automatic and manual purge cycles remove residual water from air channels after use
- 60-minute automatic shutoff timer
- Slotted overflow allows for deep soaking
- Spacious design accommodates up to two bathers
- Integral lumbar support
- Keypad control
- Textured bottom surface
- Bask® heated surface creates spa-like relaxation with soothing warmth on your back, shoulders, and neck

### Material

Acrylic

# **Technology**

 Heated BubbleMassage™ technology warms and humidifies air before it enters the bath

#### Installation

- Drop-in or undermount
- Reversible drain

### **Required Products/Accessories**

K-7271 Brass Slotted Overflow Bath Drain

or

K-7272 PVC Slotted Overflow Bath Drain

### **Recommended Products/Accessories**

K-1491 Bath/Whirlpool Pillow

K-1601 Bath/whirlpool footstop, removable

K-706000-D3 Frameless Sliding Bath Door

K-706000-L 62" H sliding bath door with 1/4"-thick glass

K-706004-D3 Frameless Sliding Bath Door

K-706004-L Frameless Sliding Bath Door

K-1177 Vinyl Tiling-in Bead

K-550 Under-Mount Installation Kit



### Codes/Standards

ASME A112.19.7/CSA B45.10 CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662 UL 1795 CSA C22.2 No. 218.2 cUL Listed UL Listed

# KOHLER® Plastic Baths and Shower Bases Lifetime Limited WarrantyKOHLER® Hydrotherapy Components Five-Year Limited Warranty

See website for detailed warranty information.

### **Available Colors/Finishes**

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	NY	Dune
	95	Ice™ Grey
	7	Black Black™






# **Underscore®**

66" x 32" drop-in Heated BubbleMassage™ air bath with Bask® heated surface

K-1822-GHW

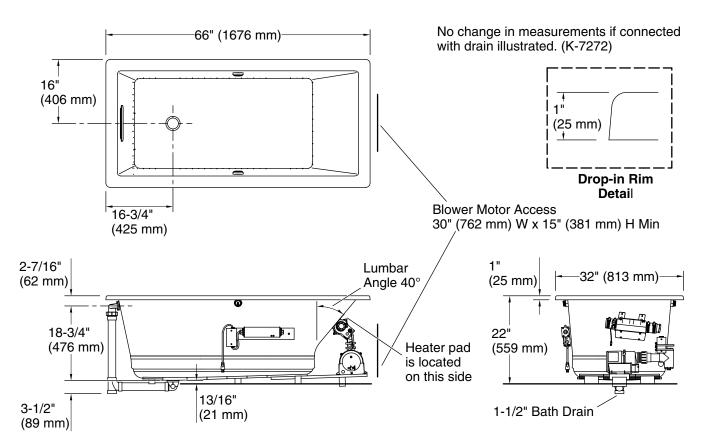

# **Required Electrical Service**

Two dedicated circuits required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

Blower, Heated 120 V, 15 A, 60 Hz

Surface:

Air bath: 120 V, 15 A, 60 Hz

## **Technical Information**

All product dimensions are nominal.

**Drain location:** Reversible

44-1/2" x 22-5/16" (1130 mm x 567 mm) Basin area, bottom: 59-5/8" x 25-1/2" (1514 mm x 648 mm) Basin area, top:

Weight: 119 lbs (54 kg)

Minimum floor load: 50 lbs/ft<sup>2</sup> (244.1 kg/m<sup>2</sup>)

Water depth: 18" (457 mm) Water capacity: 85.8 gal (324.8 L)

Drop-in, 64-1/2" x 30-1/2" (1638 mm x Cutout:

775 mm)

Electrical component Blower: 120 V, 10 A, 60 Hz

Heated Surface: 120 V, 0.5 A, 60 Hz, 65 rating:

## 1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications. For the most current Specification Sheet, go to www.kohler.com USA or www.kohler.ca Canada 9-18-2025 21:11 - US/CA

## **Notes**

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

