

Underscore®

60" x 30" alcove bath, left drain **K-1956-LA**

Features

- Integral lumbar support
- Slotted overflow allows for deep soaking
- Integral apron creates a clean, finished look
- Integral flange helps prevent water from seeping behind wall and simplifies alcove installation
- Textured bottom surface

Material

Acrylic

Installation

- Left drain
- Requires K-7271 or K-7272 Clearflo slotted overflow bath drain (sold separately)
- Alcove

Required Products/Accessories

K-7271 Brass Slotted Overflow Bath Drain

or

K-7272 PVC Slotted Overflow Bath Drain

Recommended Products/Accessories

K-23726 Drain treatment



Codes/Standards

CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662

KOHLER® Plastic Baths and Shower Bases Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.


Color	Code	Description
	0	White
	96	Biscuit
	95	Ice™ Grey
	7	Black Black™







Underscore®


60" x 30" alcove bath, left drain **K-1956-LA**



No change in measurements if connected with drain illustrated. (K-7272)



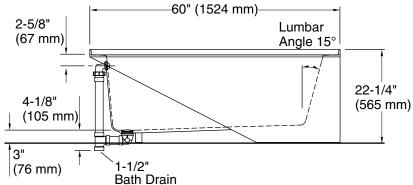



Technical Information

All product dimensions are nominal.

Drain location: Left

Basin area, bottom: 46-1/4" x 22" (1175 mm x 559 mm)

Basin area, top: 52" x 24" (1321 mm x 610 mm)

Weight: 105 lbs (47.6 kg)

Minimum floor load: 56 lbs/ft² (273.4 kg/m²)

Water depth: 15-1/2" (394 mm)
Water capacity: 68 gal (257.4 L)
Minimum flat for 2-13/16" (72 mm)

door:

Notes

Measure your actual product for rough-in

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will

vary.

