



Brenham™
Wall-mount Bathroom Sink With Shroud
K-1999-8N

Features

- 8" (203 mm) widespread faucet holes
- Oval basin
- Sealed overflow
- Includes wall hanger
- Combination consists of the K-1997-8N basin and the K-1998 shroud

Material

- Vitreous china

Installation

- Wall-mount
- Drilled for concealed arm carrier installation

Recommended Products/Accessories

K-23726 Drain treatment
K-23725 Cast iron cleaner

Optional Products/Accessories

K-8998 P-Trap

Included Components

K-1997-8N Wall-Mount Bathroom Sink
K-1998 Shroud



ADA **CSA B651** **OBC**

Codes/Standards

ASME A112.19.2/CSA B45.1
ADA
ICC/ANSI A117.1
CSA B651
OBC

KOHLER® Vitreous China Bathroom Sink Lifetime Limited Warranty


See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description

 0 White

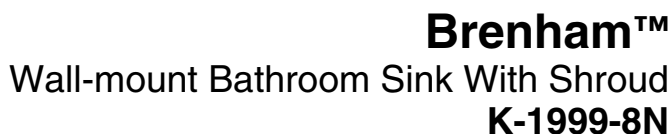

Technical drawing of the 1000 Series Locking Device, showing top and side views with dimensions in inches and millimeters.

Top View Dimensions:

- Overall width: 18-5/16" (465 mm)
- Overall height: 19-3/4"
- Distance from top edge to center of locking device holes: 7-15/16" (202 mm)
- Distance from top edge to leveling screw hole: 13-13/16" (351 mm)
- Distance from top edge to hot/cold water inlet: 8-9/16" (217 mm)
- Distance from top edge to hot/cold water inlet: 3-5/16" (84 mm)
- Distance from center of leveling screw hole to center of locking device holes: Ø 1-1/4" (32 mm)
- Distance from center of leveling screw hole to center of locking device holes: Leveling Screw Hole
- Distance from center of leveling screw hole to center of locking device holes: Ø 1-3/16" (30 mm)
- Distance from center of leveling screw hole to center of locking device holes: Locking Device Holes

Side View Dimensions:

- Overall height: 31" (787 mm)
- Distance from top edge to center of leveling screw hole: 9-1/16" (14 mm)
- Distance from top edge to center of leveling screw hole: 4" (102 mm)
- Distance from top edge to center of leveling screw hole: 6" (152 mm)
- Distance from top edge to center of leveling screw hole: 9-1/4" (235 mm)
- Distance from top edge to center of leveling screw hole: 2-5/8" (67 mm)
- Distance from top edge to center of leveling screw hole: 6-1/2" (165 mm)
- Distance from top edge to center of leveling screw hole: 29-1/8" (740 mm)
- Distance from top edge to center of leveling screw hole: 9-3/4" (248 mm)
- Distance from top edge to center of leveling screw hole: 7-3/4" (197 mm)
- Distance from top edge to center of leveling screw hole: 28-1/2" (724 mm)
- Distance from top edge to center of leveling screw hole: 3-1/2" (89 mm)
- Distance from top edge to center of leveling screw hole: 1-1/4" OD
- Distance from top edge to center of leveling screw hole: 3/8" Cold
- Distance from top edge to center of leveling screw hole: 3/8" Hot
- Distance from top edge to center of leveling screw hole: Ø 5/16" (8 mm) Hole in brackets
- Distance from top edge to center of leveling screw hole: 4" (102 mm)

Recommended ADA/TAS Installation

	ADA and TAS	Children's Environment
		ADA and TAS Ages 6-12 yrs
A	34" (864 mm)	31" (787 mm)
B	27" (686 mm)	24" (610 mm)
C	11" (279 mm)	11" (279 mm)
D	9" (229 mm)	9-1/16" (230 mm)
E	8" (203 mm)	8" (203 mm)

Basin configuration:	Single Bowl
Center(s):	8" (203 mm)
Bowl area:	Length: 14-3/8" (365 mm) Width: 12-5/16" (313 mm) Water depth: 3-1/4" (83 mm)
With overflow:	No
Number of deck holes:	3
Faucet hole(s):	1-3/8" (35 mm)
Drain hole:	1-3/4" (44 mm)

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.