



Brenham™

Wall-mount Bathroom Lavatory With Shroud

K-1999-SS4

Features

- Antimicrobial finish inhibits the growth of mold-, mildew-, stain-, and odor-causing bacteria on the fixture surface. This product does not protect users against bacteria, viruses, or other disease organisms. Always clean and wash this product thoroughly before and after each use
- Ideal for healthcare and education installations
- 4" (102 mm) centerset faucet holes
- Oval basin
- Overflow drain
- Includes wall hanger
- Combination consists of the K-1997-SS4 basin and the K-1998-SS shroud

Material

- Vitreous china

Installation

- Wall-mount
- Drilled for concealed arm carrier installation

Recommended Products/Accessories

K-23726 Drain treatment
K-23725 Cast iron cleaner

Optional Products/Accessories

K-8998 P-Trap

Included Components

K-1997-SS4 Wall-Mount Bathroom Lavatory
K-1998-SS Shroud



ADA	CSA B651	OBC
-----	----------	-----

Codes/Standards

ASME A112.19.2/CSA B45.1
ADA
ICC/ANSI A117.1
CSA B651
OBC

KOHLER® Vitreous China Bathroom Sink Lifetime Limited Warranty


See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
-------	------	-------------

	0	White
---	---	-------

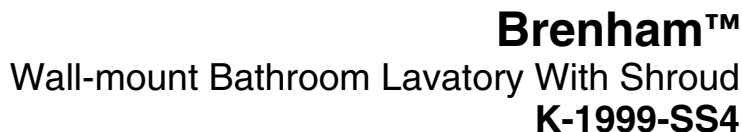

Top View Dimensions:

- Overall Width: 18-5/16" (465 mm)
- Overall Height: 19-3/4" (502 mm)
- Distance from top edge to top of locking device: 2-11/16" (68 mm)
- Distance from top edge to center of leveling screw hole: 8-9/16" (217 mm)
- Distance from top edge to center of locking device hole: 7-15/16" (202 mm)
- Distance from left edge to center of leveling screw hole: 13-13/16" (351 mm)
- Distance from left edge to center of locking device hole: 3-5/16" (84 mm)
- Leveling Screw Hole: Ø 1-1/4" (32 mm)
- Locking Device Holes: Ø 1-3/16" (30 mm)

Side View Dimensions:

- Overall Depth: 29-1/8" (740 mm)
- Distance from front face to center of leveling screw hole: 9-1/4" (235 mm)
- Distance from front face to center of locking device hole: 6-1/2" (165 mm)
- Distance from front face to center of leveling screw hole (bottom): 31" (787 mm)
- Distance from front face to center of locking device hole (bottom): 28-1/2" (724 mm)
- Distance from front face to top of leveling screw hole: 4" (102 mm)
- Distance from front face to top of locking device hole: 9-3/4" (248 mm)
- Distance from front face to top of leveling screw hole (bottom): 6" (152 mm)
- Distance from front face to top of locking device hole (bottom): 3-1/2" (89 mm)
- Hot Water Connection: 3/8" Hot
- Cold Water Connection: 3/8" Cold
- Overall Diameter of Hot Water Connection: 1-1/4" OD
- Hole in brackets: Ø 5/16" (8 mm)
- Distance from front face to bottom of leveling screw hole: 4" (102 mm)

	ADA and TAS	Children's Environment ADA and TAS Ages 6-12 yrs
A	34" (864 mm)	31" (787 mm)
B	27" (686 mm)	24" (610 mm)
C	11" (279 mm)	11-1/16" (281 mm)
D	9" (229 mm)	9-1/16" (230 mm)
E	8" (203 mm)	8-1/16" (205 mm)

Drain hole: 1-3/4" (44 mm)

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.