



Brenham™

Wall-mount Bathroom Lavatory With Shroud

K-1999-SS8

Features

- Antimicrobial finish inhibits the growth of mold-, mildew-, stain-, and odor-causing bacteria on the fixture surface. This product does not protect users against bacteria, viruses, or other disease organisms. Always clean and wash this product thoroughly before and after each use
- Ideal for healthcare and education installations
- 8" (203 mm) widespread faucet holes
- Oval basin
- Overflow drain
- Includes wall hanger
- Combination consists of the K-1997-SS8 basin and the K-1998-SS shroud

Material

- Vitreous china

Installation

- Wall-mount
- Drilled for concealed arm carrier installation

Recommended Products/Accessories

K-23726 Drain treatment
K-23725 Cast iron cleaner

Optional Products/Accessories

K-8998 P-Trap

Included Components

K-1997-SS8 Wall-Mount Bathroom Lavatory
K-1998-SS Shroud



ADA

CSA B651

OBC

Codes/Standards

ASME A112.19.2/CSA B45.1
ADA
ICC/ANSI A117.1
CSA B651
OBC

KOHLER® Vitreous China Bathroom Sink Lifetime Limited Warranty


See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description

	0	White
---	---	-------

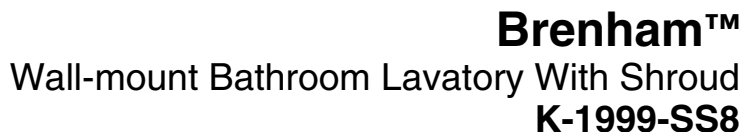

Technical drawing of the 1000 Series Locking Device, showing top and side views with dimensions in inches and millimeters.

Top View Dimensions:

- Overall Width: 18-5/16" (465 mm)
- Overall Height: 19-3/4" (502 mm)
- Distance from top edge to center of locking device holes: 7-15/16" (202 mm)
- Distance from top edge to leveling screw hole: 8-9/16" (217 mm)
- Distance between leveling screw holes: 3-5/16" (84 mm)
- Leveling Screw Hole: Ø 1-1/4" (32 mm)
- Locking Device Holes: Ø 1-3/16" (30 mm)

Side View Dimensions:

- Overall Height: 31" (787 mm)
- Distance from base to top of leveling screw hole: 4" (102 mm)
- Distance from base to top of locking device holes: 6" (152 mm)
- Distance from base to top of locking device holes (alternative measurement): 22-3/16" (564 mm)
- Distance from base to top of locking device holes (alternative measurement): 9-1/4" (235 mm)
- Distance from base to top of locking device holes (alternative measurement): 9-3/4" (248 mm)
- Distance from base to top of locking device holes (alternative measurement): 28-1/2" (724 mm)
- Distance from base to top of locking device holes (alternative measurement): 29-1/8" (740 mm)
- Distance from base to top of locking device holes (alternative measurement): 6-1/2" (165 mm)
- Distance from base to top of locking device holes (alternative measurement): 7-3/4" (197 mm)
- Distance from base to top of locking device holes (alternative measurement): 3-1/2" (89 mm)
- Distance from base to top of locking device holes (alternative measurement): 1-1/4" OD
- Distance from base to top of locking device holes (alternative measurement): 3/8" Cold
- Distance from base to top of locking device holes (alternative measurement): 3/8" Hot
- Distance from base to top of locking device holes (alternative measurement): Ø 5/16" (8 mm) Hole in brackets
- Distance from base to top of locking device holes (alternative measurement): 4" (102 mm)

	ADA and TAS	Children's Environment ADA and TAS Ages 6-12 yrs
A	34" (864 mm)	31" (787 mm)
B	27" (686 mm)	24" (610 mm)
C	11" (279 mm)	11-1/16" (281 mm)
D	9" (229 mm)	9-1/16" (230 mm)
E	8" (203 mm)	8-1/16" (205 mm)

Basin configuration:	Single Bowl
Center(s):	8" (203 mm)
Bowl area:	Length: 14-3/8" (365 mm) Width: 12-5/16" (313 mm) Water depth: 3-1/4" (83 mm)
With overflow:	Yes
Number of deck holes:	3
Faucet hole(s):	1-3/8" (35 mm)
Drain hole:	1-3/4" (44 mm)

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.