



**Underscore®**  
60" x 32" alcove bath  
**K-20202-LA**

**Features**

- Convenient 19" step-over height retains the same depth as a standard 21" bath
- Integral lumbar support
- Slotted overflow allows for deep soaking
- Integral apron creates a clean, finished look
- Integral flange helps prevent water from seeping behind wall and simplifies alcove installation
- Textured bottom surface

**Material**

- Acrylic

**Installation**

- Left drain
- Requires K-7271 or K-7272 Clearflo slotted overflow bath drain (sold separately)
- Alcove

**Required Products/Accessories**

K-7271 Brass Slotted Overflow Bath Drain

or

K-7272 PVC Slotted Overflow Bath Drain

**Recommended Products/Accessories**

K-23726 Drain treatment



**ADA**

**Codes/Standards**

CSA B45.5/IAPMO Z124

ASTM E162

ASTM E662

ADA

ICC/ANSI A117.1

**KOHLER® Plastic Baths and Shower  
Bases Lifetime Limited Warranty**

See website for detailed warranty information.

**Available Colors/Finishes**


*Color tiles intended for reference only.*

**Color Code Description**




|                                                                                     |   |       |
|-------------------------------------------------------------------------------------|---|-------|
|  | 0 | White |
|-------------------------------------------------------------------------------------|---|-------|



**Underscore®**  
60" x 32" alcove bath  
**K-20202-LA**

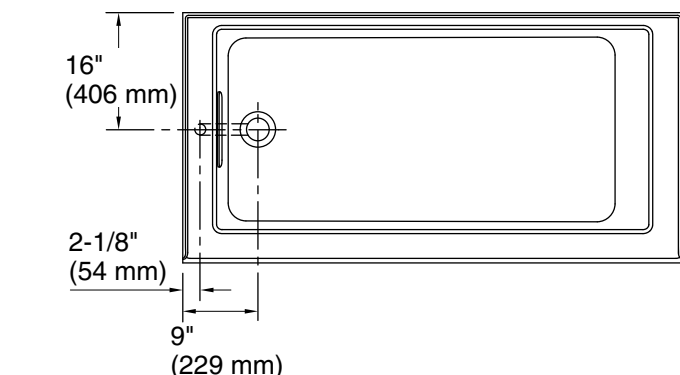

No change in measurements if connected with drain illustrated. (K-7272)

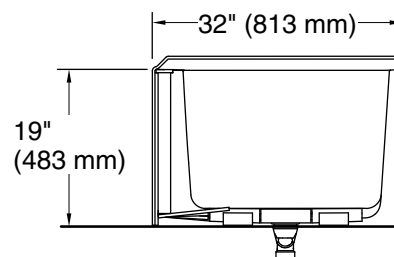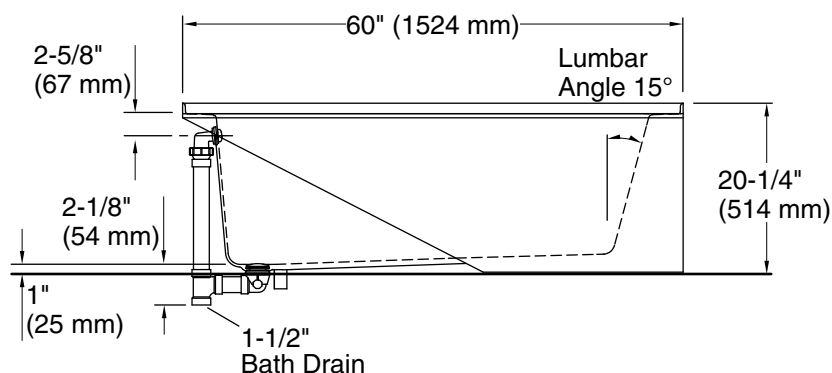

### Technical Information

All product dimensions are nominal.

|                        |                                  |
|------------------------|----------------------------------|
| Drain location:        | Left                             |
| Basin area, bottom:    | 46-1/4" x 22" (1175 mm x 559 mm) |
| Basin area, top:       | 52" x 24" (1321 mm x 610 mm)     |
| Weight:                | 100 lbs (45.4 kg)                |
| Minimum floor load:    | 56 lbs/ft² (273.4 kg/m²)         |
| Water depth:           | 15-1/2" (394 mm)                 |
| Water capacity:        | 68 gal (257.4 L)                 |
| Minimum flat for door: | 2-3/4" (70 mm)                   |

### Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

ADA compliant when installed to the specific requirements of these regulations.