

### Material

- Premium metal construction.
- For single-hole installation.
- KOHLER finishes resist corrosion and tarnishing.
- 5" (128 mm) spout reach.
- 7-5/16" (186 mm) spout height.
- 1.2 gal/min (4.5 l/min) maximum flow rate [max at 60 psi (4.14 bar)].
- KOHLER ceramic disc valves exceed industry longevity standards for a lifetime of durable performance.
- Single handle allows for both volume and temperature control.
- Includes metal touch-activated drain with 1-1/4" tailpiece.
- Ideal for vessel sink applications.
- Coordinates with Tempered™ faucets, accessories, and showering components to complete your bathroom.
- Pre-attached flexible supply lines simplify installation.
- Single lever handle allows for both volume and temperature control.
- Tall height complements vessel sinks.
- KOHLER® ceramic disc valves exceed industry longevity standards, ensuring durable performance for life.
- Includes metal pop-up drain with 1-1/4" tailpiece.
- 1.2 gpm (gallons per minute) flow rate.
- Coordinates with other products in the Tempered collection.
- Premium material construction.
- KOHLER finishes resist corrosion and tarnishing.
- For single-hole or 4-inch center installation (escutcheon plate included).
- Pre-attached flexible supply lines simplify installation.



**ADA** **CSA B651** **OBC**

### Codes/Standards

ASME A112.18.1/CSA B125.1  
 NSF/ANSI 61  
 NSF/ANSI 372  
 All applicable US Federal and State material regulations  
 DOE - Energy Policy Act 1992  
 EPA WaterSense®  
 California Energy Commission (CEC)  
 ADA  
 ICC/ANSI A117.1  
 CSA B651  
 OBC


### KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	CP	Polished Chrome
	SN	Vibrant® Polished Nickel
	BN	Vibrant® Brushed Nickel
	BL	Matte Black

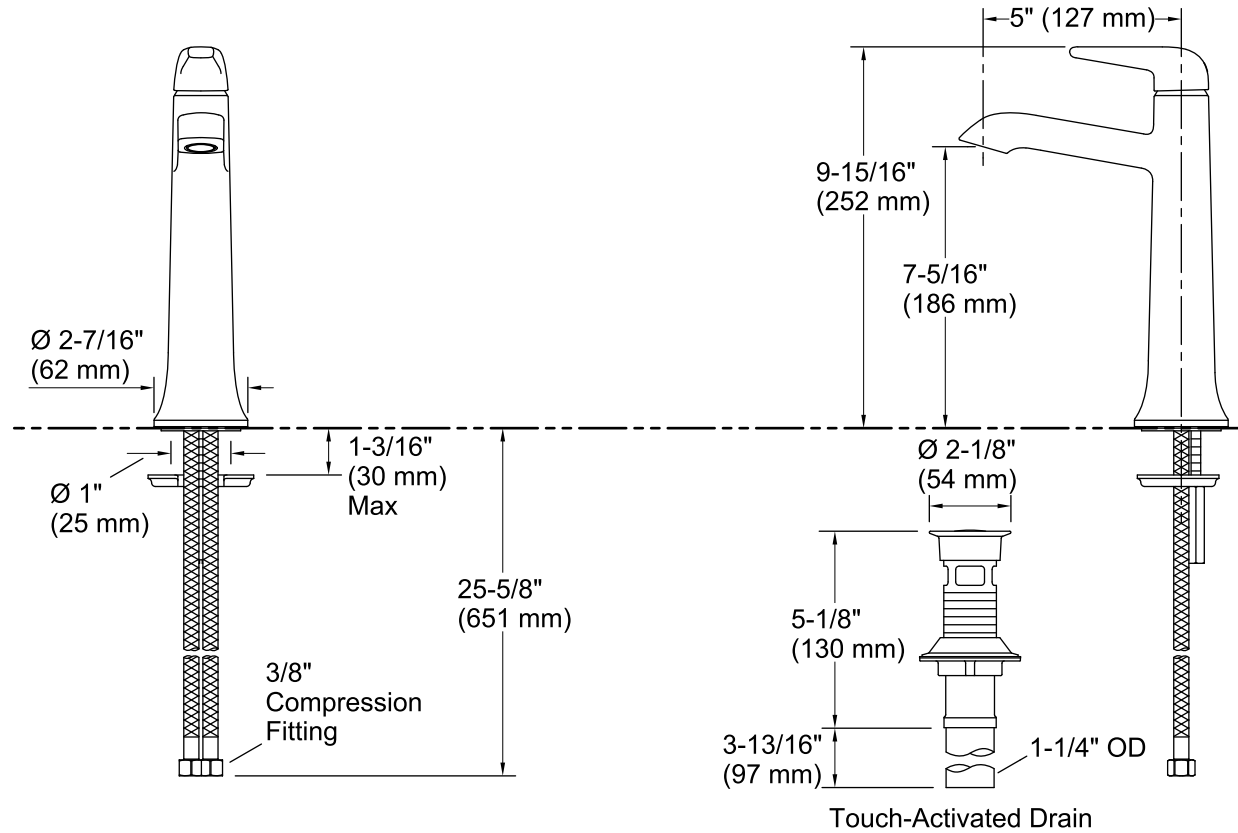

### Technical Information

All product dimensions are nominal.

#### Faucet:

Flow rate: 1.2 gal/min (4.5 l/min)

Pressure: 60 psi (4.1 bar)

Drain included: Yes

#### Spout:

Spout reach: 5" (128 mm)

### Notes

Install this product according to the installation instructions.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.