



# 60" x 34" freestanding bath with fluted shroud **K-24002**

### **Features**

- Freestanding design creates a striking focal point in your bathing area
- Oval basin creates a spacious bathing experience
- Integral lumbar support on both ends
- 16" (406 mm) depth offers a deep soaking experience
- Wide deck along one side simplifies installation and provides support for getting in and out of bath
- Fluted shroud
- Textured bottom surface

#### Material

Acrylic

## Installation

- Center drain
- Freestanding

# **Required Products/Accessories**

K-T37391 Rotary-turn bath drain trim K-T37392 Rotary-turn bath drain trim

or

K-78438 30" cable bath drain

## **Recommended Products/Accessories**

K-7265 Brass toe tap bath drain

K-T37393 Traditional rotary-turn bath drain trim

K-T37395 Bath drain trim

K-T37396 Traditional push-button bath drain trim

K-23726 Drain treatment



# Codes/Standards

CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662

# KOHLER® One-Year Limited WarrantyKOHLER® Hydrotherapy Components Five-Year Limited Warranty

See website for detailed warranty information.

#### Available Colors/Finishes

Color tiles intended for reference only.

**Color Code Description** 

0 White









# 60" x 34" freestanding bath with fluted shroud **K-24002**


No change in measurements if connected with drain illustrated. (K-37386)


Recommended Faucet Location

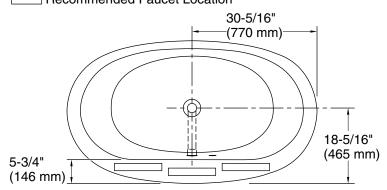



Recommended Faucet Hole Location

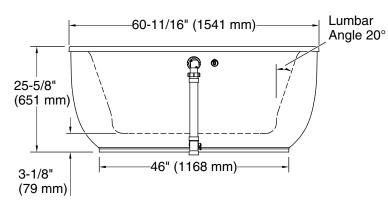

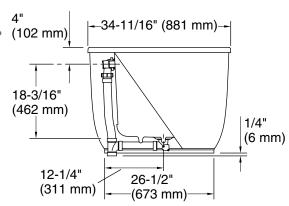

#### **Technical Information**

All product dimensions are nominal.

Drain location: Center

Basin area, bottom: 39-5/8" x 23-5/8" (1006 mm x 599 mm)

Basin area, top: 49-9/16" x 25-1/2" (1259 mm x 648 mm)

Weight: 170 lbs (77.1 kg)

Minimum floor load: 49.8 lbs/ft² (243.1 kg/m²)

Water depth: 16" (406 mm)
Water capacity: 60 gal (227.1 L)

Template: Footprint, 1364288, not required, not

included

#### **Notes**

Measure your actual product for rough-in details

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will

vary.

