

## Features

- Single lever design with lock screw
- Built-in check valves prevent migration of hot water to cold and cold water to hot water piping
- Complies with the Safe Drinking Water Act (SDWA)

## Material

- Solid-brass construction for durability and reliability

## Installation

- Installs easily between the stop valves and faucet



## Codes/Standards

NSF/ANSI/CAN 61  
NSF/ANSI/CAN 372

## KOHLER® One-Year Limited Warranty

See website for detailed warranty information.


## Available Colors/Finishes

*Color tiles intended for reference only.*

| Color | Code | Description |
|-------|------|-------------|
|-------|------|-------------|



|    |             |
|----|-------------|
| RP | Rough Plate |
|----|-------------|

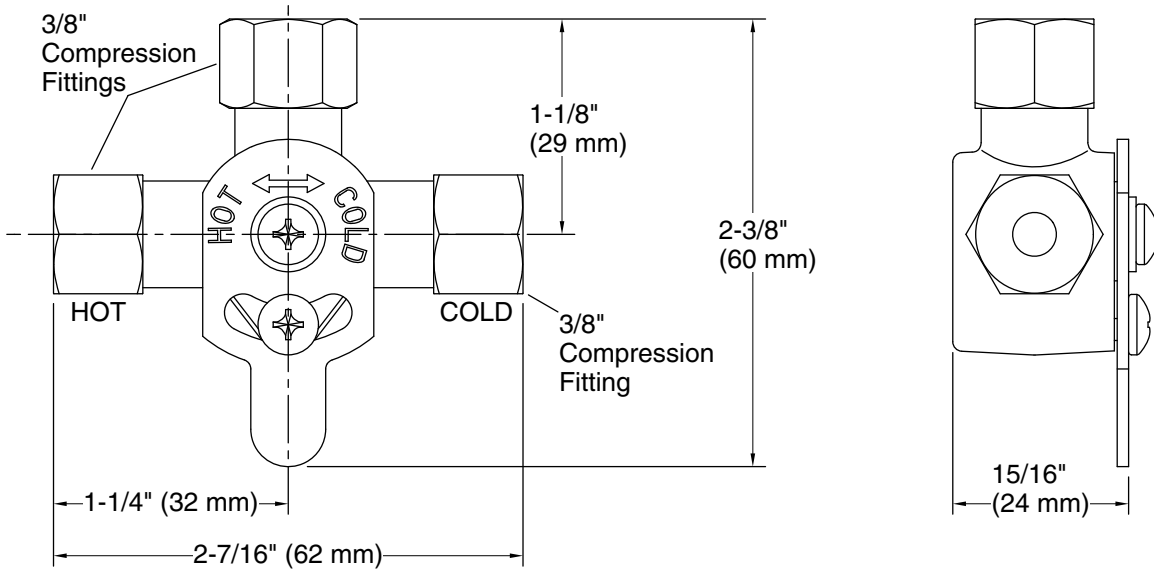

## Technical Information

All product dimensions are nominal.

Faucet flow rate: 3.5 gal/min (13.2 l/min)

## Spout:

## Notes

Install this product according to the installation instructions.