



**Vox®**  
16-1/4" square vessel bathroom sink  
**K-2661**

**Features**

- No faucet holes; requires wall- or counter-mount faucet

**Material**

- Vitreous china

**Installation**

- Vessel

**Recommended Products/Accessories**

K-23726 Drain treatment  
K-23725 Cast iron cleaner



ADA

CSA B651

**Codes/Standards**

ASME A112.19.2/CSA B45.1

ADA

ICC/ANSI A117.1

CSA B651

**KOHLER® Vitreous China Bathroom Sink Lifetime Limited Warranty**

See website for detailed warranty information.

**Available Colors/Finishes**

*Color tiles intended for reference only.*

| Color                                                                               | Code | Description  |
|-------------------------------------------------------------------------------------|------|--------------|
|  | 0    | White        |
|  | 96   | Biscuit      |
|  | 7    | Black Black™ |


1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada

9-29-2025 22:01 - US/CA

THE BOLD LOOK  
OF **KOHLER®**

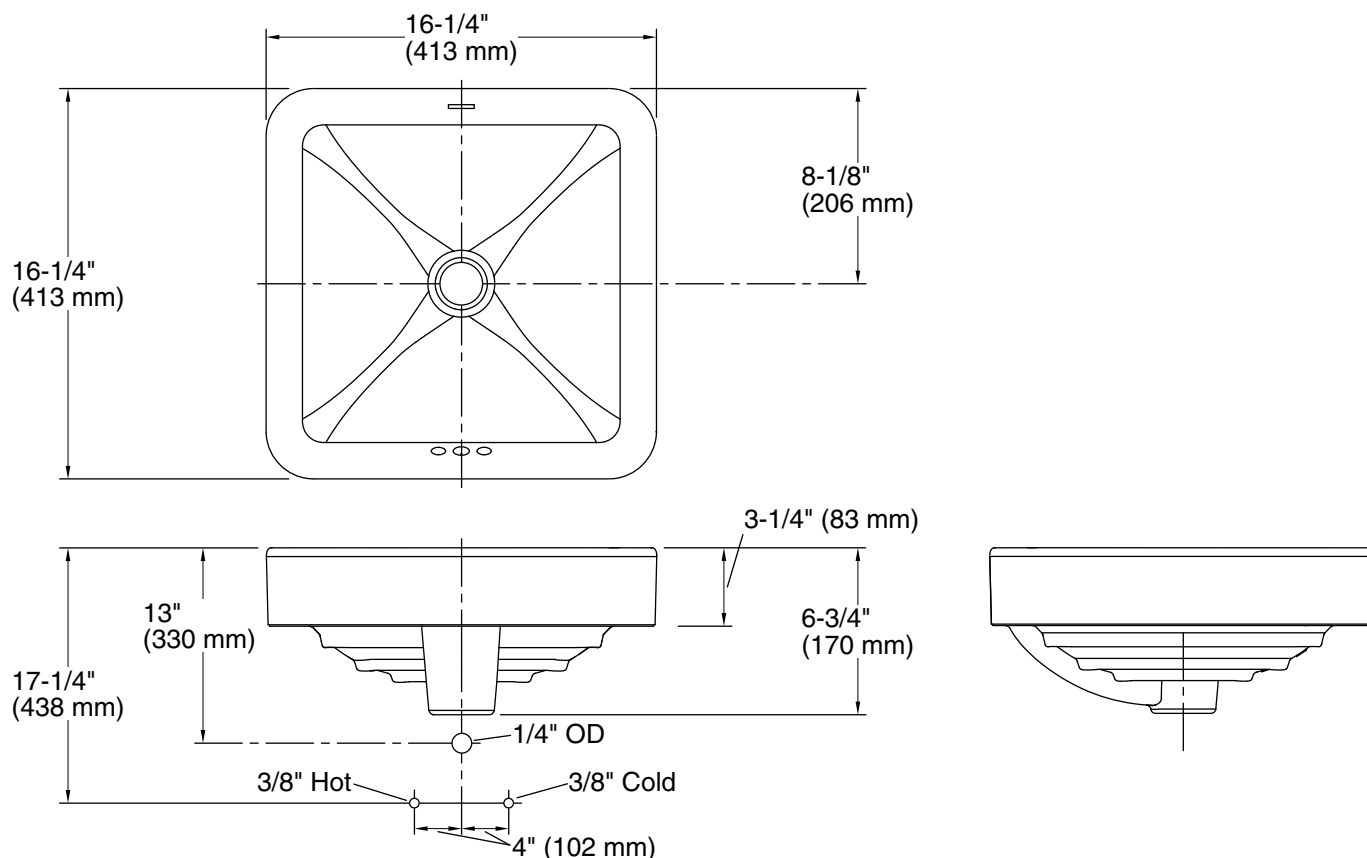

### Technical Information

All product dimensions are nominal.

Basin configuration: Single Bowl

Bowl area (Only): Length: 15-3/4" (400 mm)  
Width: 15-3/4" (400 mm)  
Water depth: 3-3/4" (95 mm)

With overflow: Yes

Drain hole: 1-3/4" (44 mm)

Template: 1144642-7, required, included

### Notes

Install this product according to the installation instructions.

Choose a faucet that will provide adequate clearance and will direct the water stream to the center of the bathroom sink.

**NOTICE:** Countertop manufacturer or cutter must use the cut-out template provided with the product or a current one provided by Kohler Co. (call 1-800-4KOHLER). Kohler Co. is not responsible for cut-out errors when incorrect cut-out template is used.

Product rests on countertop. Consider height when designing installation.

Product dimensions are nominal and may vary per ASME A112.19.2 tolerances.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.