Composed®

KOHLER Faucets

Touchless single-hole lavatory faucet with Kinesis® sensor technology, AC-powered, 0.5 gpm

K-27329

Features

- Kinesis® technology with concealed sensor allows for a clean aesthetic and provides extraordinarily accurate and reliable actuation in varying installation environments
- Below-counter valving reduces the faucet footprint and provides easier service
- 0.5 gpm (1.9 lpm) maximum flow rate with vandal-resistant outlet
- On-demand usage with 30-second max. continual run cycle to prevent vandalism and save water
- 18" (457 mm) stainless steel braided flexible supply hose for easy installation
- 6-7/16" (164 mm) spout reach
- Includes spout assembly, grid drain, control box assembly, mechanical mixer, supply hose, and standard mounting hardware
- Requires K-13480 single or K-13481 multiple AC adapter unit (sold separately)

Required Products/Accessories

K-13480-A AC Single Supply

or

K-13481-A Multi-Outlet Power Supply

Recommended Products/Accessories

K-23723 Faucet cleaner K-23726 Drain treatment

Included Components

K-7129-A Bathroom sink grid drain with overflow



ADA CSA B651 OBC

Codes/Standards

ASME A112.18.1/CSA B125.1 NSF/ANSI/CAN 61 NSF/ANSI/CAN 372 DOE - Energy Policy Act 1992 California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651 OBC

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.


Color	Code	Description
	CP	Polished Chrome
	2MB	Vibrant® Brushed Moderne
		Brass





Composed®

Touchless single-hole lavatory faucet with Kinesis® sensor technology, AC-powered, 0.5 gpm K-27329

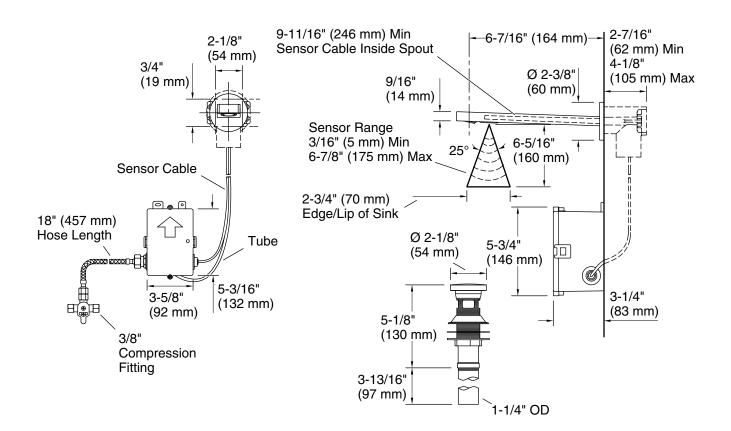

Required Electrical Service

One circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

120/240 V, 50/60 Hz

Technical Information

All product dimensions are nominal.

Power source: Hardwire - AC and Plug - AC, not

included

Faucet flow rate: 0.5 gal/min (1.9 l/min)

Drain included: Yes
Drain with overflow: Yes
Drain tailpiece Yes

included:

Spout:

Spout reach: 6-3/8" (163 mm)

Notes

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

