

Features

- Valve Only. Requires KOHLER® glass or metal sensor trim plate and AC or DC power supply (each sold separately) to complete full system solution. Faceplate determines flush volume.
- Designed to be serviceable through faceplate opening
- Adjustable connections for easy installation and servicing
- Fully mechanical manual override
- Lever-handle stop valve for quick and easy water control
- Chloramine and chlorine resistance on all rubber components exposed to waterway
- 125-micron filter protects internal components
- Not for use with PEX piping due to risk of dezincification

Material

- Durable brass construction

Installation

- Intended for toilet installations with 1-1/2" (38 mm) rear spud coupling connection

Optional Products/Accessories


K-35605 Rough-in bracket for concealed touchless flushometer valve (optional)

**Codes/Standards**

ASSE 1037/ASME A112.1037/CSA B125.37

**KOHLER® One-Year Limited
Warranty**

See website for detailed warranty information.

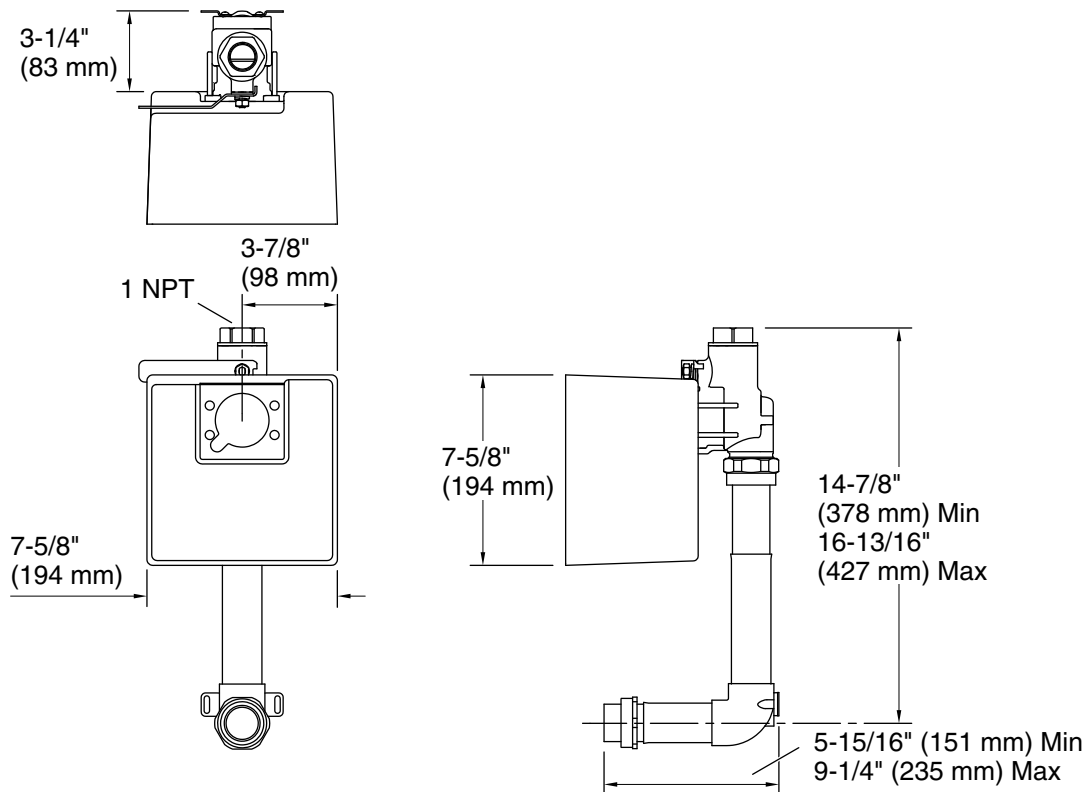

Technical Information

All product dimensions are nominal.

Pressure/fixture Supply Requirements

Fixture pressure 80 psi (551.6 kPa)
max (static):

Fixture pressure min 35 psi (241.3 kPa)
(static):

Min flow rate: 25 gpm (94.6 lpm)

Notes

Install this product according to the installation instructions.