

## Features

- Rounded glass shades join pristinely with decorative mounts, creating an elegant simplicity
- Height adjustable from 20-15/16" (532 mm) to 57" (1448 mm)
- Requires bulbs with medium (E26) base; type T10, T12, B10, or A19 bulbs recommended (sold separately)
- Suitable for damp locations, per UL 1598
- Includes installation hardware
- Coordinates with other products in the Crue collection
- Fixture is dimmable when paired with dimmer switch and compatible bulbs

## Material

- Manufactured with quality materials and complemented with a meticulous finishing process
- Durable finishes engineered to last and designed to coordinate with KOHLER faucet finishes



## Codes/Standards

UL 1598  
CSA C22.2 No. 250.0



## KOHLER® Indoor Lighting Fixtures Limited Warranty

See website for detailed warranty information.

## Available Colors/Finishes

*Color tiles intended for reference only.*

| Color                                                                               | Code | Description           |
|-------------------------------------------------------------------------------------|------|-----------------------|
|  | TTL  | Titanium              |
|  | BNL  | Brushed Nickel        |
|  | CPL  | Polished Chrome       |
|  | BLL  | Matte Black           |
|  | 2GL  | Brushed Moderne Brass |

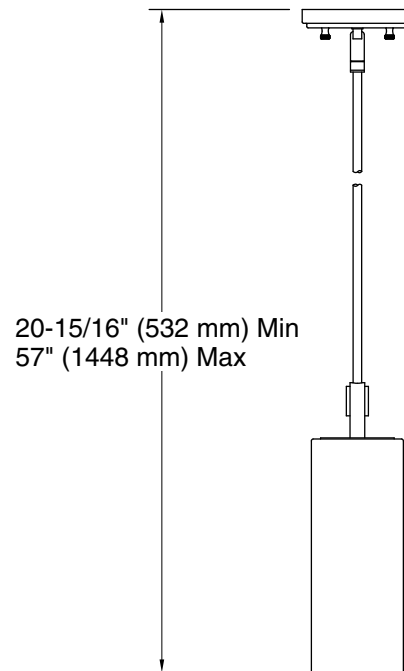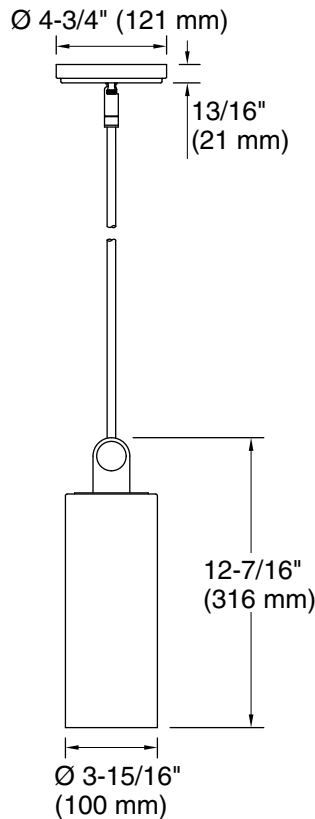

## Required Electrical Service

One circuit required.

120 V, 0.5 A, 60 Hz

## Technical Information

All product dimensions are nominal.

|                   |                                    |
|-------------------|------------------------------------|
| Material:         | Steel, Glass, Aluminum, Brass      |
| Number of Lights: | 1                                  |
| Lighting Type:    | Socket-based                       |
| Socket Type:      | E-26 Medium                        |
| Number of Shades: | 1                                  |
| Shade Type:       | Clear Glass                        |
| Hanging Type:     | Downrod                            |
| Downrod Detail:   | 3 x 12" (305 mm), 1 x 6" (152 mm)  |
| Height:           | 20-15/16" (532 mm) - 57" (1447 mm) |

## Notes

Install this product according to the installation instructions.