

45" undermount single-bowl workstation kitchen sink **K-3761**

Features

- 48" (1219 mm) minimum base cabinet width
- Single bowl with side platform
- Versatile design allows the side platform to be installed on right or left
- Includes a dishwasher-safe utensil tray
- Includes a versatile flip tray that works as a cutting board or large tray for food prep and cleaning
- Includes six microwave and dishwasher-safe prep bowls to maintain an organized cooking station
- Includes a large American walnut hardwood cutting board that provides a durable work surface that is beautiful, portable, and easy to clean
- Includes a stainless steel accessory storage rack to maintain a clutter-free sink area when accessories are not in use
- Includes sink rack
- Works with all standard countertop thicknesses. Pairs best with 30 mm countertop thickness if a flush surface between counter and cutting board is desired
- Includes installation hardware
- Sink drain with strainer sold separately

Material

Premium 16-gauge stainless steel

Installation

Undermount

Recommended Products/Accessories

K-8801 Sink drain and strainer with tailpiece

K-8799 Sink drain and strainer basket

K-23726 Drain treatment

K-23729 Stainless steel cleaner

Optional Products/Accessories

K-11352 Disposal Flange with Stopper

Included Components

K-6230 Utensil Tray

K-6231 Flip Tray

K-6232 Cutting Board

K-6233 Sink Rack

K-6235 Prep Bowls

K-6236 Accessory Storage Rack

91915 Hardware Kit



Codes/Standards

ASME A112.19.3/CSA B45.4


KOHLER® Stainless Steel Sinks Lifetime Limited Warranty

See website for detailed warranty information.





45" undermount single-bowl workstation kitchen sink K-3761

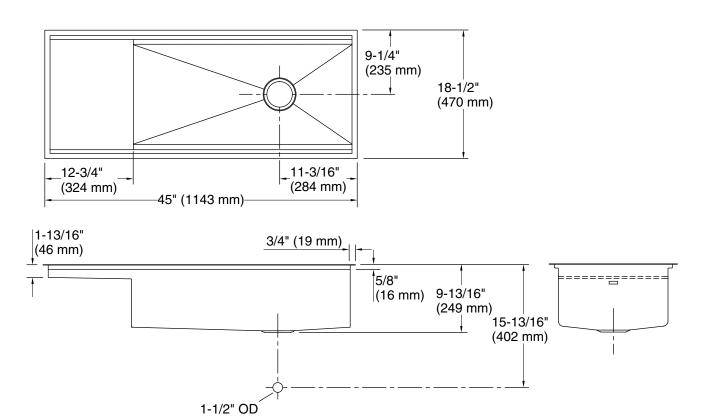

Technical Information

All product dimensions are nominal.

Basin configuration: Single Bowl Min. base cabinet 48" (1219 mm)

width:

Bowl area: Length: 43-1/2" (1105 mm)

Width: 17" (432 mm)

Bowl depth: 9-1/2" (241 mm)

Drain hole: 3-5/8" (92 mm)

Template: 1109794-7, required, included

Notes

Install this product according to the installation instructions.

